



BUREAU VERITAS

Test Report No.: RF180921W002-1



FCC TEST REPORT (PART 22)



| | |
|------------|---|
| Applicant: | Particle Industries, Inc |
| Address: | 126 Post St, 4th floor, San Francisco, CA 94108 USA |

| | |
|---------------------------|---|
| Manufacturer or Supplier: | Particle Industries, Inc |
| Address: | 126 Post St, 4th floor, San Francisco, CA 94108 USA |
| Product: | Boron 2G/3G |
| Brand Name: | Particle Industries, Inc |
| Model Name: | BRN310 |
| FCC ID: | 2AEMI-BRN310 |
| Date of tests: | Sep. 24, 2018 ~ Oct. 22, 2018 |

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H
- ANSI/TIA/EIA-603-D
- ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

| | |
|--|--|
| Prepared by Roger Li Engineer / Mobile Department | Approved by Sam Tung Manager / Mobile Department |
|  Date: Nov. 12, 2018 |  Date: Nov. 12, 2018 |

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

1.1 MEASUREMENT UNCERTAINTY 5

1.2 TEST SITE AND INSTRUMENTS 6

2 GENERAL INFORMATION 7

2.1 GENERAL DESCRIPTION OF EUT 7

2.2 CONFIGURATION OF SYSTEM UNDER TEST 8

2.3 DESCRIPTION OF SUPPORT UNITS 9

2.4 TEST ITEM AND TEST CONFIGURATION..... 9

2.5 EUT OPERATING CONDITIONS 11

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 11

3 TEST TYPES AND RESULTS..... 12

3.1 OUTPUT POWER MEASUREMENT 12

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 12

3.1.2 TEST PROCEDURES 12

3.1.3 TEST SETUP 13

3.1.4 TEST RESULTS 14

3.2 FREQUENCY STABILITY MEASUREMENT 16

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 16

3.2.2 TEST PROCEDURE 16

3.2.3 TEST SETUP 16

3.2.4 TEST RESULTS 16

3.3 OCCUPIED BANDWIDTH MEASUREMENT 17

3.3.1 TEST PROCEDURES 17

3.3.2 TEST SETUP 17

3.3.3 TEST RESULTS 17

3.4 BAND EDGE MEASUREMENT 18

3.4.1 LIMITS OF BAND EDGE MEASUREMENT 18

3.4.2 TEST SETUP 18

3.4.3 TEST PROCEDURES 18

3.4.4 TEST RESULTS 18

3.5 CONDUCTED SPURIOUS EMISSIONS..... 19

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 19

3.5.2 TEST PROCEDURE 19

3.5.3 TEST SETUP 19

3.5.4 TEST RESULTS 19

3.6 RADIATED EMISSION MEASUREMENT 20

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 20

3.6.2 TEST PROCEDURES 20

3.6.3 DEVIATION FROM TEST STANDARD 20

3.6.4 TEST SETUP 21



**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | |
|----------|---|-----------|
| 3.6.5 | TEST RESULTS | 23 |
| 3.7 | PEAK TO AVERAGE RATIO | 43 |
| 3.7.1 | LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT | 43 |
| 3.7.2 | TEST SETUP | 43 |
| 3.7.3 | TEST PROCEDURES | 43 |
| 3.7.4 | TEST RESULTS | 43 |
| 4 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 44 |
| 5 | INFORMATION ON THE TESTING LABORATORIES | 45 |
| 6 | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB | 46 |



BUREAU
VERITAS

Test Report No.: RF180921W002-1

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|----------------|-------------------|---------------|
| RF180921W002-1 | Original release | Nov. 12, 2018 |

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 22 & Part 2 | | | |
|--|------------------------------|---------------|--|
| STANDARD SECTION | TEST TYPE | RESULT | REMARK |
| 2.1046 22.913 (a) | Effective Radiated Power | PASS | Meet the requirement of limit. |
| 2.1055 22.355 | Frequency Stability | N/A(see note) | Meet the requirement of limit. |
| 2.1049 22.917b | Occupied Bandwidth | N/A(see note) | Meet the requirement of limit. |
| -- | Peak to average ratio* | N/A(see note) | Meet the requirement of limit. |
| 22.917 | Band Edge Measurements | N/A(see note) | Meet the requirement of limit. |
| 2.1051 22.917 | Conducted Spurious Emissions | N/A(see note) | Meet the requirement of limit. |
| 2.1053 22.917 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -19.08dB at 45.380MHz. |

Note: The product BRN310 is fully integrated the GSM/WCDMA module SARA-U201 (FCC ID: XPY1CGM5NNN), no other modification on the GSM/WCDMA module radio parameter such as power, frequency range, modulation etc., for this report only test Effective Radiated Power and Radiated Spurious Emissions, other test data are copied from the module report. Please refer to this report for details.

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|---------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.66dB |
| Radiated emissions | 9KHz ~ 30MHz | 2.68dB |
| | 30MHz ~ 1GHz | 3.26dB |
| | 1GHz ~ 18GHz | 4.48dB |
| | 18GHz ~ 40GHz | 4.12dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.2 TEST SITE AND INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|---|--------------|-------------------------------------|---------------------------------|------------|------------|
| MXE EMI Receiver | KEYSIGHT | N9038A-544 | MY54450026 | Mar. 16,18 | Mar. 15,19 |
| EXA Signal Analyzer | KEYSIGHT | N9010A-526 | MY54510322 | Mar. 16,18 | Mar. 15,19 |
| Bilog Antenna 1 | ETS-LINDGREN | 3143B | 00161964 | Nov. 26,16 | Nov. 25,18 |
| Bilog Antenna 2 | ETS-LINDGREN | 3143B | 00161965 | Nov. 26,16 | Nov. 25,18 |
| Horn Antenna 1 | ETS-LINDGREN | 3117 | 00168728 | Nov. 26,16 | Nov. 25,18 |
| Horn Antenna 2 | ETS-LINDGREN | 3117 | 00168692 | Nov. 26,16 | Nov. 25,18 |
| Loop antenna | Daze | ZN30900A | 0708 | Nov. 20,17 | Nov. 19,18 |
| Horn Antenna (18GHz-40GHz) | N/A | QWH-SL-18-40 -K-SG/QMS-00 361 | 15433 | Dec. 16,16 | Dec. 15,18 |
| Radio Communication Analyzer | ANRITSU | MT8820C | 6201465426 | Mar. 02,18 | Mar. 01,19 |
| Signal Pre-Amplifier | EMSI | EMC 9135 | 980249 | Jul. 09,18 | Jul. 08,19 |
| Signal Pre-Amplifier | EMSI | EMC 012645B | 980257 | Jul. 09,18 | Jul. 08,19 |
| Signal Pre-Amplifier | EMSI | EMC 184045B | 980259 | Jul. 09,18 | Jul. 08,19 |
| 3m Semi-anechoic Chamber | ETS-LINDGREN | 9m*6m*6m | Euroshieldpn- CT0001143-1216 | Apr. 21,18 | Apr. 20,19 |
| Test Software | E3 | V 9.160323 | N/A | N/A | N/A |
| Test Software | ADT | ADT_Radiated _V7.6.15.9.2 | N/A | N/A | N/A |
| 10dB Attenuator | JFW/USA | 50HF-010-SM A | 1505 | Jul. 09,18 | Jul. 08,19 |
| Power Meter | Anritsu | ML2495A | 1506002 | Mar. 02,18 | Mar. 01,19 |
| Power Sensor | Anritsu | MA2411B | 1339352 | Mar. 16,18 | Mar. 15,19 |
| Humid & Temp Programmable Tester | Juyi | ITH-120-45-CP -AR | IAA1504-001 | Jul. 09,18 | Jul. 08,19 |
| MXG Analog Microvave Signal Generator | KEYSIGHT | N5183A | MY50143024 | Mar. 13,18 | Mar. 12,19 |

NOTE: 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.

3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 525120.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | | |
|---------------------|---------------------------------------|---------------------|
| EUT | Boron 2G/3G | |
| MODEL NAME | BRN310 | |
| POWER SUPPLY | 5.0Vdc (Adapter) 3.7Vdc (battery) | |
| MODULATION TYPE | GSM/GPRS/EDGE | GMSK |
| | WCDMA | BPSK,QPSK |
| FREQUENCY RANGE | GSM/GPRS/EDGE | 824.2MHz ~ 848.8MHz |
| | WCDMA | 826.4MHz ~ 846.6MHz |
| MAX. ERP POWER | GSM | 553mW |
| | EDGE | 340mW |
| | WCDMA | 138mW |
| EMISSION DESIGNATOR | GSM | 245KGXW |
| | EDGE | 250KG7W |
| | WCDMA | 4M08F9W |
| ANTENNA TYPE | Fixed External antenna with 0dBi gain | |
| HW VERSION | V1.00 | |
| SW VERSION | V0.8.0 | |
| I/O PORTS | Refer to user's manual | |
| DATA CABLE | N/A | |


NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.




2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION

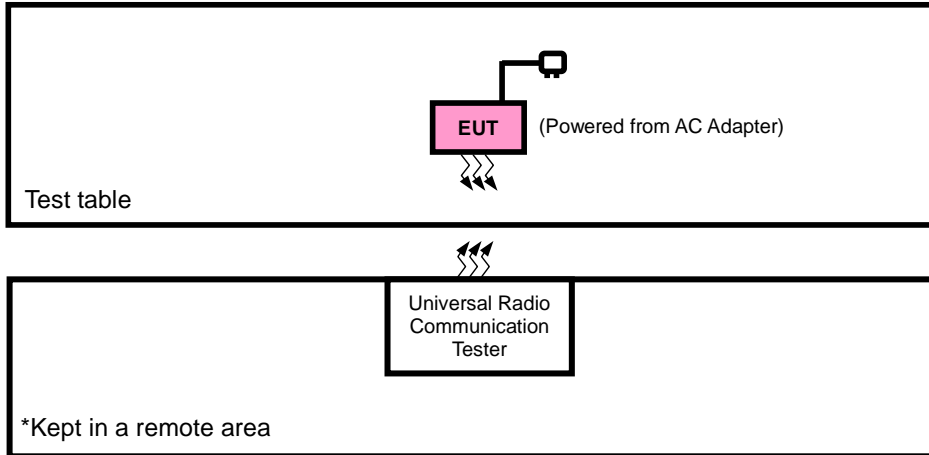

FOR CONDUCTED & E.R.P. TEST

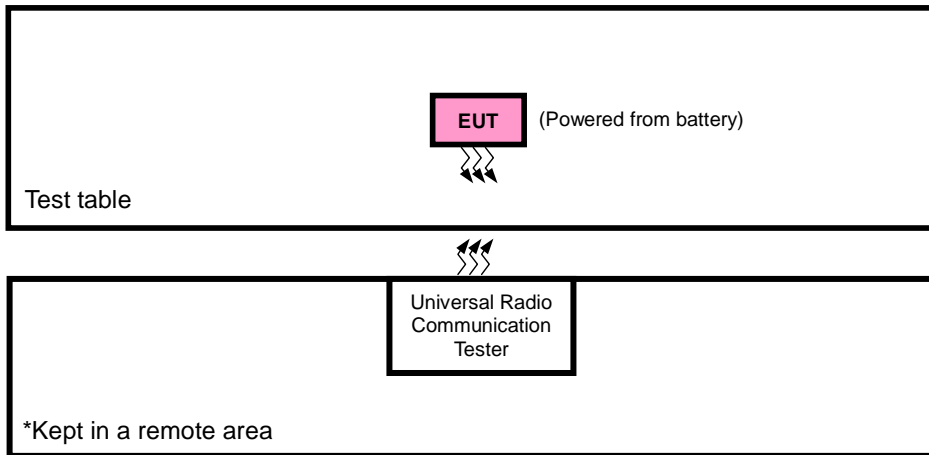

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-----------|----------|-----------|------------|--------|
| 1 | DC source | LONG WEI | PS-6403D | 010934269 | N/A |
| 2 | PC | HP | A6608CN | 3CR83825X3 | N/A |
| 3 | USB | N/A | N/A | N/A | N/A |
| 4 | Battery | N/A | N/A | N/A | N/A |
| 5 | Adapter | N/A | N/A | N/A | N/A |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | DC Line: Unshielded, Detachable 1.0m |
| 2 | AC Line: Unshielded, Detachable 1.5m |
| 3 | N/A |
| 4 | N/A |
| 5 | N/A |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM/EDGE /WCDMA. Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE MODE | DESCRIPTION |
|--------------------|---|
| A | EUT + Adapter + USB Cable+ Earphone with WCDMA link |
| B | EUT + Battery with WCDMA link |



GSM MODE

| EUT CONFIGURE MODE | TEST ITEM | AVAILABLE CHANNEL | TESTED CHANNEL | MODE |
|--------------------|---------------------|-------------------|----------------|-----------|
| B | ERP | 128 to 251 | 128, 189, 251 | GSM, EDGE |
| B | FREQUENCY STABILITY | 128 to 251 | 128, 251 | GSM, EDGE |
| B | OCCUPIED BANDWIDTH | 128 to 251 | 128, 189, 251 | GSM, EDGE |
| B | BAND EDGE | 128 to 251 | 128, 251 | GSM, EDGE |
| B | CONDCUDED EMISSION | 128 to 251 | 128, 189, 251 | GSM, EDGE |
| A | RADIATED EMISSION | 128 to 251 | 128, 189, 251 | GSM, EDGE |

WCDMA MODE

| EUT CONFIGURE MODE | TEST ITEM | AVAILABLE CHANNEL | TESTED CHANNEL | MODE |
|--------------------|---------------------|-------------------|------------------|-------|
| B | ERP | 4132 to 4233 | 4132, 4182, 4233 | WCDMA |
| B | FREQUENCY STABILITY | 4132 to 4233 | 4132, 4233 | WCDMA |
| B | OCCUPIED BANDWIDTH | 4132 to 4233 | 4132, 4182, 4233 | WCDMA |
| B | BAND EDGE | 4132 to 4233 | 4132, 4233 | WCDMA |
| B | CONDCUDED EMISSION | 4132 to 4233 | 4132, 4182, 4233 | WCDMA |
| A | RADIATED EMISSION | 4132 to 4233 | 4132, 4182, 4233 | WCDMA |

| TEST ITEM | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------------|--------------------------|---------------------|-----------|
| ERP | 23deg. C, 62%RH | 3.7Vdc from Battery | Rose Ma |
| FREQUENCY STABILITY | 23deg. C, 62%RH | DC 4.5V/5V/5.5V | Rain Wang |
| OCCUPIED BANDWIDTH | 23deg. C, 62%RH | 3.7Vdc from Battery | Rain Wang |
| BAND EDGE | 23deg. C, 62%RH | 3.7Vdc from Battery | Rain Wang |
| CONDCUDED EMISSION | 23deg. C, 62%RH | 3.7Vdc from Battery | Rain Wang |
| RADIATED EMISSION | 25deg. C, 63.6%RH | 5Vdc from adapter | Rose Ma |

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


3.1.3 TEST SETUP

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

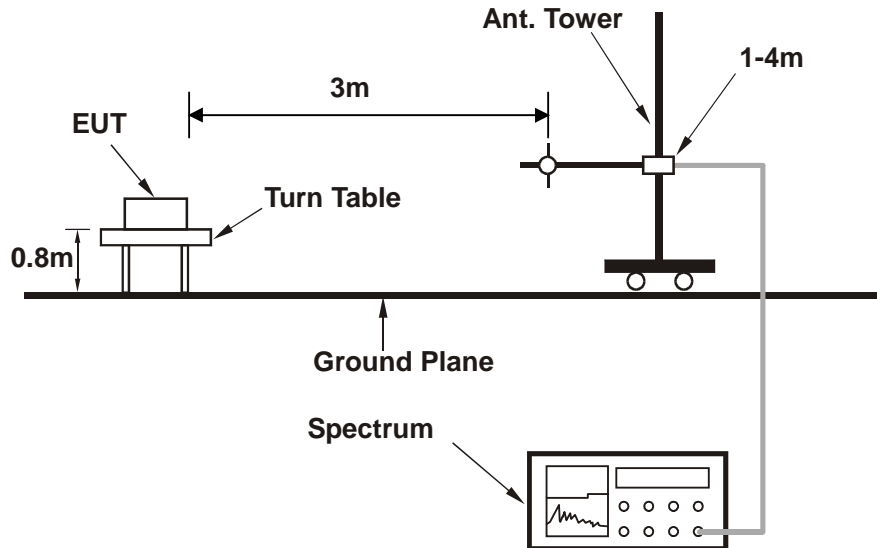


<Radiated Emission above 1 GHz>

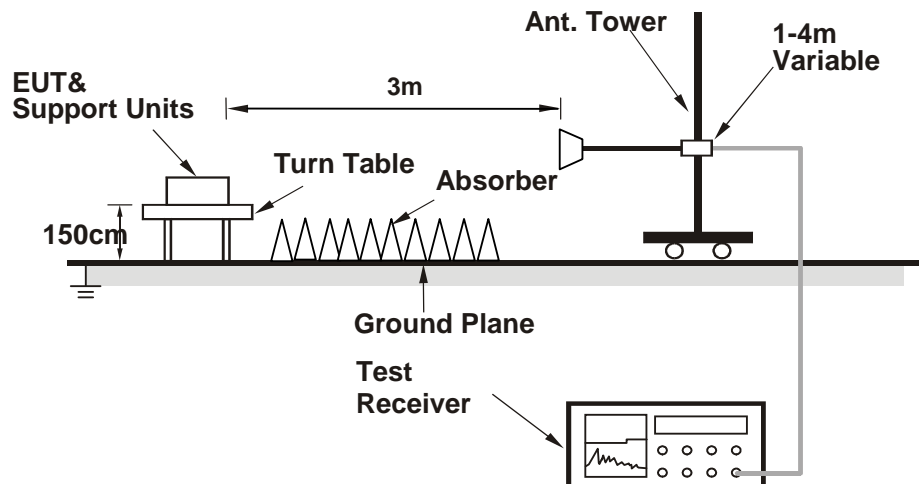

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:





3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.

ERP POWER (dBm)

GSM

| Channel | Frequency (MHz) | SPA LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) |
|---------|-----------------|---------------|-----------------------|----------|---------------|--------------------|
| 128 | 824.2 | -3.98 | 33.56 | 27.43 | 553.22 | H |
| 189 | 836.4 | -4.08 | 33.63 | 27.40 | 549.41 | H |
| 251 | 848.8 | -4.76 | 33.57 | 26.66 | 463.23 | H |
| 128 | 824.2 | -12.36 | 34.24 | 19.73 | 93.89 | V |
| 189 | 836.4 | -11.59 | 34.59 | 20.85 | 121.51 | V |
| 251 | 848.8 | -11.01 | 34.62 | 21.46 | 140.06 | V |

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

EDGE

| Channel | Frequency (MHz) | SPA LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) |
|---------|-----------------|---------------|-----------------------|----------|---------------|--------------------|
| 128 | 824.2 | -6.17 | 33.56 | 25.24 | 334.12 | H |
| 189 | 836.4 | -6.17 | 33.63 | 25.31 | 339.55 | H |
| 251 | 848.8 | -6.37 | 33.57 | 25.05 | 319.74 | H |
| 128 | 824.2 | -10.98 | 34.24 | 21.11 | 129.00 | V |
| 189 | 836.4 | -11.81 | 34.59 | 20.63 | 115.50 | V |
| 251 | 848.8 | -11.98 | 34.62 | 20.49 | 112.02 | V |

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

WCDMA

| Channel | Frequency (MHz) | SPA LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) |
|---------|-----------------|---------------|-----------------------|----------|---------------|--------------------|
| 4132 | 826.4 | -10.01 | 33.56 | 21.40 | 138.01 | H |
| 4182 | 836.4 | -10.42 | 33.63 | 21.06 | 127.61 | H |
| 4233 | 846.6 | -10.14 | 33.57 | 21.28 | 134.21 | H |
| 4132 | 826.4 | -15.34 | 34.24 | 16.75 | 47.27 | V |
| 4182 | 836.4 | -15.58 | 34.59 | 16.86 | 48.48 | V |
| 4233 | 846.6 | -16.87 | 34.62 | 15.60 | 36.33 | V |

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

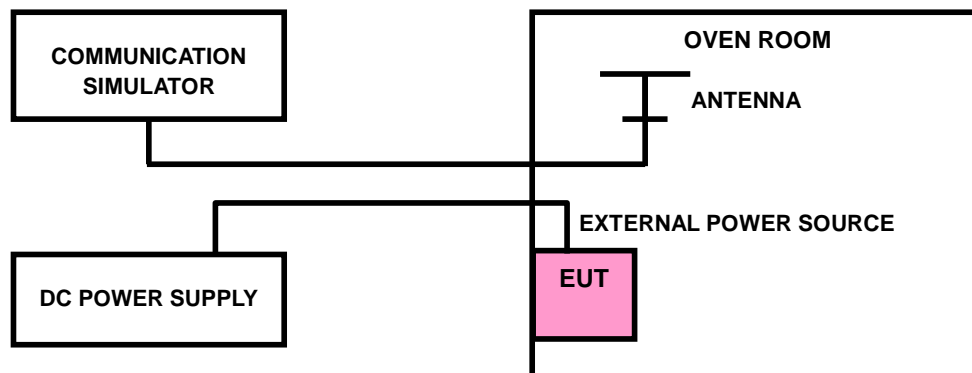

3.2.4 TEST RESULTS


The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

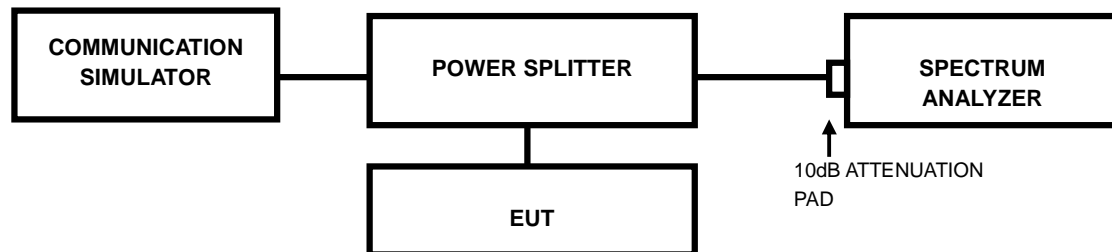

3.3.3 TEST RESULTS


The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

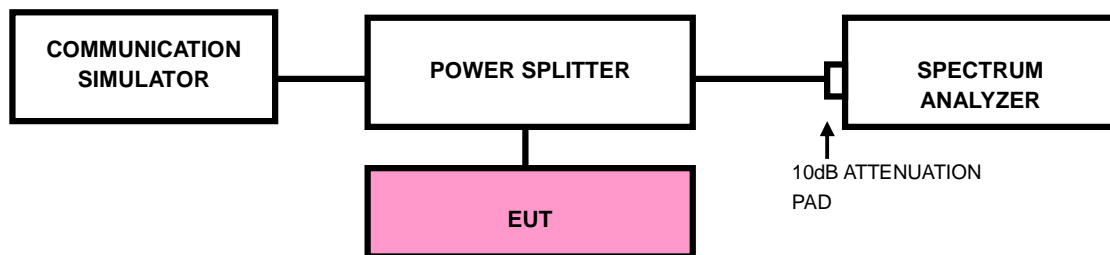

3.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- Record the max trace plot into the test report.

3.4.4 TEST RESULTS

The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

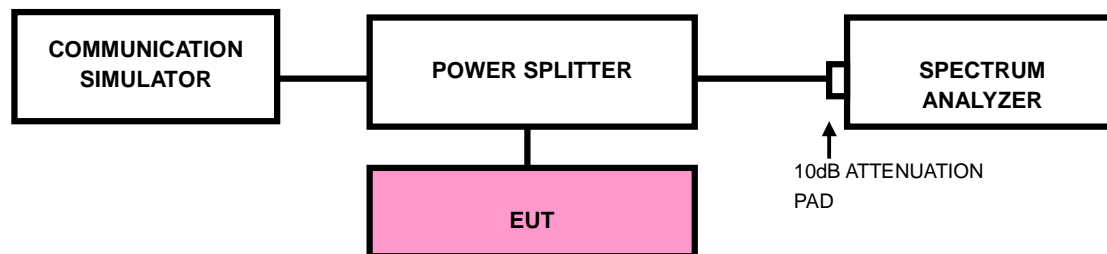

3.5.4 TEST RESULTS

The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP


<Below 30MHz>

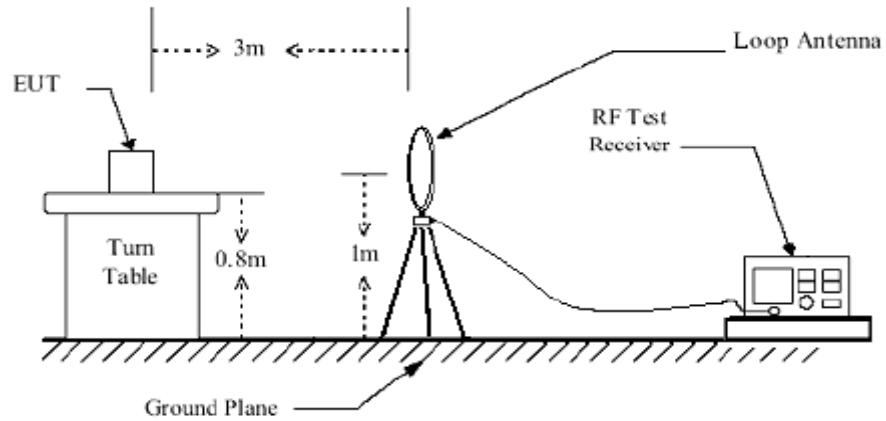

< Frequency Range 30MHz~1GHz >

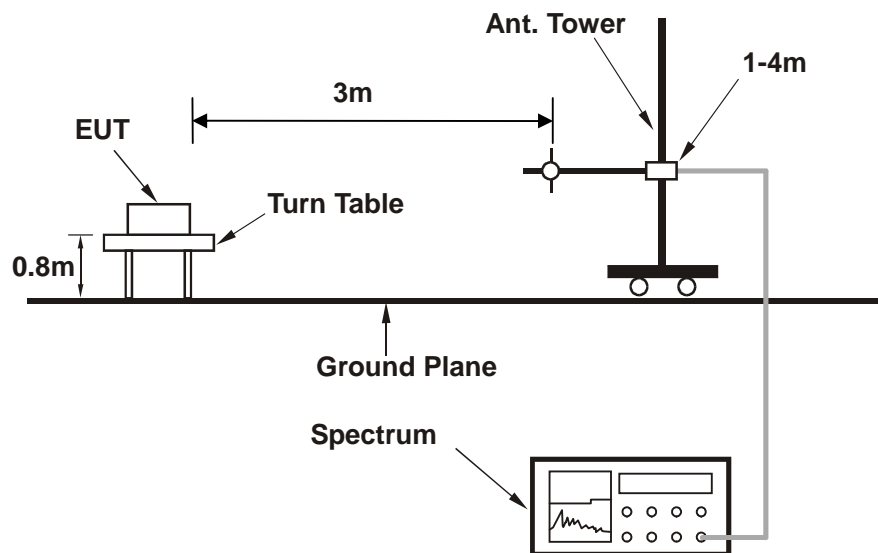

< Frequency Range above 1GHz >

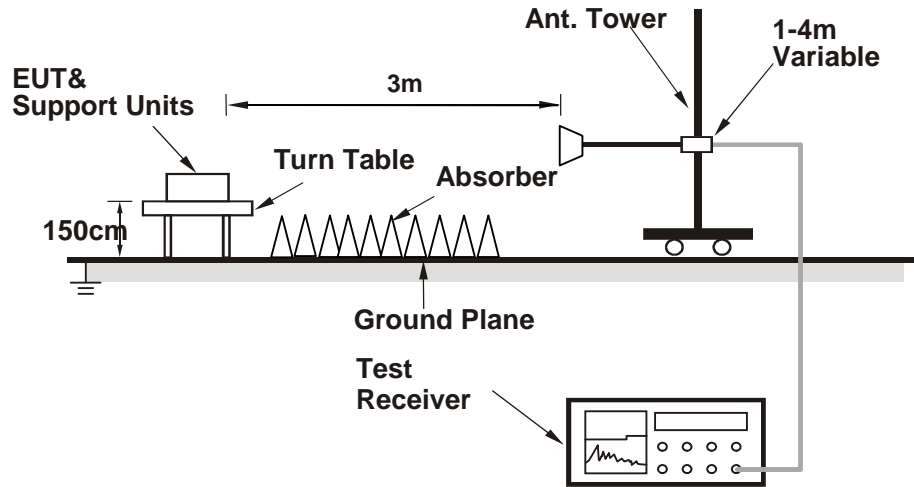

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:

WCDMA Band V:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4182 | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|---------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP | 45.380 | -32.08 | -39.44 | -13.00 | -19.08 | 7.36 | Peak | Horizontal |
| 2 | 68.790 | -46.96 | -35.22 | -13.00 | -33.96 | -11.74 | Peak | Horizontal |
| 3 | 132.480 | -50.16 | -33.14 | -13.00 | -37.16 | -17.02 | Peak | Horizontal |
| 4 | 202.340 | -58.77 | -41.58 | -13.00 | -45.77 | -17.19 | Peak | Horizontal |
| 5 | 278.000 | -61.44 | -46.55 | -13.00 | -48.44 | -14.89 | Peak | Horizontal |
| 6 | 296.780 | -60.84 | -46.87 | -13.00 | -47.84 | -13.97 | Peak | Horizontal |

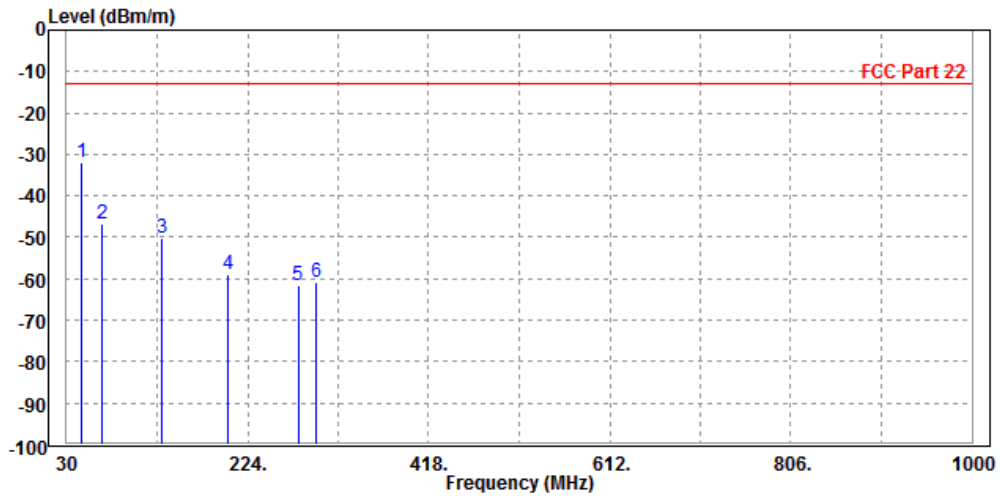




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4182 | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 48.980 | -41.38 | -36.98 | -13.00 | -28.38 | -4.40 | Peak | Vertical |
| 2 | 97.560 | -55.20 | -44.56 | -13.00 | -42.20 | -10.64 | Peak | Vertical |
| 3 | 156.890 | -58.15 | -42.66 | -13.00 | -45.15 | -15.49 | Peak | Vertical |
| 4 | 256.360 | -57.70 | -46.21 | -13.00 | -44.70 | -11.49 | Peak | Vertical |
| 5 | 302.800 | -55.07 | -43.79 | -13.00 | -42.07 | -11.28 | Peak | Vertical |
| 6 | 356.790 | -56.20 | -45.11 | -13.00 | -43.20 | -11.09 | Peak | Vertical |

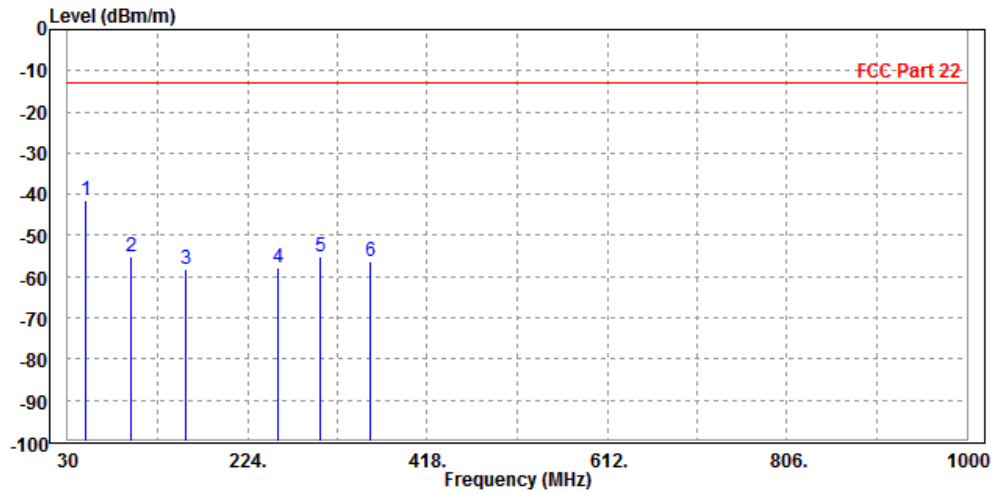



BUREAU VERITAS

Test Report No.: RF180921W002-1

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

GSM 850

CH 128:

| | | | |
|---|-----------------|-----------------|--------------------|
| MODE | TX channel 128 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1648.000 | -58.89 | -53.92 | -13.00 | -45.89 | -4.97 | Peak | Horizontal |
| 2 PP | 2472.600 | -57.99 | -56.33 | -13.00 | -44.99 | -1.66 | Peak | Horizontal |

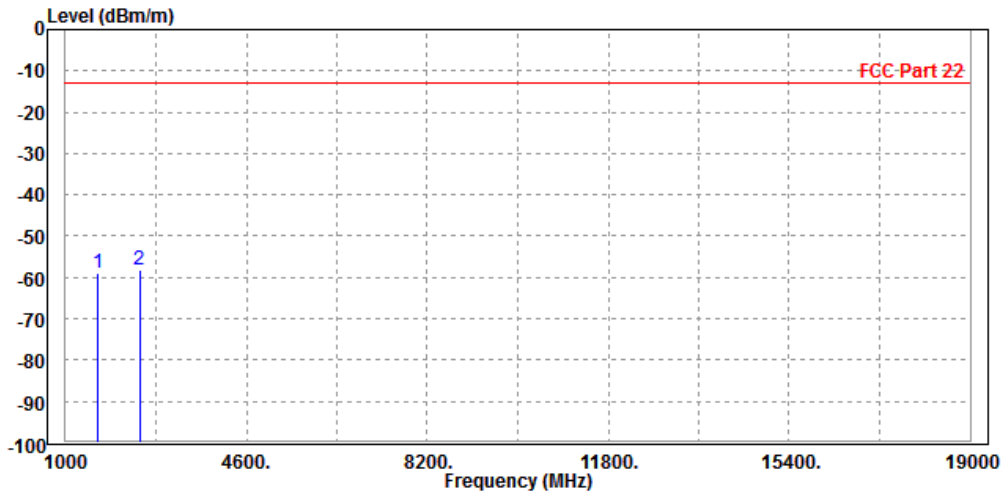




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 128 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1648.000 | -58.43 | -54.88 | -13.00 | -45.43 | -3.55 | Peak | Vertical |
| 2 | PP 2472.600 | -56.67 | -56.50 | -13.00 | -43.67 | -0.17 | Peak | Vertical |

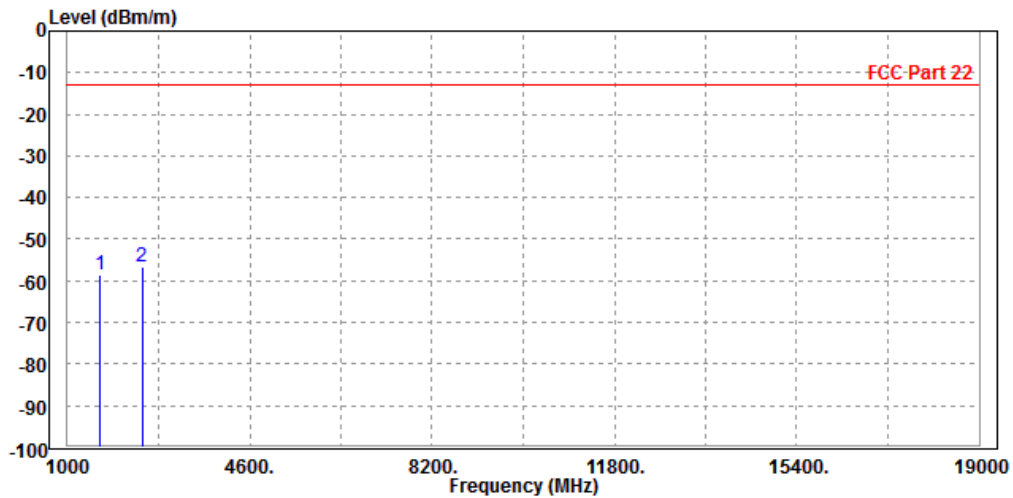




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

CH 189:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 189 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 1666.000 | -53.33 | -48.51 | -13.00 | -40.33 | -4.82 | Peak | Horizontal |
| 2 | 2509.200 | -56.62 | -55.02 | -13.00 | -43.62 | -1.60 | Peak | Horizontal |

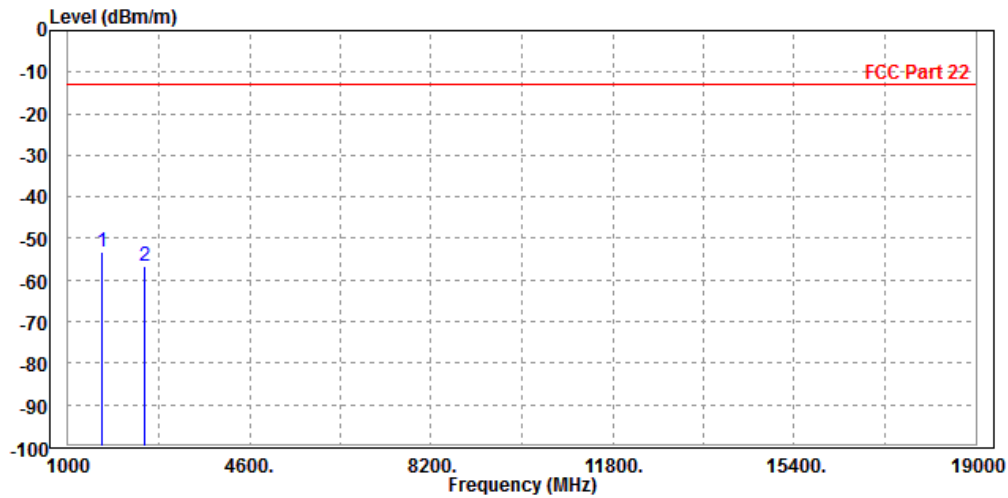




BUREAU VERITAS

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 189 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1666.000 | -58.19 | -54.81 | -13.00 | -45.19 | -3.38 | Peak | Vertical |
| 2 PP | 2509.200 | -54.48 | -54.35 | -13.00 | -41.48 | -0.13 | Peak | Vertical |

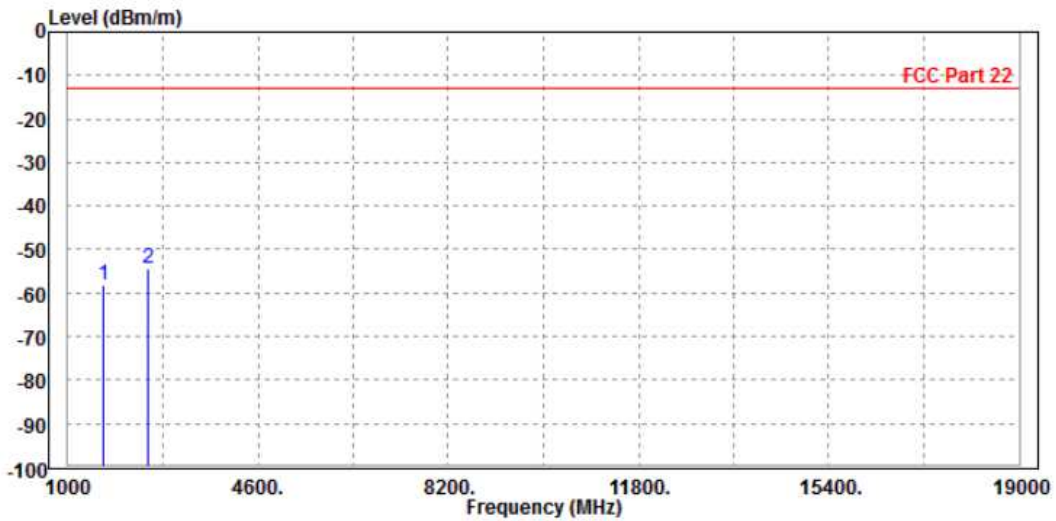




BUREAU VERITAS

Test Report No.: RF180921W002-1

CH 251:

| | | | |
|---|-----------------|-----------------|--------------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1702.000 | -58.85 | -54.33 | -13.00 | -45.85 | -4.52 | Peak | Horizontal |
| 2 | PP 2546.400 | -57.94 | -56.48 | -13.00 | -44.94 | -1.46 | Peak | Horizontal |

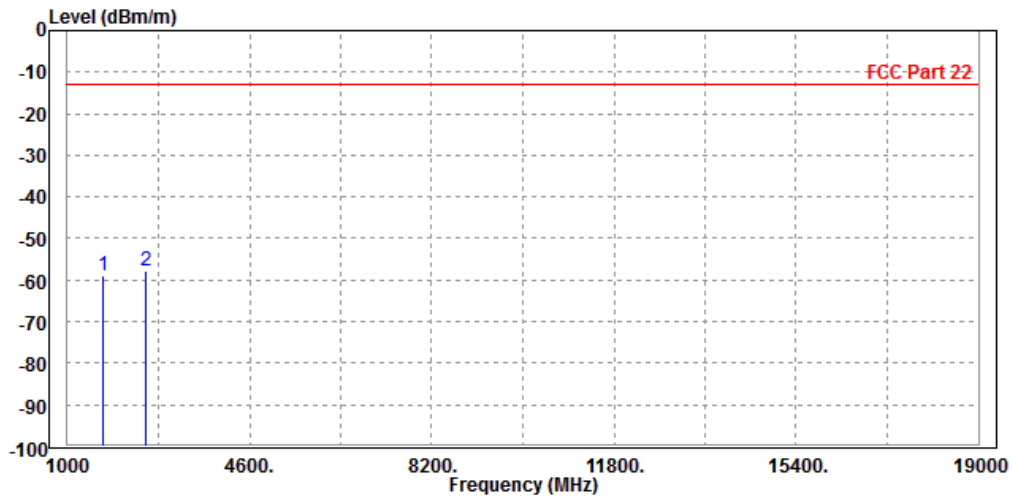




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1702.000 | -59.53 | -56.48 | -13.00 | -46.53 | -3.05 | Peak | Vertical |
| 2 | PP 2546.400 | -56.33 | -56.36 | -13.00 | -43.33 | 0.03 | Peak | Vertical |

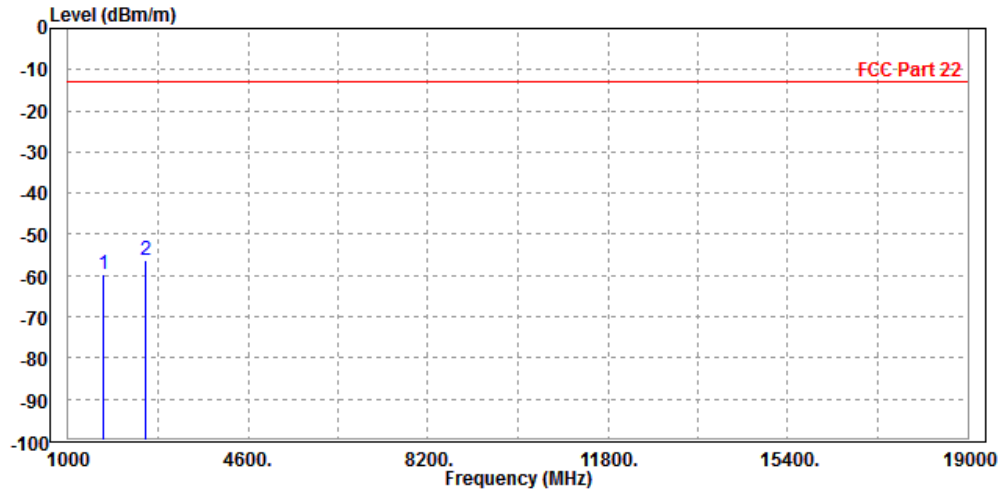



**BUREAU
VERITAS**


Test Report No.: RF180921W002-1

EDGE 850:

CH 128:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 128 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1648.000 | -59.67 | -54.70 | -13.00 | -46.67 | -4.97 | Peak | Horizontal |
| 2 PP | 2472.600 | -57.58 | -55.92 | -13.00 | -44.58 | -1.66 | Peak | Horizontal |

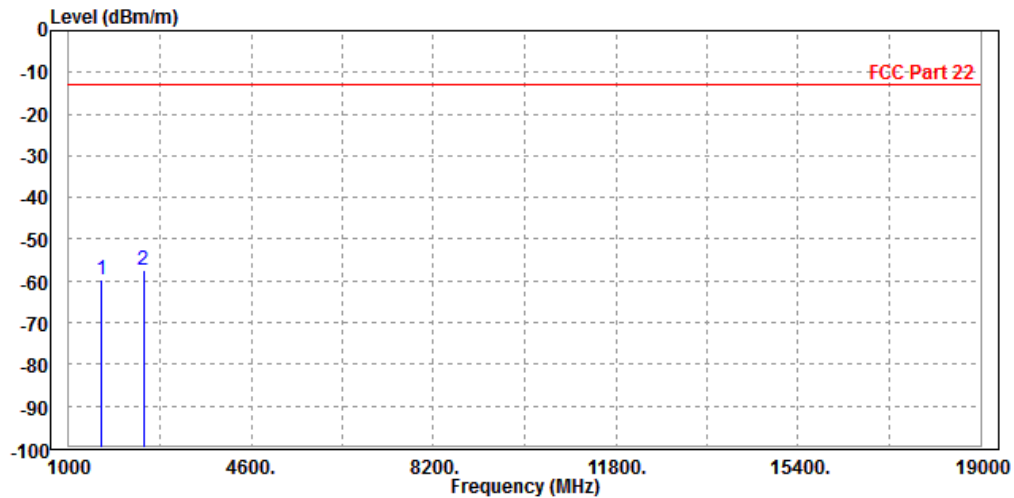




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 128 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Read | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|---------------------|
| Freq | Level | Level | Line | Limit | Factor | Remark |
| MHz | dBm/m | dBm | dBm/m | dB | dB/m | Pol/Phase |
| 1 | 1648.000 | -58.54 | -54.99 | -13.00 | -45.54 | -3.55 Peak Vertical |
| 2 | PP 2472.600 | -56.87 | -56.70 | -13.00 | -43.87 | -0.17 Peak Vertical |

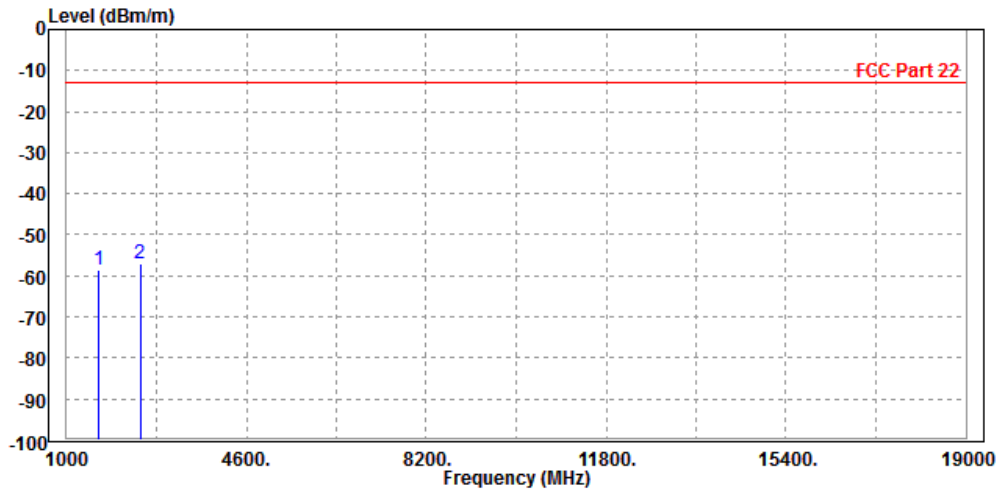




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

CH 189:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 189 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1666.000 | -58.91 | -55.53 | -13.00 | -45.91 | -3.38 | Peak | Vertical |
| 2 | PP 2509.200 | -57.28 | -57.15 | -13.00 | -44.28 | -0.13 | Peak | Vertical |

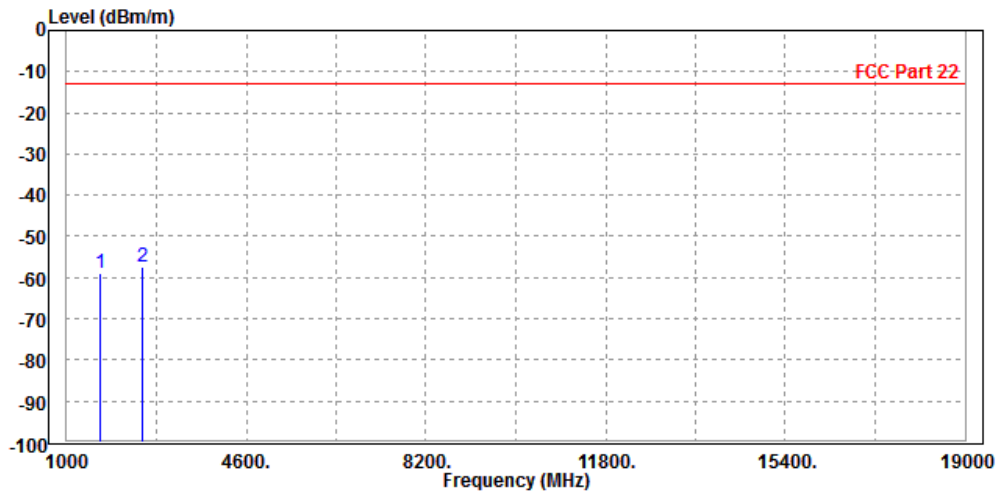




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 189 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |


| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1672.800 | -59.56 | -54.80 | -13.00 | -46.56 | -4.76 | Peak | Horizontal |
| 2 PP | 2509.200 | -57.81 | -56.21 | -13.00 | -44.81 | -1.60 | Peak | Horizontal |

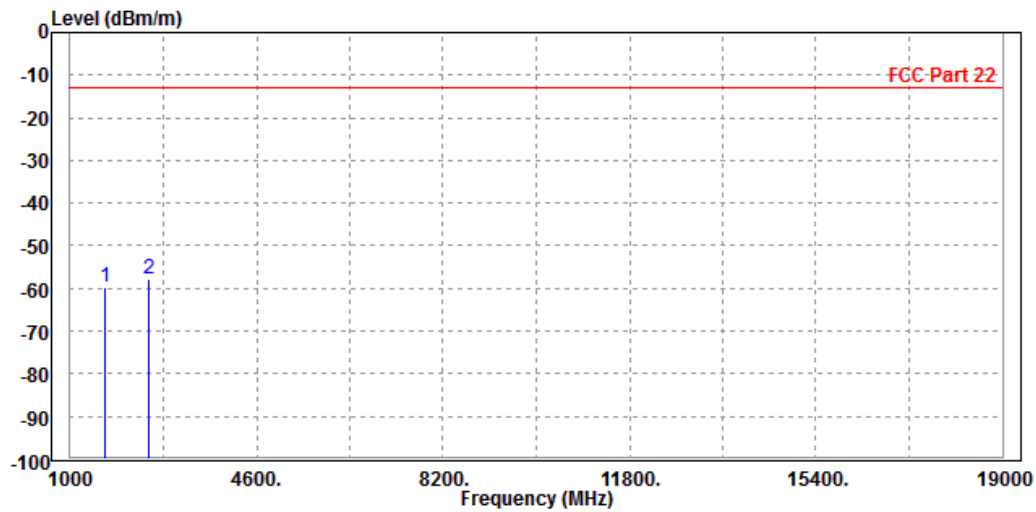

CH 251:

| | | | |
|--|-----------------|-----------------|--------------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Read | Limit | Over | | | | |
|---------------|--------|--------|--------|--------|--------|--------|------------|
| Freq | Level | Level | Line | Limit | Factor | Remark | Pol/Phase |
| MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 PP 1702.000 | -58.18 | -53.66 | -13.00 | -45.18 | -4.52 | Peak | Horizontal |
| 2 2546.400 | -58.26 | -56.80 | -13.00 | -45.26 | -1.46 | Peak | Horizontal |

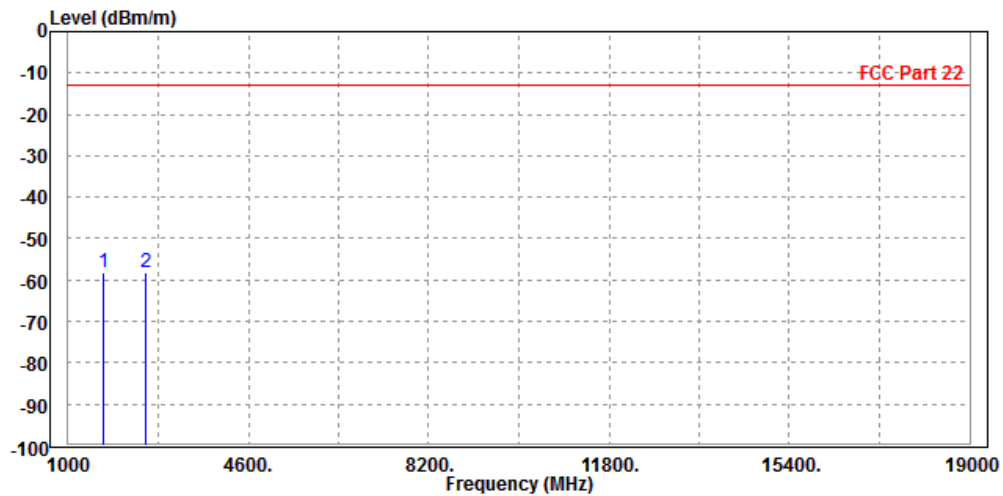




BUREAU VERITAS

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|-----------------|--------------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Read | Limit | Over | | | | |
|------|-------------|--------|--------|--------|--------|------------|----------|
| Freq | Level | Level | Line | Limit | Factor | Remark | |
| MHz | dBm/m | dBm | dBm/m | dB | dB/m | Pol/Phase | |
| 1 | 1702.000 | -57.77 | -54.72 | -13.00 | -44.77 | -3.05 Peak | Vertical |
| 2 | PP 2546.400 | -56.53 | -56.56 | -13.00 | -43.53 | 0.03 Peak | Vertical |

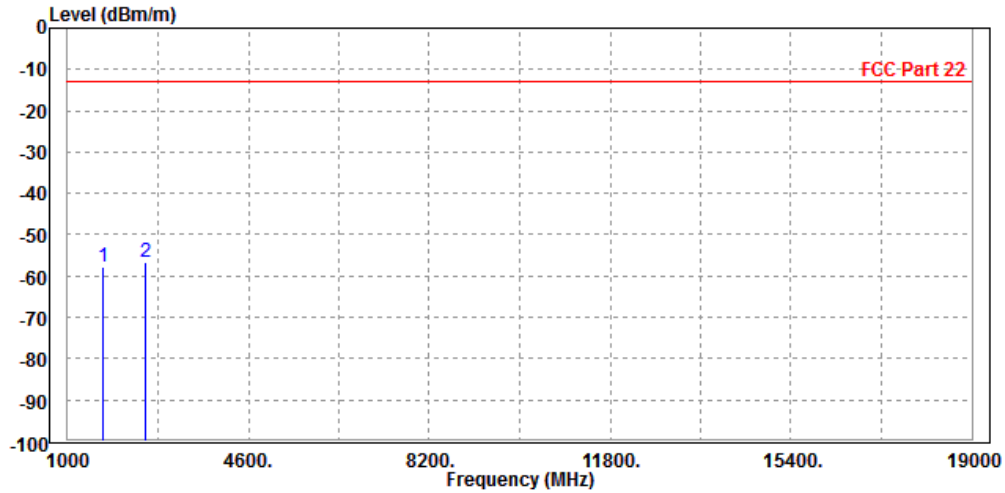


WCDMA Band V:

CH 4132:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4132 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 1648.000 | -41.58 | -36.61 | -13.00 | -28.58 | -4.97 | Peak | Horizontal |
| 2 | 2479.200 | -54.74 | -53.09 | -13.00 | -41.74 | -1.65 | Peak | Horizontal |

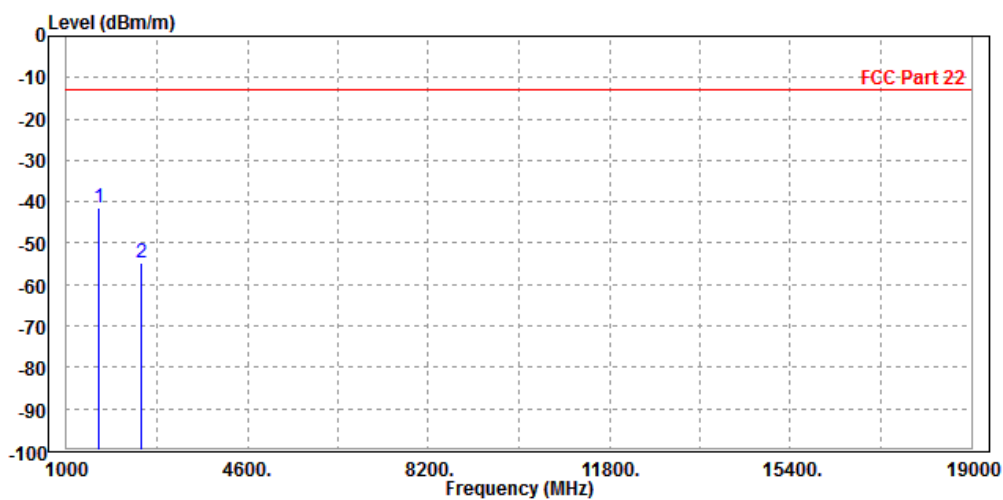




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4132 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 1648.000 | -49.78 | -46.23 | -13.00 | -36.78 | -3.55 | Peak | Vertical |
| 2 | 2479.200 | -56.40 | -56.23 | -13.00 | -43.40 | -0.17 | Peak | Vertical |

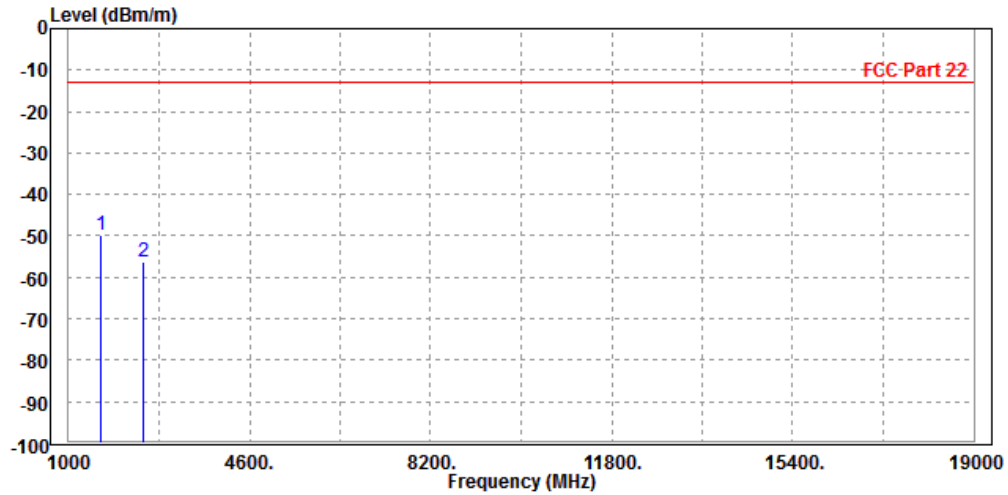




BUREAU VERITAS

Test Report No.: RF180921W002-1

CH 4182:

| | | | |
|---|-----------------|-----------------|--------------------|
| MODE | TX channel 4182 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Read Level | Limit Level | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|------------|-------------|------------|--------|------------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | |
| 1 | 1666.000 | -59.28 | -54.46 | -13.00 | -46.28 | -4.82 Peak | Horizontal |
| 2 | PP 2509.200 | -57.94 | -56.34 | -13.00 | -44.94 | -1.60 Peak | Horizontal |

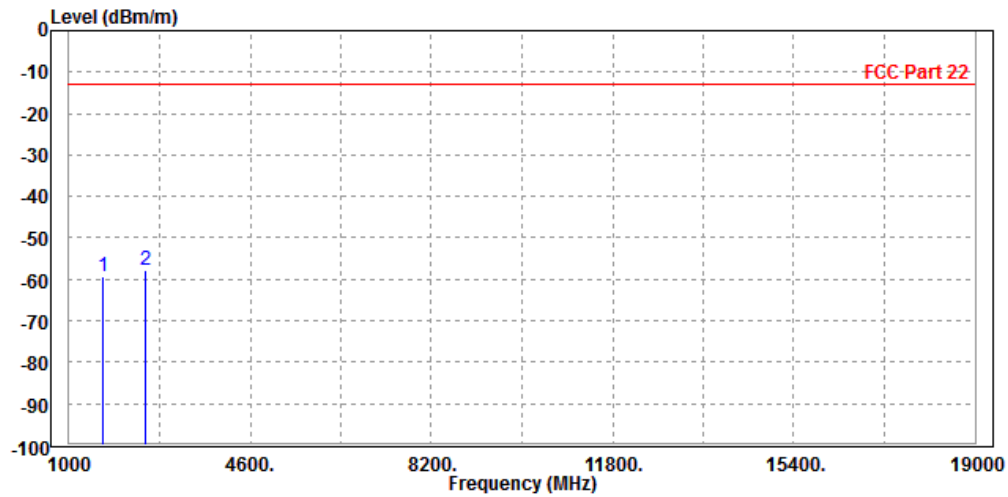




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4182 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | 1666.000 | -59.14 | -55.76 | -13.00 | -46.14 | -3.38 | Peak | Vertical |
| 2 | PP 2509.200 | -55.99 | -55.86 | -13.00 | -42.99 | -0.13 | Peak | Vertical |

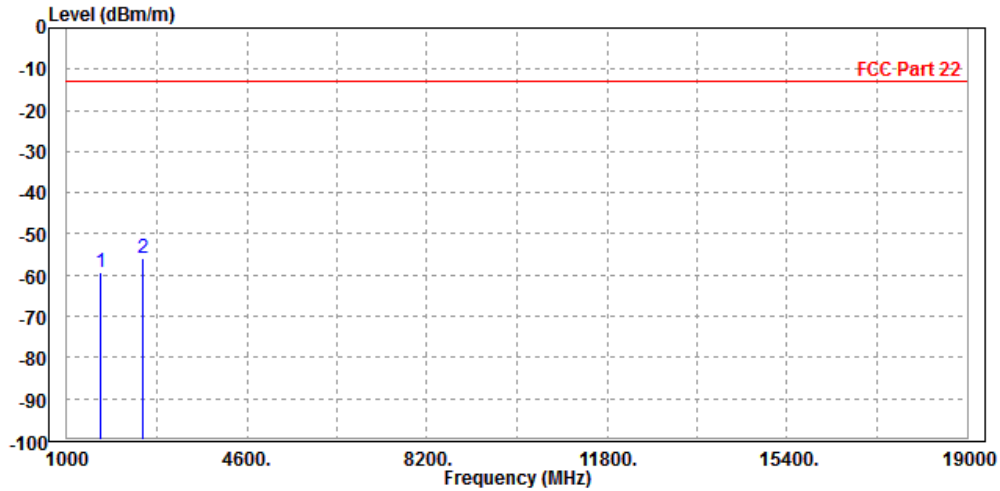




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

CH 4233:

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4233 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 1702.000 | -45.02 | -40.50 | -13.00 | -32.02 | -4.52 | Peak | Horizontal |
| 2 | 2539.800 | -54.36 | -52.87 | -13.00 | -41.36 | -1.49 | Peak | Horizontal |

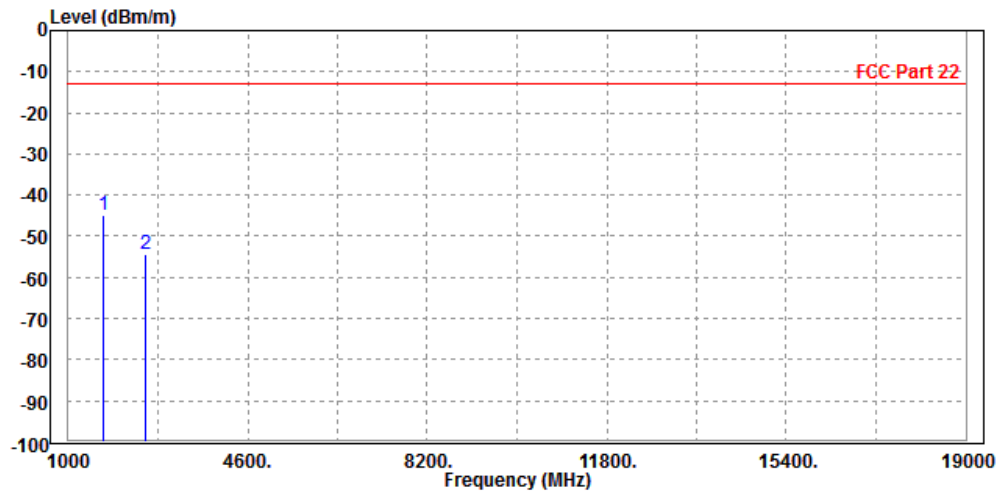




**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

| | | | |
|--|-----------------|------------------------|--------------------|
| MODE | TX channel 4233 | FREQUENCY RANGE | Above 1000MHz |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 70%RH | INPUT POWER | DC 5V from adapter |
| TESTED BY | Rose Ma | | |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | |

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBm/m | dBm | dBm/m | dB | dB/m | | |
| 1 | PP 1702.000 | -51.09 | -48.04 | -13.00 | -38.09 | -3.05 | Peak | Vertical |
| 2 | 2539.800 | -56.10 | -56.10 | -13.00 | -43.10 | 0.00 | Peak | Vertical |

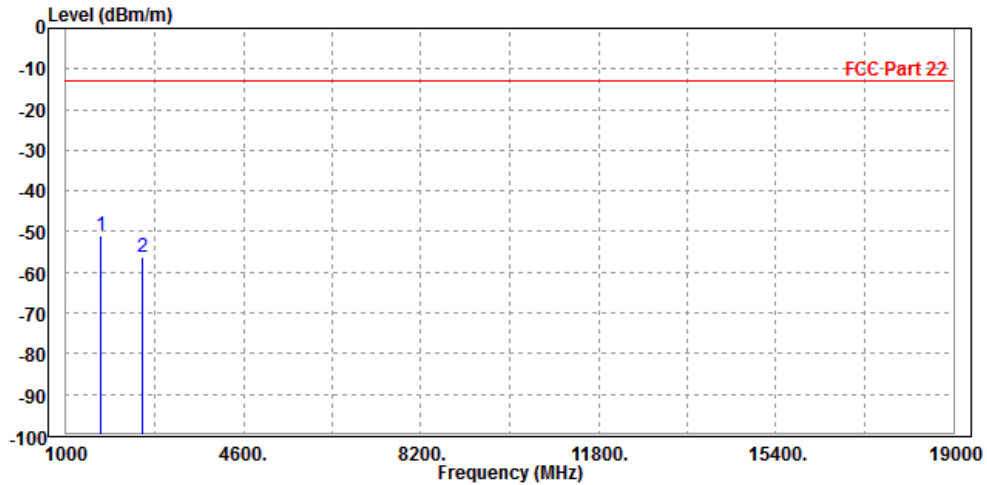


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

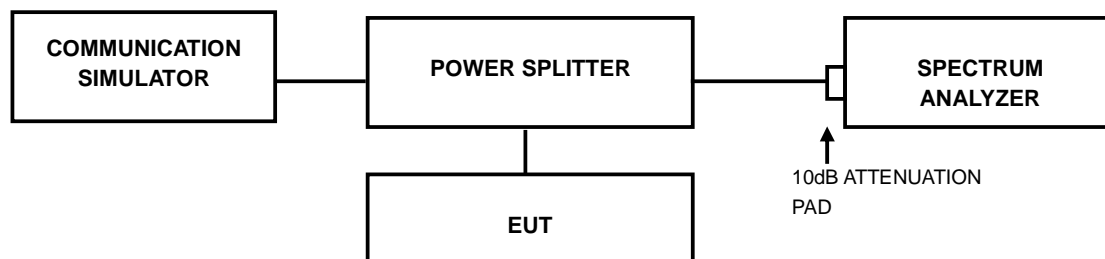

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

The test results were recorded in Reports No.: 16-1-0019501T07a & 16-1-0019501T05a.



**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF180921W002-1

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



**BUREAU
VERITAS**

Test Report No.: RF180921W002-1

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---