



Test Report No.: IC2011WDG0364-1



# TEST REPORT

Applicant	Particle Industries, Inc
Address	126 Post St, 4th floor, San Francisco, CA 94108 USA

Manufacturer or Supplier	Particle Industries, Inc
Address	126 Post St, 4th floor, San Francisco, CA 94108 USA
Product	Boron LTE
Brand Name	Particle
Model	BRN402
Additional Model & Model Difference	BRN404; see items 3.1
Date of tests	Sep. 03, 2018 ~ Nov. 08, 2018

the tests have been carried out according to the requirements of the following standard:

- Canada RSS-247 Issue 2 (2017-02)
- Canada RSS-Gen Issue 5 (2019-03)

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Breeze Jiang Senior Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	Date: Jan. 12, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

**2 MEASUREMENT UNCERTAINTY ..... 5**

**3 GENERAL INFORMATION ..... 6**

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 7

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST ..... 8

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 8

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 10

3.4 DESCRIPTION OF SUPPORT UNITS..... 10

**4 TEST TYPES AND RESULTS.....11**

4.1 RADIATED EMISSION MEASUREMENT .....11

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 16

4.1.2 TEST INSTRUMENTS..... 17

4.1.3 TEST PROCEDURES ..... 18

4.1.4 DEVIATION FROM TEST STANDARD ..... 18

4.1.5 TEST SETUP ..... 19

4.1.6 EUT OPERATING CONDITIONS ..... 20

4.1.7 TEST RESULTS ..... 21

4.2 6dB BANDWIDTH MEASUREMENT ..... 26

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT ..... 26

4.2.2 TEST INSTRUMENTS..... 26

4.2.3 TEST PROCEDURE..... 27

4.2.4 DEVIATION FROM TEST STANDARD ..... 27

4.2.5 TEST SETUP ..... 27

4.2.6 EUT OPERATING CONDITIONS ..... 27

4.2.7 TEST RESULTS ..... 28

4.3 MAXIMUM OUTPUT POWER..... 29

4.3.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT ..... 29

4.3.2 TEST SETUP ..... 29

4.3.3 TEST INSTRUMENTS..... 29

4.3.4 TEST PROCEDURES ..... 30

4.3.5 DEVIATION FROM TEST STANDARD ..... 30

4.3.6 EUT OPERATING CONDITIONS ..... 30



4.3.7	TEST RESULTS .....	31
4.4	POWER SPECTRAL DENSITY MEASUREMENT .....	32
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	32
4.4.2	TEST SETUP .....	32
4.4.3	TEST INSTRUMENTS.....	32
4.4.4	TEST PROCEDURE.....	33
4.4.5	DEVIATION FROM TEST STANDARD .....	33
4.4.6	EUT OPERATING CONDITION .....	33
4.4.7	TEST RESULTS .....	34
4.5	OUT OF BAND EMISSION MEASUREMENT .....	35
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	35
4.5.2	TEST SETUP .....	35
4.5.3	TEST INSTRUMENTS.....	35
4.5.4	TEST PROCEDURE.....	35
4.5.5	DEVIATION FROM TEST STANDARD .....	36
4.5.6	EUT OPERATING CONDITION .....	36
4.5.7	TEST RESULTS .....	37
4.6	OCCUPIED BANDWIDTH MEASUREMENT.....	39
4.6.1	TEST INSTRUMENTS.....	39
4.6.2	TEST PROCEDURE.....	39
4.6.3	DEVIATION FROM TEST STANDARD .....	40
4.6.4	TEST SETUP .....	40
4.6.5	EUT OPERATING CONDITIONS .....	40
4.6.6	TEST RESULTS .....	41
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>42</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>43</b>



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
IC180920N037-1	Original release	Nov. 16, 2018
IC2011WDG0364-1	Based on the original report IC180920N037-1 updated standard, changed the brand name and added additional model.	Jan. 12, 2021

Note: After the verification of worst case of AC Power Conducted Emission and Transmitter Radiated Emissions, all test data can be referred to the original report and showed in this report



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: RSS-247; RSS-Gen			
Standard	Test Type and Limit	Result	Remark
RSS-Gen			
RSS-Gen 8.8	AC Power Conducted Emission	PASS	Meet the requirement of limit
RSS-Gen 6.7	Occupied Bandwidth Measurement	PASS	Meet the requirement of limit
8.10 Table 7	Restricted Band of Operation	PASS	Meet the requirement of limit
8.9 Table 5	Transmitter Radiated Emissions	PASS	Meet the requirement of limit.
Standard	Test Type and Limit	Result	Remark
RSS-247			
5.2(a)	6db Bandwidth Measurement	PASS	Meet the requirement of limit
5.2(b)	Power Spectral Density Measurement	PASS	Meet the requirement of limit.
5.4(d)	Maximum Output Power	PASS	Meet the requirement of limit.
5.5	Out of band Emission Measurement	PASS	Meet the requirement of limit.

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.76dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.96dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Boron LTE
<b>MODEL NO.</b>	BRN402
<b>ADDITIONAL MODEL</b>	BRN404
<b>IC</b>	20127-BRN402
<b>NOMINAL VOLTAGE</b>	Li+ PIN: DC 3.7V from Li-ion Battery or VUSB: DC 5V From USB Host Unit
<b>MODULATION TYPE</b>	DSSS
<b>MODULATION TECHNOLOGY</b>	OQPSK for 802.15.4
<b>OPERATING FREQUENCY</b>	2405-2480MHz
<b>PEAK OUTPUT POWER</b>	0.61dBm(Maximum)
<b>ANTENNA TYPE</b>	FPCB Antenna, with 0dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A
<b>PRODUCT SW/HW</b>	V0.8.0/V1.0
<b>RADIO SW/HW</b>	V0.8.0/V1.0
<b>TEST SW VERSION</b>	V1.0
<b>RF POWER SETTING IN TEST SW</b>	V1.0

**NOTE:**

1. The EUT provides completed transmitters and receivers:

MODULATION MODE	FUNCTION
DSSS	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 2011WDG0364) for detailed product photo.
5. The EUT is wireless module, it no any accessories.
6. Additional model BRN404 is identical with the test model BRN402 except the model name for trading purpose.



### 3.2 DESCRIPTION OF TEST MODES

16 channels are provided

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
11	2405 MHz	19	2445 MHz
12	2410 MHz	20	2450 MHz
13	2415 MHz	21	2455 MHz
14	2420 MHz	22	2460 MHz
15	2425 MHz	23	2465 MHz
16	2430 MHz	24	2470 MHz
17	2435 MHz	25	2475 MHz
18	2440 MHz	26	2480 MHz



### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 3.2.2 Test Mode Applicability and tested channel detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
<b>A</b>	√	√	-	√	Powered by Fully Battery
<b>B</b>	-	-	√	-	Powered by Adapter

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
<b>B</b>	(2.4G) Link

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Kbps)
<b>A</b>	11 to 26	11	DSSS	OQPSK	250

For the test results, only the worst case was shown in test report.





**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Kbps)
A	11 to 26	11,18, 26	DSSS	OQPSK	250

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Kbps)
A	11 to 26	11,18, 26	DSSS	OQPSK	250

**ANTENNA PORT CONDUCTED MEASUREMENT:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Kbps)
A	11 to 26	11,18, 26	DSSS	OQPSK	250

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 53%RH	DC3.7V from Fully Battery	Xue Wang
RE≥1G	25deg. C, 53%RH	DC3.7V from Fully Battery	Xue Wang
PLC	20deg. C, 56%RH	DC 5V from Adapter	Sen He
APCM	25deg. C, 60%RH	DC3.7V from Fully Battery	Robert Cheng



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Canada RSS-247 Issue 2 (2017-02)**

**Canada RSS-Gen Issue 5 (2019-03)**

ANSI C63.10-2013

558074 D01 DTS Meas Guidance v04

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	Li-ion Battery	N/A	DC3.7V	N/A	N/A
3	Adapter	N/A	DC5V 1.5A	N/A	N/A
4	Mobile phone	Apple	ML7F2CH/A	C6KQKXLAGRY8	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	N/A
3	USB Line: Unshielded, Detachable 0.6m
4	N/A

**NOTE:** All power cords of the above support units are non-shielded (1.8m).



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 21,18	Mar. 20,19
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 03,18	Mar. 02,19
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 11,18	Apr. 10,19
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,18	Jan. 16,19
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

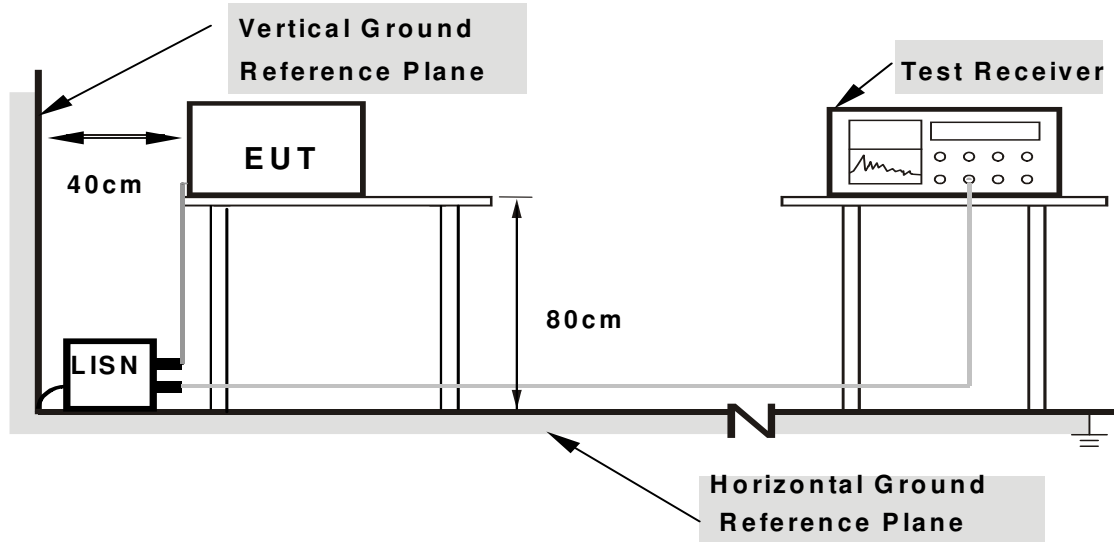

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

#### CONDUCTED WORST-CASE DATA:

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.60893	10.36	2.61	-4.95	12.97	5.41	56.00	46.00	-43.03	-40.59
<b>2</b>	<b>0.80772</b>	<b>10.45</b>	<b>10.10</b>	<b>-1.93</b>	<b>20.55</b>	<b>8.52</b>	<b>56.00</b>	<b>46.00</b>	<b>-35.45</b>	<b>-37.48</b>
3	1.09139	10.23	0.54	-5.48	10.77	4.75	56.00	46.00	-45.23	-41.25
4	2.91750	9.69	1.34	-4.87	11.03	4.82	56.00	46.00	-44.97	-41.18
5	4.15950	9.90	4.31	-3.96	14.21	5.94	56.00	46.00	-41.79	-40.06
6	16.95975	9.94	1.28	-3.91	11.22	6.03	60.00	50.00	-48.78	-43.97

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

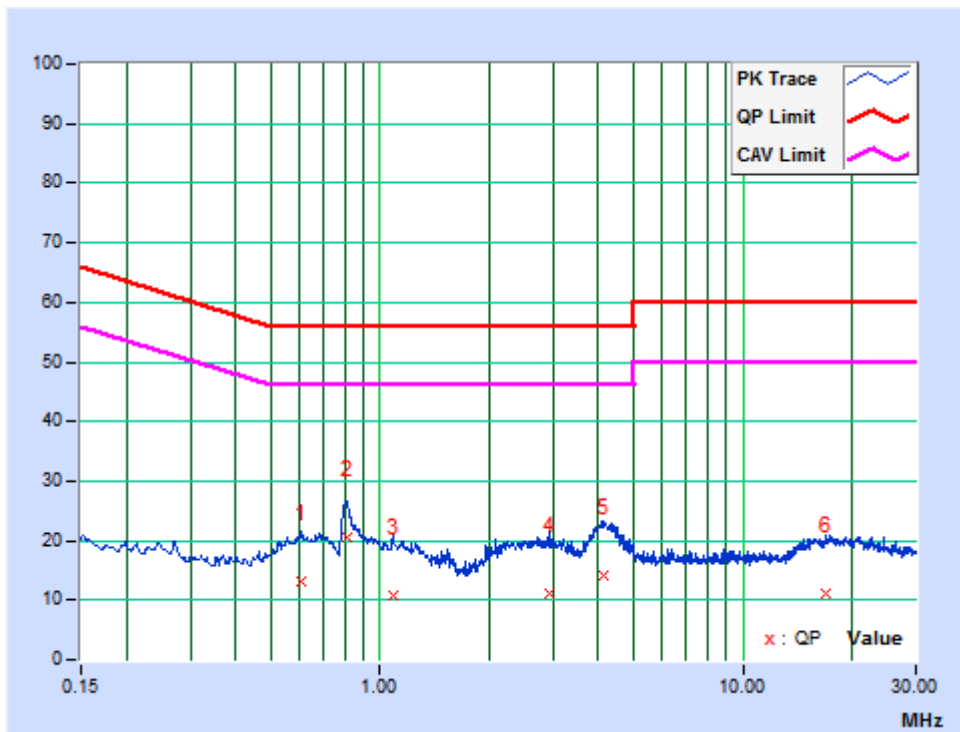




PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17933	10.16	-1.92	-4.63	8.24	5.53	64.52	54.52	-56.28	-48.99
2	0.79713	9.95	6.18	-3.52	16.13	6.43	56.00	46.00	-39.87	-39.57
3	1.31100	9.75	-3.52	-6.54	6.23	3.21	56.00	46.00	-49.77	-42.79
4	3.19650	10.11	-1.04	-5.17	9.07	4.94	56.00	46.00	-46.93	-41.06
5	4.06500	9.69	2.75	-4.14	12.44	5.55	56.00	46.00	-43.56	-40.45
6	15.76950	9.81	3.63	-2.59	13.44	7.22	60.00	50.00	-46.56	-42.78

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

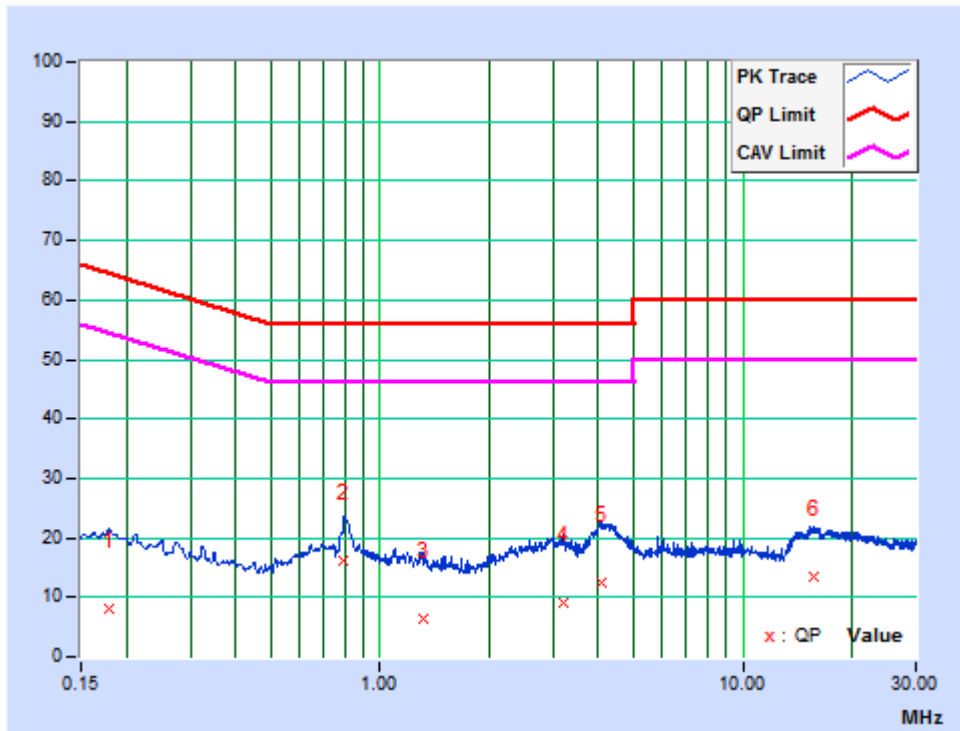



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in RSS-Gen Section 8.10, must also comply with the radiated emission limits specified in RSS-Gen Section 8.9. as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).



**4.2.2 TEST INSTRUMENTS**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 21,18	Mar. 20,19
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Active Loop Antenna (9KHz -30MHz)	SCHWARZBEC K	FMZB 1519B	1519B-045	May 04,18	May 03,19
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 18,18	Apr. 18,19
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Aug. 11, 18	Aug. 10, 19
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 18	Jul. 20, 19
Horn Antenna (18GHz -40GHz)	SCHWARZBEC K	BBHA 9170	BBHA9170242	May 05,18	May 04,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Feb. 10,18	Feb. 09,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBEC K	BBV9718	305	Apr. 18,18	Apr. 18,19
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 08,18	Nov. 07,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul. 06, 18	Jul. 05, 19

**NOTE:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The IC test Site Registration No. is 5936A-1.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.


#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




### 4.2.5 TEST SETUP

#### Below 30MHz

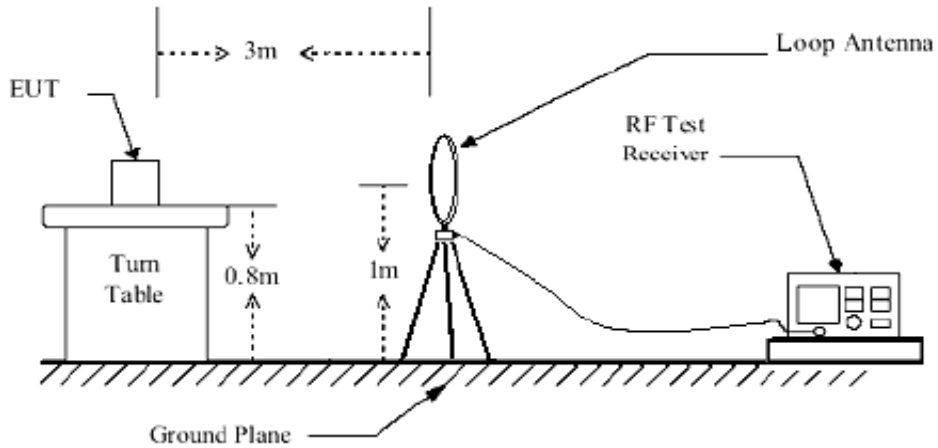


#### Below 1GHz test setup

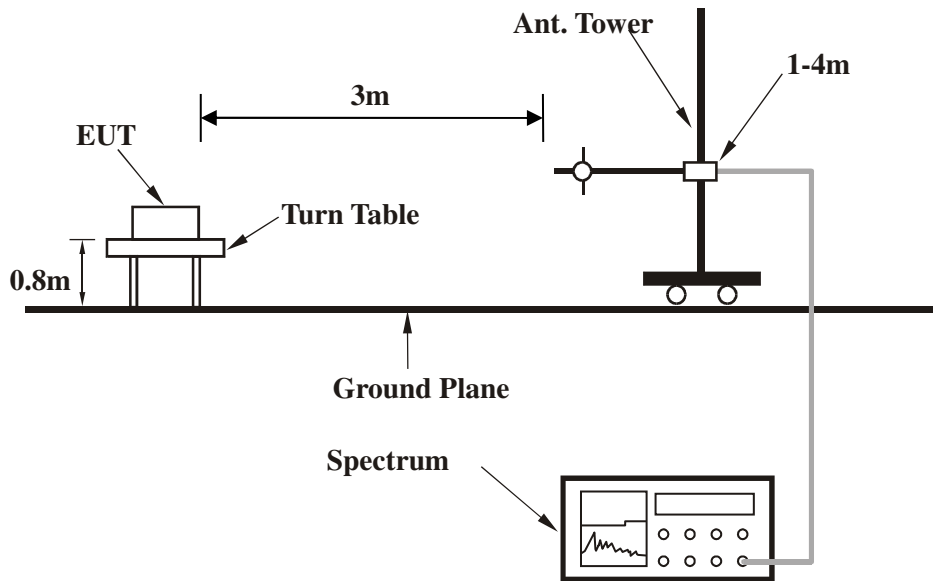

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



## Above 1GHz test setup

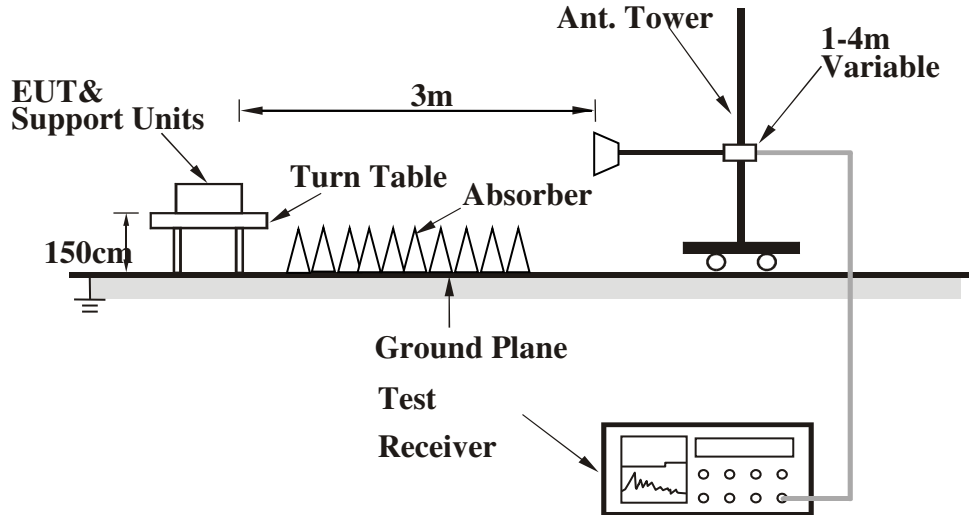

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT OPERATING CONDITIONS

- Set the EUT placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



**4.2.7 TEST RESULTS**


**BELOW 1GHz WORST-CASE DATA:**

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	31.55	35.26 QP	40.00	-4.74	1.25 H	360	46.30	-11.04
2	126.38	36.12 QP	43.50	-7.38	2.00 H	0	52.45	-16.33
3	277.16	40.94 QP	46.00	-5.06	2.00 H	359	54.77	-13.83
<b>4</b>	<b>330.02</b>	<b>42.31 QP</b>	<b>46.00</b>	<b>-3.69</b>	<b>2.00 H</b>	<b>310</b>	<b>53.75</b>	<b>-11.44</b>
5	392.20	42.31 QP	46.00	-3.69	2.00 H	296	51.81	-9.50
6	452.82	40.03 QP	46.00	-5.97	2.00 H	156	48.51	-8.48

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

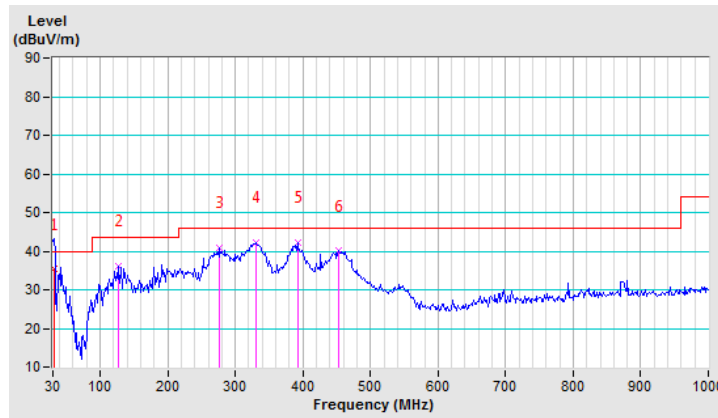




<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
<b>NO.</b>	<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA HEIGHT (m)</b>	<b>TABLE ANGLE (Degree)</b>	<b>RAW VALUE (dBuV)</b>	<b>CORRECTION FACTOR (dB/m)</b>
1	37.77	34.58 QP	40.00	-5.42	1.00 V	125	49.25	-14.67
2	155.91	39.02 QP	43.50	-4.48	1.00 V	230	55.39	-16.37
3	191.67	38.12 QP	43.50	-5.38	1.00 V	201	56.02	-17.91
4	323.80	36.70 QP	46.00	-9.30	1.00 V	85	48.37	-11.67
5	390.64	38.10 QP	46.00	-7.90	1.00 V	144	47.65	-9.55
6	530.54	36.45 QP	46.00	-9.55	1.00 V	167	43.04	-6.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

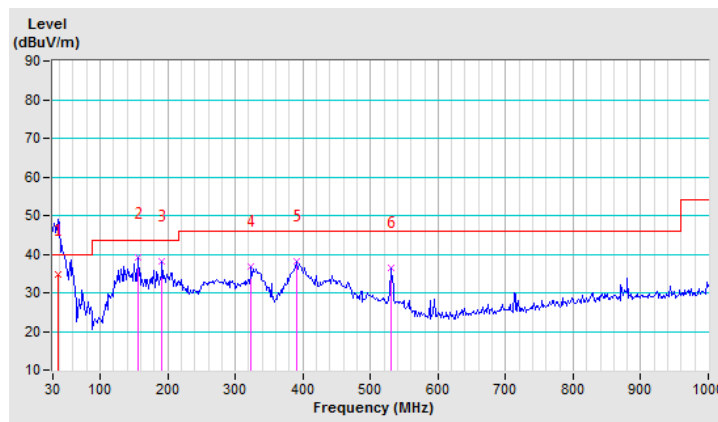



ABOVE 1GHz DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.16 PK	74.00	-30.84	1.17 H	131	41.11	2.05
2	2390.00	20.66 AV	54.00	-33.34	1.17 H	131	18.61	2.05
3	*2405.00	84.10 PK			1.17 H	131	81.94	2.16
4	*2405.00	61.60 AV			1.17 H	131	59.44	2.16
5	4810.00	44.56 PK	74.00	-29.44	1.53 H	67	39.73	4.83
6	4810.00	22.06 AV	54.00	-31.94	1.53 H	67	17.23	4.83
7	#7215.00	49.19 PK	74.00	-24.81	1.53 H	67	40.55	8.64
8	#7215.00	26.69 AV	54.00	-27.31	1.53 H	67	18.05	8.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.80 PK	74.00	-31.20	1.79 V	196	40.75	2.05
2	2390.00	20.30 AV	54.00	-33.70	1.79 V	196	18.25	2.05
3	*2405.00	85.38 PK			1.33 V	196	83.22	2.16
4	*2405.00	62.88 AV			1.33 V	196	60.72	2.16
5	4810.00	46.01 PK	74.00	-27.99	1.24 V	95	41.18	4.83
6	4810.00	23.51 AV	54.00	-30.49	1.24 V	95	18.68	4.83
7	#7215.00	50.12 PK	74.00	-23.88	1.47 V	69	41.48	8.64
8	#7215.00	27.62 AV	54.00	-26.38	1.47 V	69	18.98	8.64

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2450.00	82.07 PK			1.15 H	66	79.59	2.48
2	*2450.00	59.57 AV			1.15 H	66	57.09	2.48
3	4900.00	45.32 PK	74.00	-28.68	1.51 H	24	40.29	5.03
4	4900.00	22.82 AV	54.00	-31.18	1.51 H	24	17.79	5.03
5	7350.00	50.11 PK	74.00	-23.89	1.17 H	97	41.31	8.80
6	7350.00	27.61 AV	54.00	-26.39	1.17 H	97	18.81	8.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2450.00	83.32 PK			1.15 V	197	80.84	2.48
2	*2450.00	60.82 AV			1.15 V	197	58.34	2.48
3	4900.00	47.53 PK	74.00	-26.47	1.47 V	69	42.50	5.03
4	4900.00	25.03 AV	54.00	-28.97	1.47 V	69	20.00	5.03
5	7350.00	51.33 PK	74.00	-22.67	1.66 V	100	42.53	8.80
6	7350.00	28.83 AV	54.00	-25.17	1.66 V	100	20.03	8.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





<b>CHANNEL</b>	TX Channel 26	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	82.37 PK			1.00 H	127	79.69	2.68
2	*2480.00	59.87 AV			1.00 H	127	57.19	2.68
3	2483.50	42.74 PK	74.00	-31.26	1.00 H	127	40.04	2.70
4	2483.50	20.24 AV	54.00	-33.76	1.00 H	127	17.54	2.70
5	4960.00	45.79 PK	74.00	-28.21	1.15 H	64	40.62	5.17
6	4960.00	23.29 AV	54.00	-30.71	1.15 H	64	18.12	5.17
7	7440.00	49.92 PK	74.00	-24.08	1.79 H	68	41.02	8.90
8	7440.00	27.42 AV	54.00	-26.58	1.79 H	68	18.52	8.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	80.29 PK			1.00 V	69	77.61	2.68
2	*2480.00	57.79 AV			1.00 V	69	55.11	2.68
3	2483.50	42.90 PK	74.00	-31.10	1.17 V	69	40.20	2.70
4	2483.50	20.40 AV	54.00	-33.60	1.17 V	69	17.70	2.70
5	4960.00	45.47 PK	74.00	-28.53	1.31 V	167	40.30	5.17
6	4960.00	22.97 AV	54.00	-31.03	1.31 V	167	17.80	5.17
7	7440.00	50.05 PK	74.00	-23.95	1.10 V	0	41.15	8.90
8	7440.00	27.55 AV	54.00	-26.45	1.10 V	0	18.65	8.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 18	Oct.20, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,18	Sep. 04,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,18	Nov. 07,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 18	Aug.31, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul.06, 18	Jul. 05, 19
Attenuator	MINI	BW-S10W2 +	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.3.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP




#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
11	2405	1.05	0.5	PASS
18	2440	1.45	0.5	PASS
26	2480	1.19	0.5	PASS

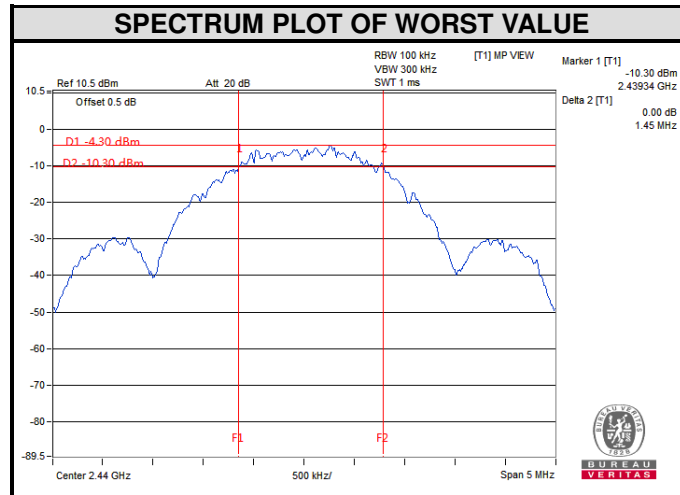




### 4.4 MAXIMUM OUTPUT POWER

#### 4.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W(30dBm). The e.i.r.p. shall not exceed 4 W(36dBm)

#### 4.4.2 TEST SETUP

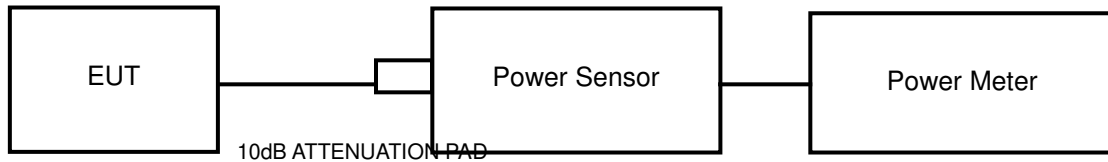

#### 4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 18	Oct.20, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,18	Sep. 04,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,18	Nov. 07,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 18	Aug.31, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul.06, 18	Jul. 05, 19
Attenuator	MINI	BW-S10W2 +	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.4.7 TEST RESULTS

##### MAXIMUM OUTPUT POWER

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	EIRP (mW)	PEAK POWER LIMIT (W)	EIRP LIMIT (W)	PASS/FAIL
11	2405	0.61	1.1510	1.1510	1	4	PASS
18	2440	0.32	1.0760	1.0760	1	4	PASS
26	2480	-0.17	0.9616	0.9616	1	4	PASS

##### AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

CHANNEL	CHANNEL FREQUENCY(MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
11	2405	-1.10	0.7762
18	2440	-1.41	0.7228
26	2480	-1.80	0.6607




### 4.5 POWER SPECTRAL DENSITY MEASUREMENT

#### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

#### 4.5.2 TEST SETUP



#### 4.5.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 18	Oct.20, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,18	Sep. 04,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,18	Nov. 07,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 18	Aug.31, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul.06, 18	Jul. 05, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.





#### 4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to 1.5 times the DTS bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

#### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


#### 4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.5.7 TEST RESULTS

Channel		FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
11		2405	-12.69	8.00	PASS
18		2440	-13.15	8.00	PASS
26		2480	-13.58	8.00	PASS

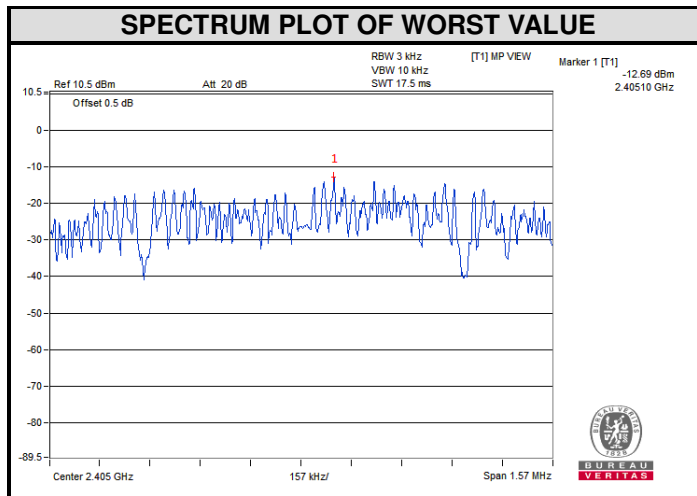




## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

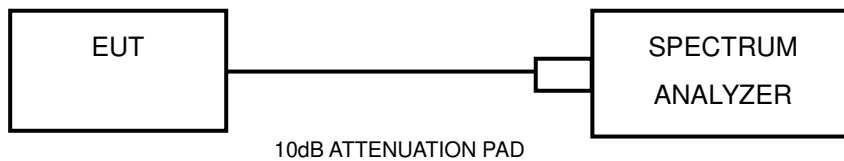

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## **MEASUREMENT PROCEDURE OOB**

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS

Test Report No.: IC2011WDG0364-1


### 4.6.7 TEST RESULTS

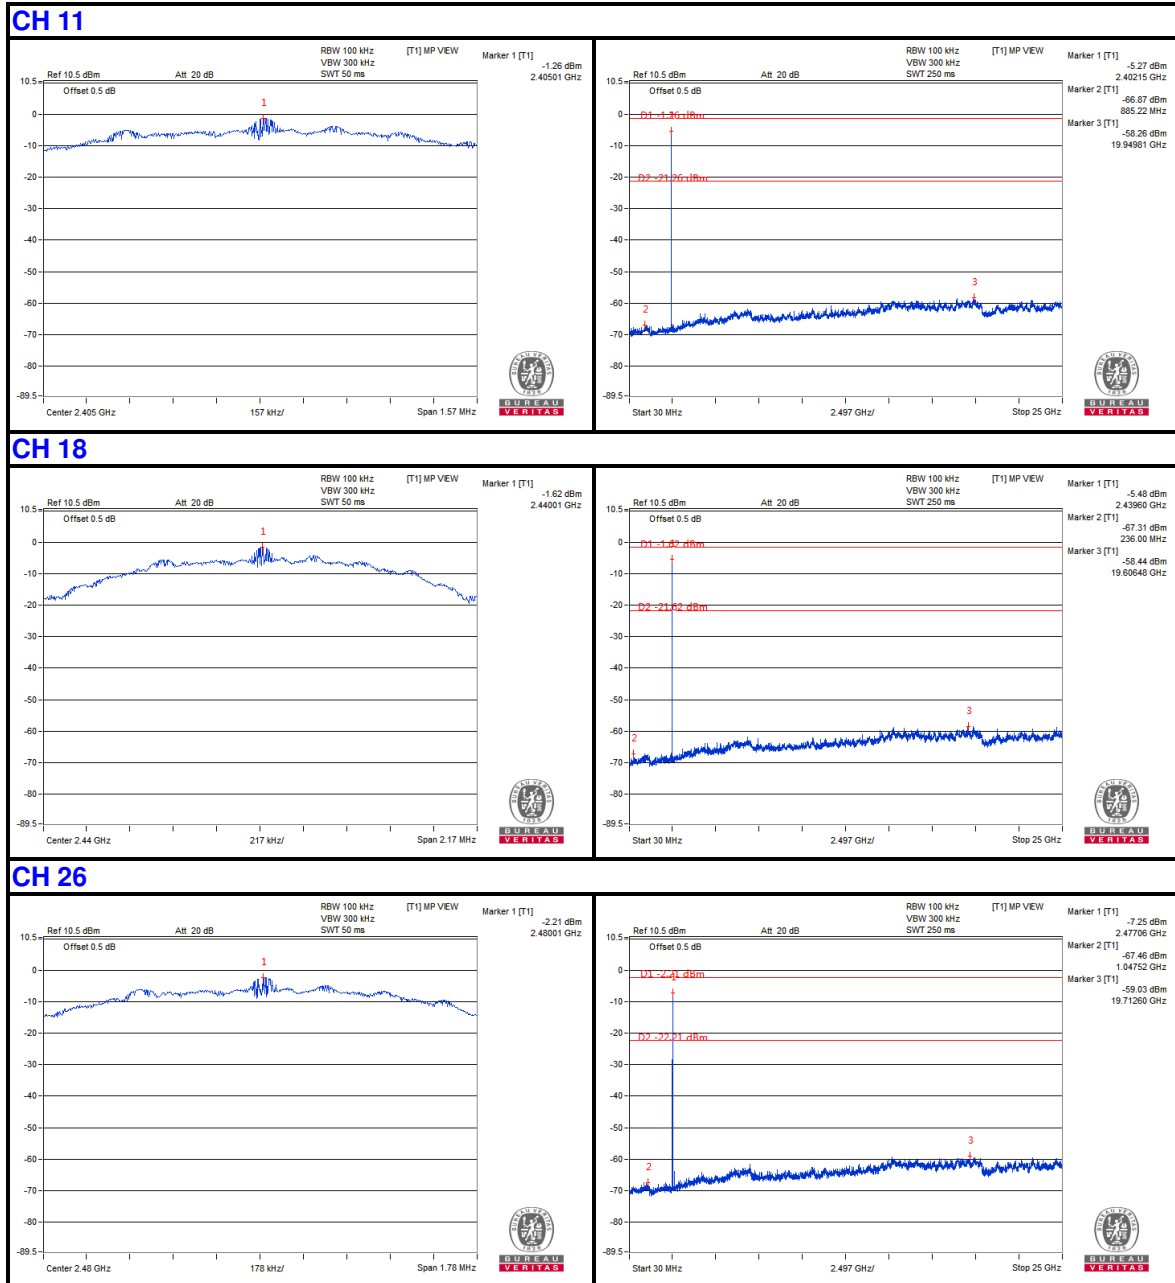



BUREAU VERITAS

Test Report No.: IC2011WDG0364-1

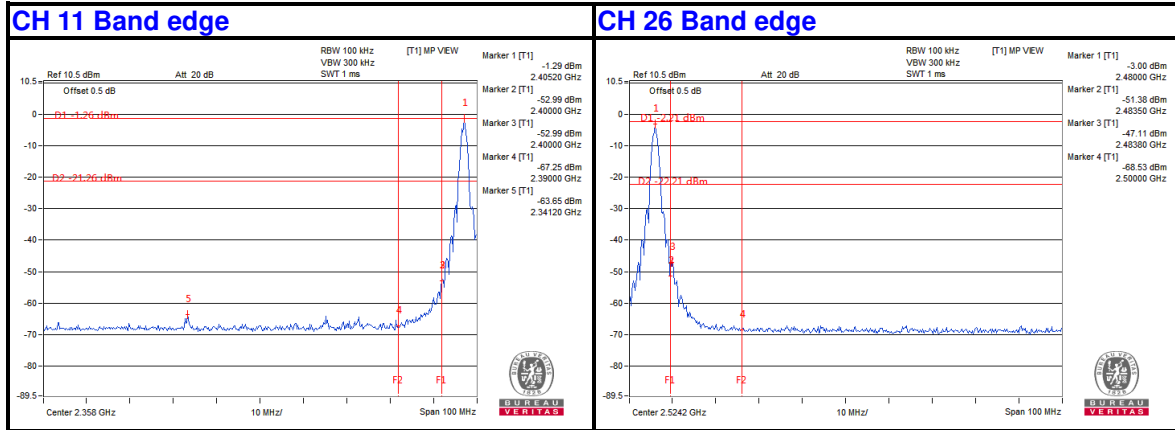

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



### 4.7 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.7.1 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Jun. 13,18	Jun. 12,19
Power Sensor	Keysight	U2021XA	MY55060018	Jun. 13,18	Jun. 12,19
Power Meter	Anritsu	ML2495A	1139001	Apr. 13,18	Apr. 13,19
Power Sensor	Anritsu	MA2411B	1531155	Apr. 13,18	Apr. 13,19
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 21, 18	Oct.20, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,18	Sep. 04,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 08,18	Nov. 07,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,18	Nov. 03,19
Signal Generator	Agilent	N5183A	MY50140980	Jan. 02,18	Jan. 01,19
Agile Signal Generator	Agilent	8645A	Agilent	Sep.01, 18	Aug.31, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 21,18	Mar. 20,19
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jan. 02,18	Jan. 01,19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Jul.06, 18	Jul. 05, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.7.2 TEST PROCEDURE

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.


Below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.



#### 4.7.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.7.4 TEST SETUP



#### 4.7.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.





4.7.6 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)
11	2405	2.23
18	2440	2.23
26	2480	2.25

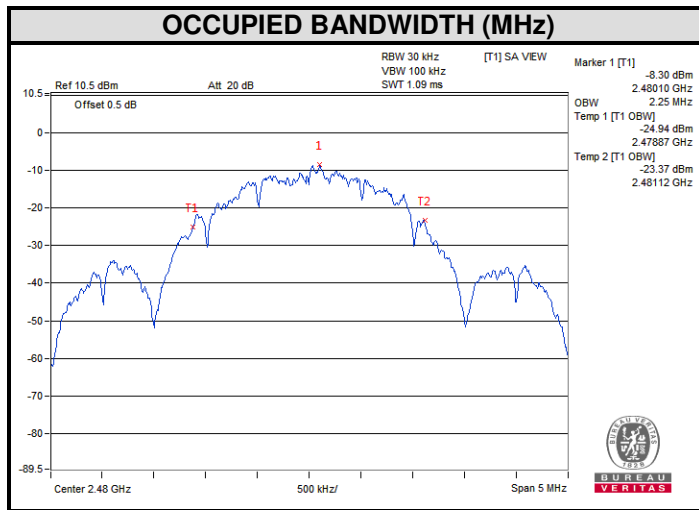



**BUREAU  
VERITAS**

Test Report No.: IC2011WDG0364-1

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: IC2011WDG0364-1

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**