

# FCC / ISED & Test Report

### For:

Particle Industries, Inc.

#### Model:

BRN404X BORON 404X with BQ24195L (PMIC)

## **Product Description:**

LTE Development Board with EtherSIM

## **Applied Rules and Standards:**

47 CFR Parts 22, 24, and 27 RSS: 132 Issue 3, 133 Issue 6, 139 Issue 4

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X

**REPORT #**: EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

**DATE:** 2023-03-24



**A2LA Accredited** 

IC recognized # 3462B-1

#### CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: contact@cetecom.com • <a href="http://www.cetecom.com">http://www.cetecom.com</a> CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

V4.0 2012-07-25 © Copyright by CETECOM



## TABLE OF CONTENTS

| 1  | A                               | ASSESSMENT   | 3      |
|----|---------------------------------|--|--------|
| 2  | A                               | ADMINISTRATIVE DATA  | 4      |
|    | 2.1<br>2.2<br>2.3               | IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT   | 4      |
| 3  | Е                               | EQUIPMENT UNDER TEST (EUT)   | 5      |
|    | 3.1<br>3.2<br>3.3<br>3.4<br>3.5 | EUT SPECIFICATIONS  EUT SAMPLE DETAILS  ACCESSORY EQUIPMENT (AE) DETAILS  TEST SAMPLE CONFIGURATION  MODE OF OPERATION | 6<br>6 |
| 4  | S                               | SUBJECT OF INVESTIGATION   | 7      |
|    | 4.1<br>4.2<br>4.3               | Dates of Testing:  | 7      |
| 5  | N                               | MEASUREMENT PROCEDURES   | 8      |
|    | 5.1<br>5.2                      | RADIATED MEASUREMENTSAMPLE CALCULATIONS FOR FIELD STRENGTH MEASUREMENTS  |        |
| 6  | N                               | MEASUREMENT RESULTS SUMMARY  | 11     |
|    | 6.1<br>6.2<br>6.3               | PART 22 / RSS-132<br>PART 24 / RSS-133<br>FCC 27 / RSS-139   | 11     |
| 7  | R                               | REFERENCE  | 13     |
|    | 7.1<br>7.2                      | CROSS REFERENCE SUMMARY POWER VERIFICATION   | _      |
| 8  | Т                               | TEST RESULT DATA   | 15     |
|    | 8.1                             | RADIATED SPURIOUS EMISSIONS  | 15     |
| 9  | Т                               | TEST SETUP PHOTOS  | 62     |
| 10 | Т                               | TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING  | 62     |
| 11 | R                               | REVISION HISTORY   | 63     |

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 3 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



#### 1 Assessment

The following device as further described in section 3 of this report was evaluated against the applicable criteria specified in the Code of Federal Regulations Title 47 parts 22, 24 and 27, and Industry Canada Standards RSS-GEN issue 3, RSS-132 issue 3, RSS-133 issue 6, and RSS-139 issue 4.

No deficiencies were ascertained.

| Company Name              | Product Description                 | Model   |
|---------------------------|-------------------------------------|---|
| Particle Industries, Inc. | LTE Development Board with EtherSIM | BRN404X<br>BORON 404X with<br>BQ24195L (PMIC) |

### **Responsible for Testing Laboratory:**

#### Arndt Stoecker

| 2023-03-24 | Compliance | (Director of Regulatory Services) |           |
|------------|------------|-----------------------------------|-----------|
| Date       | Section    | Name                              | Signature |

#### **Responsible for the Report:**

| $\sim$ | hana | Cana |
|--------|------|------|
|        | neng | Song |

| 2023-03-24 | Compliance | (EMC Engineer) |           |
|------------|------------|----------------|-----------|
| Date       | Section    | Name           | Signature |

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



## 2 Administrative Data

## 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

| Company Name:               | CETECOM Inc.           |
|-----------------------------|------------------------|
| Department:                 | Compliance             |
| Street Address:             | 411 Dixon Landing Road |
| City/Zip Code               | Milpitas, CA 95035     |
| Country                     | USA                    |
| Telephone:                  | +1 (408) 586 6200      |
| Fax:                        | +1 (408) 586 6299      |
| EMC Lab Manager:            | Arndt Stoecker         |
| Responsible Project Leader: | Phillip Quintal        |

## 2.2 Identification of the Client

| Client's Name:  | Particle Industries, Inc. |
|-----------------|---------------------------|
| Street Address: | 325 9th St                |
| City/Zip Code   | San Francisco, CA 94103   |
| Country         | USA                       |

## 2.3 Identification of the Manufacturer

| Manufacturer's Name:   |                 |
|------------------------|-----------------|
| Manufacturers Address: | Same as Client  |
| City/Zip Code          | ourie as olient |
| Country                |                 |

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 5 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



## 3 Equipment Under Test (EUT)

## 3.1 EUT Specifications

| Model No  | Model No BRN404X, BORON 404X with BQ24195L (PMIC)  |  |  |
|---|--|--|--|
| HW Version  | V1.5.0   |  |  |
| SW Version  | V4.0.0   |  |  |
| FCC-ID  | 2AEMI-BRN404X  |  |  |
| IC:   | 20127-BRN404X  |  |  |
| PMN:  | Boron  |  |  |
| Product Description   | LTE Development Board with EtherSIM  |  |  |
| Radio Information:  | <ul> <li>Cellular:         <ul> <li>u-blox SARA-R510S</li> <li>FCC ID: XPYUBX19KM01; IC: 8595A-UBX19KM01</li> </ul> </li> <li>Bluetooth:         <ul> <li>Nordic Semiconductor nRF52840 SoC</li> <li>Bluetooth 5 LE</li> </ul> </li> </ul> |  |  |
| Antenna Information:  | <ul> <li>Cellular:         <ul> <li>G142-10006-A antenna</li> <li>Wide band FPC antenna: 3.86dBi max gain</li> </ul> </li> <li>Bluetooth:         <ul> <li>PCB antenna: 2dBi max gain</li> </ul> </li> </ul>                               |  |  |
| Power Supply/ Rated DC 5V from Host Unit or DC 3.7V from Li-ion battery |  |  |  |
| Operating Voltage Range Operating Temperature Range                     | Wmin = 3.4V, Vmax = 4.4V, Vnom = 3.7V Tmin: -20 °C / Tmax: 60 °C / Tnom: 25 °C   |  |  |
| Sample Revision   | □Prototype □Production ■Pre-Production   |  |  |

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 Page 6 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



#### 3.2 **EUT Sample details**

| EUT# | Model Number | HW Version | SW Version | Comments |
|------|--------------|------------|------------|----------|
| 1    | BRN404X      | V1.5.0     | V4.0.0     |          |

#### 3.3 Accessory Equipment (AE) details

2023-03-24

| AE# | Туре | Model | Manufacturer | Serial Number |
|-----|------|-------|--------------|---------------|
| 1   |      |       |              |               |

#### **Test Sample Configuration** 3.4

| Set-up# | EUT / AE used for set-up | Comments           |
|---------|--------------------------|--------------------|
| 1       | EUT#1                    | Radiated Emissions |

#### 3.5 **Mode of Operation**

| Operating Mode | Note           | Comments  |
|----------------|----------------|---|
| Op. 1          | Cellular + BLE | During the testing process, the EUT was tested with Cellular sets on low, mid and high channels, and highest possible duty cycle. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.  Cellular transmits simultaneously with BLE. |

2023-03-24

FCC ID: 2AEMI-BRN404X

IC: 20127-BRN404X



4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to evaluate the compliance of the EUT against the relevant requirements specified in the Code of Federal Regulations Title 47 parts 22, 24, 27 and ISED Standards RSS-132 issue 3, RSS-133 issue 6, and RSS-139 issue 4.

Page 7 of 63

### 4.1 Dates of Testing:

09/03/2022 - 09/08/2022

### 4.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=2.

| Measurement System               | EMC 1   | EMC 2   |
|----------------------------------|---------|---------|
| Conducted Emissions (mains port) | 1.12 dB | 0.46 dB |
| Radiated Emissions               |         |         |
| (<30 MHz)                        | 3.66 dB | 3.88 dB |
| (30 MHz – 1 GHz)                 | 3.17 dB | 3.34 dB |
| (1 GHz – 3 GHz)                  | 5.01 dB | 4.45 dB |
| (> 3 GHz)                        | 4.0 dB  | 4.79 dB |

### 4.3 Environmental Conditions during Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%


Deviating test conditions are indicated at individual test description where applicable.

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



#### 5 Measurement Procedures

Testing is performed according to the guidelines provided in FCC publication (KDB) 971168 D01 v03r01 – "Measurement Guidance for Certification of Licensed Digital Transmitters" and according to relevant parts of ANSI/TIA-603-D-2010 as detailed below.

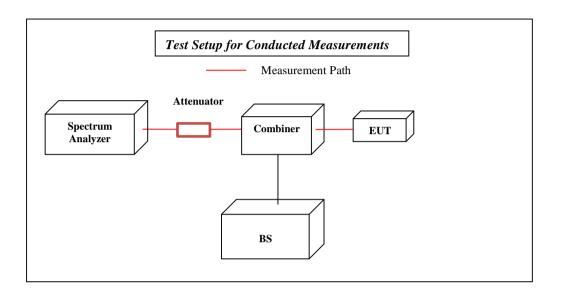


#### 5.1 Radiated Measurement

- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.


FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



### Radiated Emissions Test Setup below 30MHz Measurements

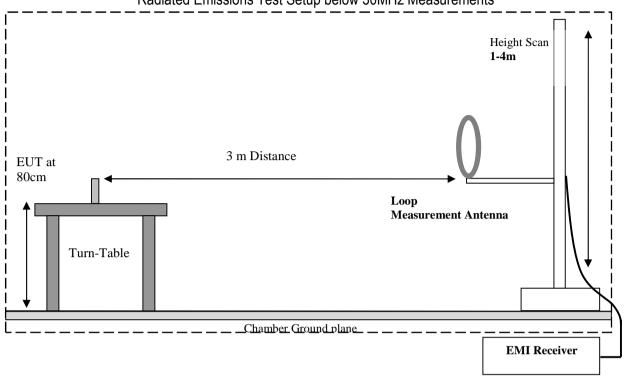


## Radiated Emissions Test Setup 30MHz-1GHz Measurements

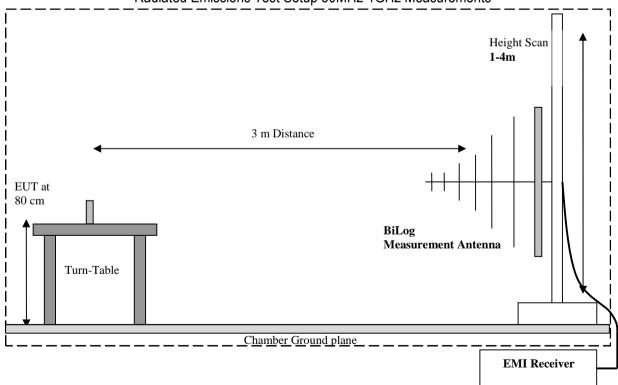



Radiated Emissions Test Setup above 1GHz Measurements

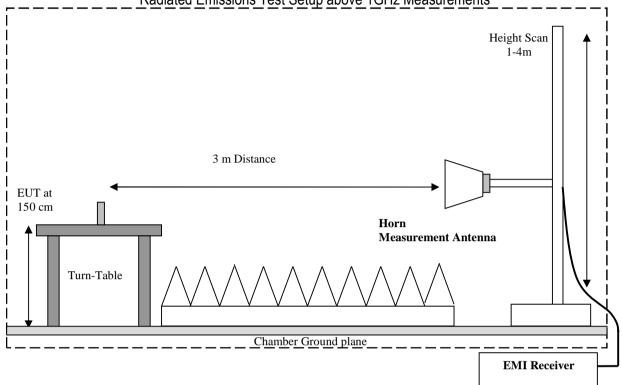

#### 5.2 **Sample Calculations for Field Strength Measurements**

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

- Measured reading in dBµV
- Cable Loss between the receiving antenna and SA in dB and
- Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

FS (dBµV/m) = Measured Value on SA (dBµV)+ Cable Loss (dB)+ Antenna Factor (dB/m)

### Example:

| Frequency | Measured SA | Cable Loss | Antenna Factor Correction (dB) | Field Strength Result |
|-----------|-------------|------------|--------------------------------|-----------------------|
| (MHz)     | (dBµV)      | (dB)       |                                | (dBµV/m)              |
| 1000      | 80.5        | 3.5        | 14                             | 98.0                  |

FCC ID: 2AEMI-BRN404X

Date of Report

2023-03-24 Page 11 of 63

IC: 20127-BRN404X



### 6 Measurement Results Summary

#### 6.1 Part 22 / RSS-132

| Test Specification   | Test Case                       | Temperature and<br>Voltage Conditions | Mode  | Pass | Fail | NA | NP | Result   |
|----------------------|---------------------------------|---------------------------------------|-------|------|------|----|----|----------|
| §2.1046; §22.913 (a) | RF Output Power                 | Nominal                               |       |      |      |    | •  | Note 3   |
| §2.1055; §22.355     | Frequency Stability             | Extreme Temperature and Voltage       |       |      |      |    |    | Note 4   |
| §2.1049; §22.917     | Occupied Bandwidth              | Nominal                               |       |      |      |    | •  | Note 5   |
| §2.1051; §22.917     | Band Edge<br>Compliance         | Nominal                               |       |      |      |    |    | Note 6   |
| §2.1051; §22.917     | Conducted Spurious<br>Emissions | Nominal                               |       |      |      |    |    | Note 2   |
| §2.1053; §22.917     | Radiated Spurious<br>Emissions  | Nominal                               | Op. 1 |      |      |    |    | Complies |

Note 1: NA= Not Applicable; NP= Not Performed.

#### 6.2 Part 24 / RSS-133

| Test Specification   | Test Case                       | Temperature and Voltage Conditions | Mode  | Pass | Fail | NA | NP | Result   |
|----------------------|---------------------------------|------------------------------------|-------|------|------|----|----|----------|
| §2.1046; §24.232 (a) | RF Output Power                 | Nominal                            |       |      |      |    | •  | Note 3   |
| §2.1055; §24.235     | Frequency Stability             | Extreme Temperature and Voltage    |       |      |      |    |    | Note 4   |
| §2.1049; §24.238     | Occupied Bandwidth              | Nominal                            |       |      |      |    | •  | Note 5   |
| §2.1051; §24.238     | Band Edge<br>Compliance         | Nominal                            |       |      |      |    |    | Note 6   |
| §2.1051; §24.238     | Conducted Spurious<br>Emissions | Nominal                            |       |      |      |    | •  | Note 2   |
| §2.1053; §24.238     | Radiated Spurious<br>Emissions  | Nominal                            | Op. 1 |      |      |    |    | Complies |

Note 1: NA= Not Applicable; NP= Not Performed.

Note 2: Spurious emissions were evaluated with radiated measurement.

Note 3: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.1.3 (FCC ID: XPYUBX19KM01)

Note 4: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.2.3 (FCC ID: XPYUBX19KM01)

Note 5: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.5.3 (FCC ID: XPYUBX19KM01)

Note 6: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.6.3 (FCC ID: XPYUBX19KM01)

Note 7: Spot check was performed on the worst case of the leveraged result. Lab takes full responsibility for data leveraging.

Note 2: Spurious emissions were evaluated with radiated measurement.

Note 3: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.8.3 (FCC ID: XPYUBX19KM01)

Note 4: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.9.3 (FCC ID: XPYUBX19KM01)

Note 5: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.12.3 (FCC ID: XPYUBX19KM01)

Note 6: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.13.3 (FCC ID: XPYUBX19KM01)

Note 7: Spot check was performed on the worst case of the leveraged result. Lab takes full responsibility for data leveraging.

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

PFCC ID: 2AEMI-BRN404X IC: 20127-BRN404X

**⊘** celecom

Date of Report

2023-03-24

Page 12 of 63

#### 6.3 FCC 27 / RSS-139

| Test Specification | Test Case                       | Temperature and Voltage Conditions | Mode  | Pass | Fail | NA | NP | Result   |
|--------------------|---------------------------------|------------------------------------|-------|------|------|----|----|----------|
| §2.1046; §27.50    | RF Output Power                 | Nominal                            |       |      |      |    |    | Note 3   |
| §2.1055; §27.54    | Frequency Stability             | Extreme Temperature and Voltage    |       |      |      |    |    | Note 4   |
| §2.1049; §27.53    | Occupied Bandwidth              | Nominal                            |       |      |      |    | •  | Note 5   |
| §2.1051; §27.53    | Band Edge<br>Compliance         | Nominal                            |       |      |      |    |    | Note 6   |
| §2.1051; §27.53    | Conducted Spurious<br>Emissions | Nominal                            |       |      |      |    |    | Note 2   |
| §2.1053; §27.53    | Radiated Spurious<br>Emissions  | Nominal                            | Op. 1 |      |      |    |    | Complies |

Note 1: NA= Not Applicable; NP= Not Performed.

Note 2: Spurious emissions were evaluated with radiated measurement.

Note 3: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.15.2 (FCC ID: XPYUBX19KM01)

Note 4: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.16.3 (FCC ID: XPYUBX19KM01)

Note 5: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.19.3 (FCC ID: XPYUBX19KM01)

Note 6: Leveraged from report # MDE\_UBLOX\_1905\_FCC\_01\_rev01, section 5.20.3 (FCC ID: XPYUBX19KM01)

Note 7: Spot check was performed on the worst case of the leveraged result. Lab takes full responsibility for data leveraging.

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 13 of 63

Page 13 of 63 IC: 20127-BRN404X

FCC ID: 2AEMI-BRN404X



## 7 Reference

## 7.1 Cross Reference Summary


| Band    | Frequency Range<br>(MHz) | Rule Parts          | Emission<br>Designator | FCC ID       | Reference Report<br>Title       | Details                        |
|---------|--------------------------|---------------------|------------------------|--------------|---------------------------------|--------------------------------|
| LTE B2  | 1850 - 1910              | Part 24 RSS-<br>133 | 1M12G7D                | XPYUBX19KM01 | MDE_UBLOX_1905<br>_FCC_01_rev01 | See section 6.2 of this report |
| LTE B4  | 1710 - 1755              | FCC 27<br>RSS-139   | 1M13G7D                | XPYUBX19KM01 | MDE_UBLOX_1905<br>_FCC_01_rev01 | See section 6.3 of this report |
| LTE B5  | 824 - 849                | Part 22 RSS-<br>132 | 1M13G7D                | XPYUBX19KM01 | MDE_UBLOX_1905<br>_FCC_01_rev01 | See section 6.1 of this report |
| LTE B12 | 699 – 716                | FCC 27<br>RSS-139   | 1M13G7D                | XPYUBX19KM01 | MDE_UBLOX_1905<br>_FCC_01_rev01 | See section 6.3 of this report |
| LTE B13 | 777 – 787                | FCC 27<br>RSS-139   | 1M13G7D                | XPYUBX19KM01 | MDE_UBLOX_1905<br>_FCC_01_rev01 | See section 6.3 of this report |

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



7.2 Power Verification

#### LTE B4 (CAT-M1) Frequency MaxPeak RMS Limit Margin Meas. Bandwidth Height Pol Azimuth Corr. Comment (MHz) (dBm) (dBm) (dBm) (dB) Time (kHz) (cm) (deg) (dB) 1729.50 9.78 500.0 50000.0 146.0 Н 108.0 -65.1

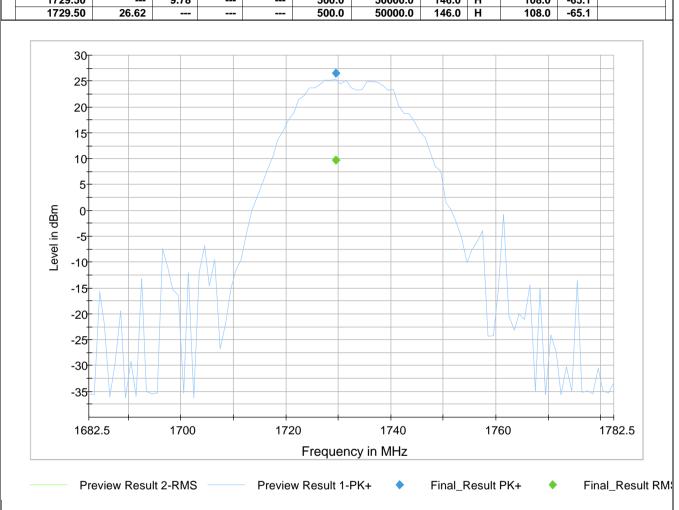

#### 8 Test Result Data

#### 8.1 Radiated Spurious Emissions

2023-03-24

# 8.1.1 Measurement utilizing KDB 971168 D01 Power Meas License Digital Systems v03r01, and according to ANSI/TIA-603-D-2010

Page 15 of 63

Spectrum Analyzer Settings for FCC 22

| out and Adams to the Country of the |               |              |              |  |  |  |  |  |
|---|---------------|--------------|--------------|--|--|--|--|--|
| Frequency Range   | 30MHz – 1 GHz | 1 – 1.58 GHz | 1.58 – 9 GHz |  |  |  |  |  |
| Resolution Bandwidth  | 100 kHz       | 1 MHz        | 1 MHz        |  |  |  |  |  |
| Video Bandwidth   | 100 kHz       | 1 MHz        | 1 MHz        |  |  |  |  |  |
| Detector  | Peak          | Peak         | Peak         |  |  |  |  |  |
| Trace Mode  | Max Hold      | Max Hold     | Max Hold     |  |  |  |  |  |
| Sweep Time  | Auto          | Auto         | Auto         |  |  |  |  |  |

Spectrum Analyzer Settings for FCC 24

| Frequency Range      | 30MHz – 1 GHz | 1 – 2.7 GHz | 2.7 – 18 GHz | 18 – 19.1 GHz |
|----------------------|---------------|-------------|--------------|---------------|
| Resolution Bandwidth | 100 kHz       | 1 MHz       | 1 MHz        | 1 MHz         |
| Video Bandwidth      | 100 kHz       | 1 MHz       | 1 MHz        | 1 MHz         |
| Detector             | Peak          | Peak        | Peak         | Peak          |
| Trace Mode           | Max Hold      | Max Hold    | Max Hold     | Max Hold      |
| Sweep Time           | Auto          | Auto        | Auto         | Auto          |

#### 8.1.2 Limits:

8.1.2.1 FCC Part 22.917 (a); FCC Part 24.238 (a); FCC Part 27.53 (h)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

8.1.2.2 RSS-132 Part 5.5; RSS-133 Part 6.5; RSS-139 Part 6.6 Transmitter Unwanted Emissions Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

i.In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least 43 + 10 log10p (watts).

ii. After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least 43 + 10 log10 p (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

Note: The limit calculation result is a constant of -13 dBm.

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

C\_22\_24\_27\_Rev2 FCC ID: 2AEMI-BRN404X
Page 16 of 63 IC: 20127-BRN404X



## 8.1.3 Test conditions and setup:

2023-03-24

| Ambient Temperature (C) | EUT Set-Up # | EUT operating mode | Power Input |
|-------------------------|--------------|--------------------|-------------|
| 22                      | 1            | Op. 1              | Battery     |

## 8.1.4 Measurement result:


| Plot # | Channel | EUT operating mode | Scan Frequency  | Limit (dBm) | Result |
|--------|---------|--------------------|-----------------|-------------|--------|
| 1-3    | Low     | LTE 2 + BLE        | 30 MHz – 18 GHz | -13         | Pass   |
| 4-8    | Mid     | LTE 2 + BLE        | 9 kHz – 30 GHz  | -13         | Pass   |
| 9-11   | High    | LTE 2 + BLE        | 30 MHz – 18 GHz | -13         | Pass   |
| 12-14  | Low     | LTE 4 + BLE        | 30 MHz – 18 GHz | -13         | Pass   |
| 15-18  | Mid     | LTE 4 + BLE        | 9 kHz – 18 GHz  | -13         | Pass   |
| 19-21  | High    | LTE 4 + BLE        | 30 MHz – 18 GHz | -13         | Pass   |
| 22-24  | Low     | LTE 5 + BLE        | 30 MHz – 9 GHz  | -13         | Pass   |
| 25-28  | Mid     | LTE 5 + BLE        | 9 kHz – 9 GHz   | -13         | Pass   |
| 29-31  | High    | LTE 5 + BLE        | 30 MHz – 9 GHz  | -13         | Pass   |
| 32-34  | Low     | LTE 12 + BLE       | 30 MHz – 9 GHz  | -13         | Pass   |
| 35-38  | Mid     | LTE 12 + BLE       | 9 kHz – 9 GHz   | -13         | Pass   |
| 39-41  | High    | LTE 12 + BLE       | 30 MHz – 9 GHz  | -13         | Pass   |
| 42-45  | Mid     | LTE 13 + BLE       | 9 kHz – 9 GHz   | -13         | Pass   |

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 17 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



### 8.1.5 Measurement Plots:

|   | Plot # 1           |                  |              |                |                |                    |                 |             |     |               |               |
|---|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|
|   | Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |
|   | 70.84              |                  | -70.13       |                |                | 500.0              | 120.0           | 107.0       | ٧   | -3.0          | -117.4        |
| Ī | 70.84              | -60.64           |              | -13.00         | 47.64          | 500.0              | 120.0           | 107.0       | ٧   | -3.0          | -117.4        |
|   | 105.68             |                  | -70.44       |                |                | 500.0              | 120.0           | 100.0       | ٧   | 223.0         | -108.9        |
|   | 105.68             | -65.71           |              | -13.00         | 52.71          | 500.0              | 120.0           | 100.0       | ٧   | 223.0         | -108.9        |
|   | 240.05             | -58.47           |              | -13.00         | 45.47          | 500.0              | 120.0           | 156.0       | Н   | 281.0         | -110.0        |
| Ī | 240.05             |                  | -74.18       |                |                | 500.0              | 120.0           | 156.0       | Н   | 281.0         | -110.0        |
|   | 589.81             | -30.38           |              | -13.00         | 17.38          | 500.0              | 120.0           | 107.0       | Н   | 262.0         | -102.4        |
|   | 589.81             |                  | -53.86       |                |                | 500.0              | 120.0           | 107.0       | Н   | 262.0         | -102.4        |

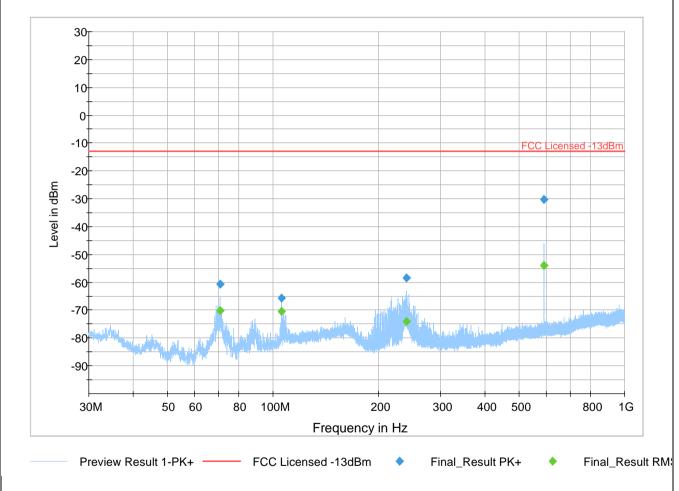


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 18 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X




|           |         |        |       |        | Plot # 2   |           |        |     |         |       |  |
|-----------|---------|--------|-------|--------|------------|-----------|--------|-----|---------|-------|--|
| Frequency | MaxPeak | RMS    | Limit | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm) | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |  |
| 1262.25   |         | -56.92 |       |        | 500.0      | 1000.0    | 263.0  | Н   | 252.0   | -66.7 |  |
| 1847.00   |         | -56.94 |       |        | 500.0      | 1000.0    | 107.0  | ٧   | 11.0    | -64.3 |  |
| 1858.25   |         | -40.69 |       |        | 500.0      | 1000.0    | 100.0  | Н   | 95.0    | -64.2 |  |
| 1861.25   |         | -45.95 |       |        | 500.0      | 1000.0    | 134.0  | Н   | 204.0   | -64.2 |  |
| 2111 75   |         | 40.00  |       |        | 500.0      | 1000.0    | 117.0  | Ц   | 67.0    | 62 E  |  |

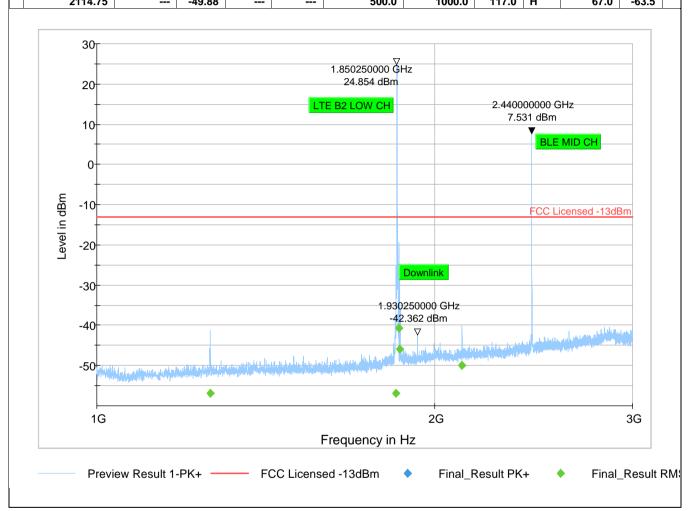

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 19 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



|           |         |        |        |        | Plot # 3   |           |        |     |         |        |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |
| 3702.00   |         | -57.42 |        |        | 500.0      | 1000.0    | 137.0  | Н   | -11.0   | -100.6 |
| 3702.00   | -41.01  |        | -13.00 | 28.01  | 500.0      | 1000.0    | 137.0  | Н   | -11.0   | -100.6 |
| 7319.25   |         | -52.44 |        |        | 500.0      | 1000.0    | 107.0  | Н   | 26.0    | -95.6  |
| 7319.25   | -42.88  |        | -13.00 | 29.88  | 500.0      | 1000.0    | 107.0  | Н   | 26.0    | -95.6  |
| 9759.75   |         | -55.92 |        |        | 500.0      | 1000.0    | 194.0  | Н   | 71.0    | -93.1  |
| 0750 75   | 44.00   |        | 40.00  | 04.00  | 500 O      | 4000 0    | 4040   |     | 74.0    | 00.4   |

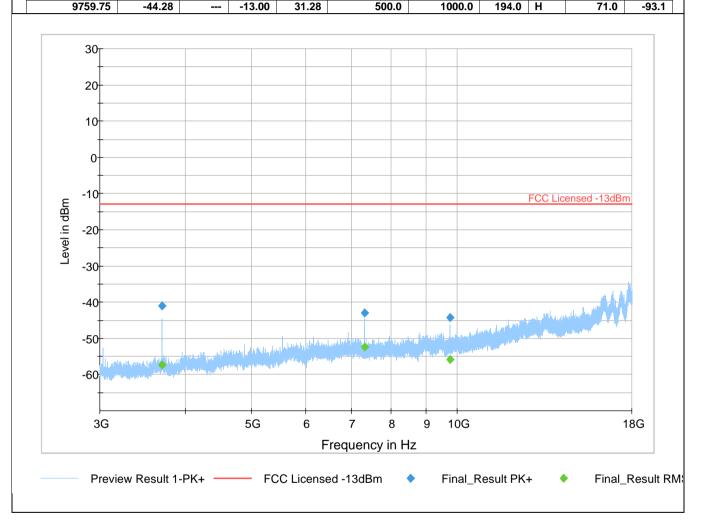


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 Page 20 of 63 2023-03-24

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Plot #4 RMS Meas. Time MaxPeak Limit Bandwidth Height Pol Azimuth

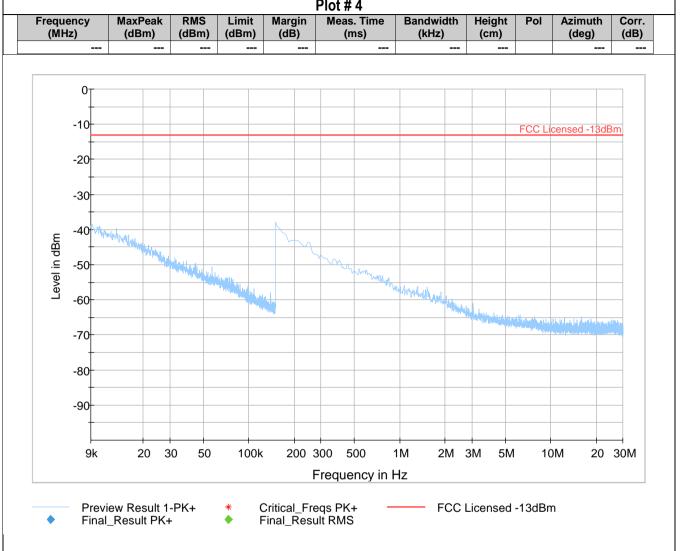


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 21 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



| _ |                    |                  |              |                |                |                    |                 |             |     |               |               |
|---|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|
|   |                    |                  |              |                | F              | Plot # 5           |                 |             |     |               |               |
|   | Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |
|   | 62.45              | -75.25           |              | -13.00         | 62.25          | 500.0              | 120.0           | 160.0       | ٧   | -11.0         | -117.8        |
|   | 62.45              |                  | -89.53       |                |                | 500.0              | 120.0           | 160.0       | ٧   | -11.0         | -117.8        |
|   | 70.21              | -63.95           |              | -13.00         | 50.95          | 500.0              | 120.0           | 100.0       | ٧   | 89.0          | -117.5        |
|   | 70.21              |                  | -73.93       |                |                | 500.0              | 120.0           | 100.0       | ٧   | 89.0          | -117.5        |
|   | 105.71             |                  | -68.87       |                |                | 500.0              | 120.0           | 100.0       | ٧   | 12.0          | -108.9        |
|   | 105.71             | -63.93           |              | -13.00         | 50.93          | 500.0              | 120.0           | 100.0       | ٧   | 12.0          | -108.9        |
|   | 243.06             | -59.66           |              | -13.00         | 46.66          | 500.0              | 120.0           | 134.0       | Н   | 272.0         | -109.4        |
|   | 243.06             |                  | -74.38       |                |                | 500.0              | 120.0           | 134.0       | Н   | 272.0         | -109.4        |
|   | 559.77             | -27.19           |              | -13.00         | 14.19          | 500.0              | 120.0           | 107.0       | Н   | 256.0         | -103.5        |
|   | 559.77             | -                | -50.34       |                |                | 500.0              | 120.0           | 107.0       | Н   | 256.0         | -103.5        |

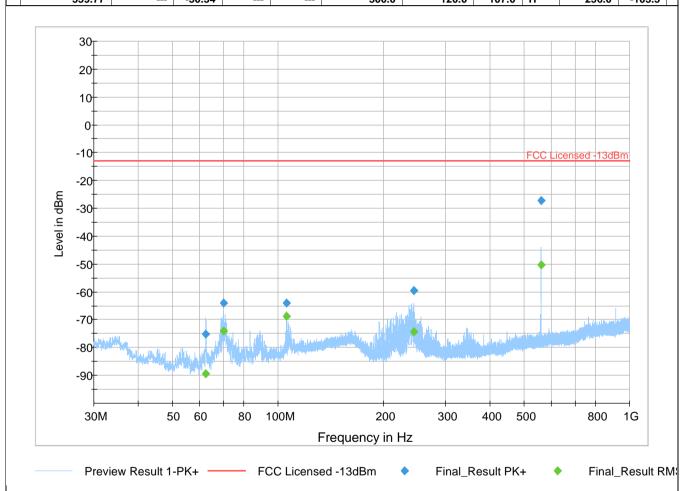

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X





Date of Report

2023-03-24

Page 22 of 63

IC: 20127-BRN404X

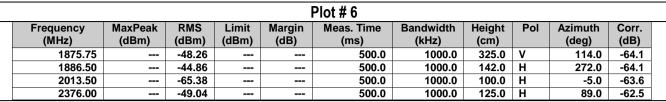

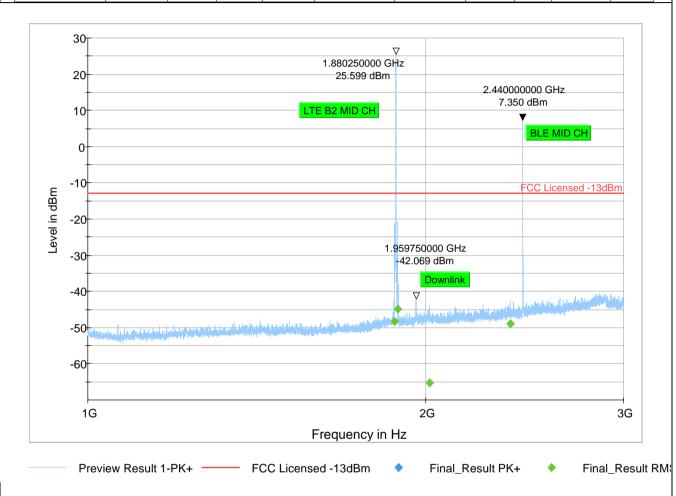


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 23 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



|         |     |       |        | Plot # 7 |
|---------|-----|-------|--------|----------|
| MaxPeak | RMS | Limit | Margin | Meas. 7  |

|           |         |        |        | •      | 100 // 1   |           |        |     |         |        |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |
| 3760.50   |         | -61.58 | -      |        | 500.0      | 1000.0    | 142.0  | ٧   | -11.0   | -100.9 |  |
| 3760.50   | -45.12  | -      | -13.00 | 32.12  | 500.0      | 1000.0    | 142.0  | ٧   | -11.0   | -100.9 |  |
| 9760.00   | -       | -52.49 |        |        | 500.0      | 1000.0    | 100.0  | ٧   | 138.0   | -93.1  |  |
| 9760.00   | -40.12  | -      | -13.00 | 27.12  | 500.0      | 1000.0    | 100.0  | ٧   | 138.0   | -93.1  |  |

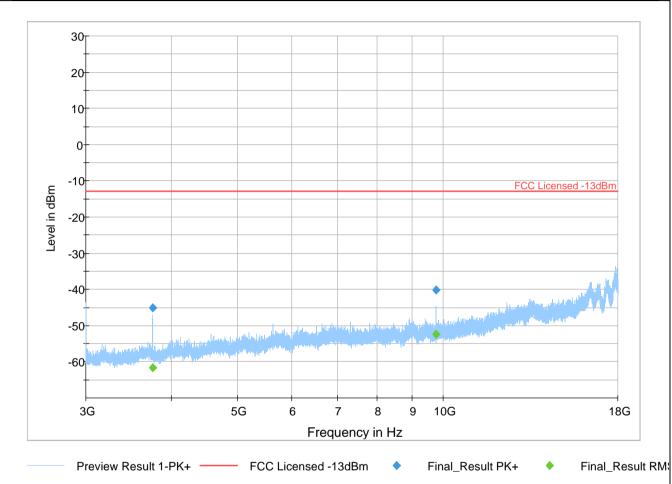


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 24 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Plot#8 Frequency (MHz) Margin (dB) Corr. (dB) MaxPeak RMS Bandwidth Height Azimuth Limit Meas. Time Pol (dBm) (dBm) (kHz) (dBm) (ms) (cm) (deg)

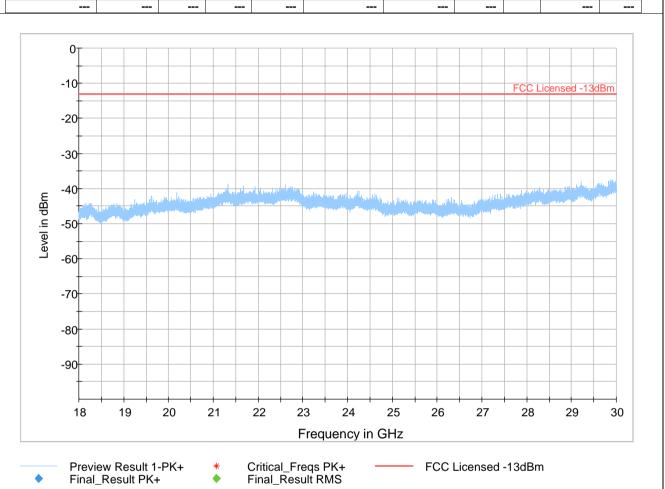


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 25 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



|           |         |        |        | l      | Plot # 9   |           |        |     |         |        |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |
| 69.67     |         | -73.00 |        |        | 500.0      | 120.0     | 190.0  | ٧   | -5.0    | -117.6 |
| 69.67     | -62.31  |        | -13.00 | 49.31  | 500.0      | 120.0     | 190.0  | ٧   | -5.0    | -117.6 |
| 105.64    |         | -75.79 |        |        | 500.0      | 120.0     | 100.0  | ٧   | 17.0    | -108.9 |
| 105.64    | -67.45  |        | -13.00 | 54.45  | 500.0      | 120.0     | 100.0  | ٧   | 17.0    | -108.9 |
| 234.09    | -58.80  |        | -13.00 | 45.80  | 500.0      | 120.0     | 151.0  | Н   | 295.0   | -110.8 |
| 234.09    |         | -77.73 |        |        | 500.0      | 120.0     | 151.0  | Н   | 295.0   | -110.8 |
| E20.04    | 27 90   |        | 12.00  | 44 00  | 500.0      | 120.0     | 107.0  | Г   | 252.0   | 102.0  |

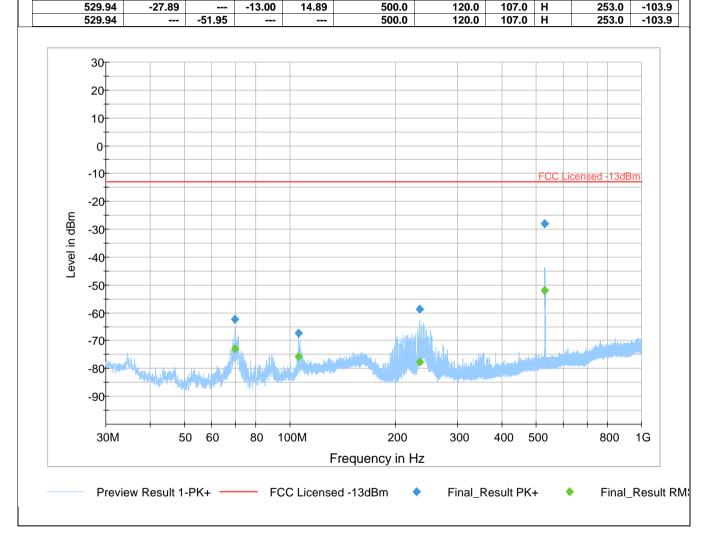

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X

2G

Final\_Result PK+

Frequency in Hz

Preview Result 1-PK+ FCC Licensed -13dBm



3G

Final\_Result RM:

Date of Report


-40

1G

2023-03-24

Page 26 of 63


IC: 20127-BRN404X

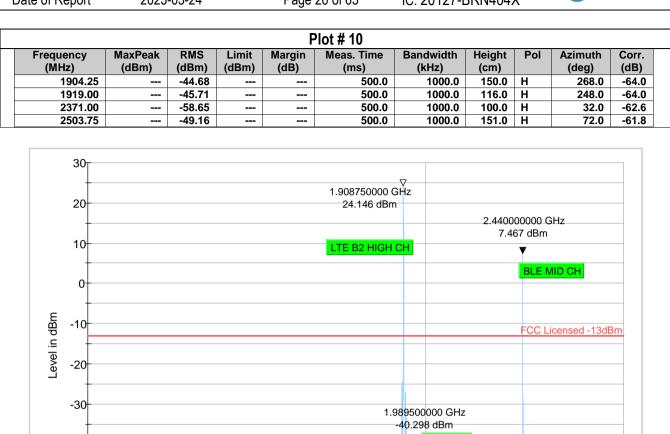

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 27 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



|           |         |        |        | Р      | Plot # 11  |           |        |     |         |        |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |
| 3819.25   |         | -58.55 |        |        | 500.0      | 1000.0    | 241.0  | ٧   | 17.0    | -101.4 |
| 3819.25   | -42.03  |        | -13.00 | 29.03  | 500.0      | 1000.0    | 241.0  | ٧   | 17.0    | -101.4 |
| 7319.00   |         | -53.85 |        |        | 500.0      | 1000.0    | 126.0  | Н   | 24.0    | -95.6  |
| 7319.00   | -43.14  |        | -13.00 | 30.14  | 500.0      | 1000.0    | 126.0  | Н   | 24.0    | -95.6  |
| 9761.00   |         | -49.15 |        |        | 500.0      | 1000.0    | 100.0  | ٧   | 135.0   | -93.1  |
| 9761.00   | -39.50  |        | -13.00 | 26.50  | 500.0      | 1000.0    | 100.0  | ٧   | 135.0   | -93.1  |

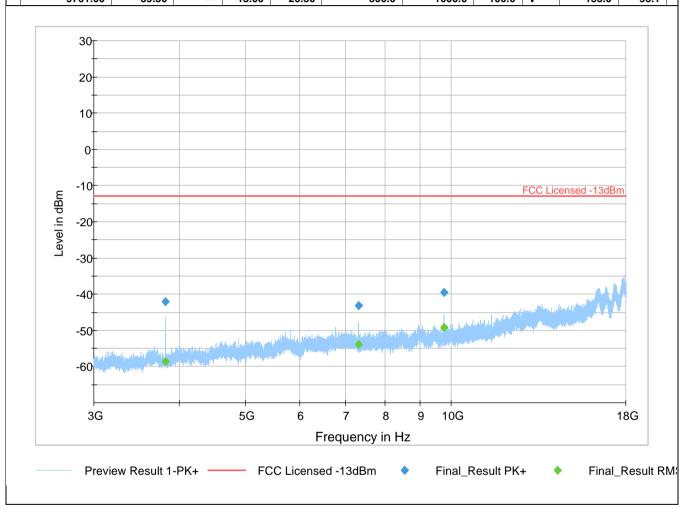


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 28 of 63

Rev2 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Date of Report 2023-03-24 Pa

|   | Plot # 12          |                  |              |                |                |                    |                    |                |     |               |               |  |
|---|--------------------|------------------|--------------|----------------|----------------|--------------------|--------------------|----------------|-----|---------------|---------------|--|
|   | Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth<br>(kHz) | Height<br>(cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |
|   | 69.67              |                  | -74.95       |                |                | 500.0              | 100.0              | 125.0          | ٧   | -56.0         | -82.0         |  |
| l | 69.67              | -64.85           |              | -13.00         | 51.85          | 500.0              | 100.0              | 125.0          | ٧   | -56.0         | -82.0         |  |

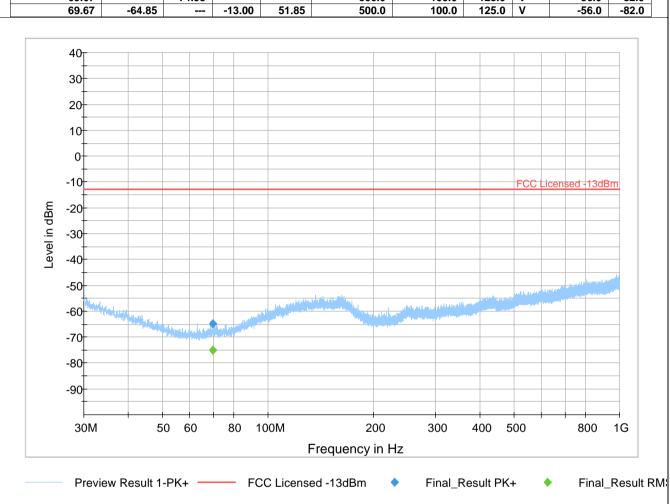

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X





Date of Report

2023-03-24

Page 29 of 63

IC: 20127-BRN404X

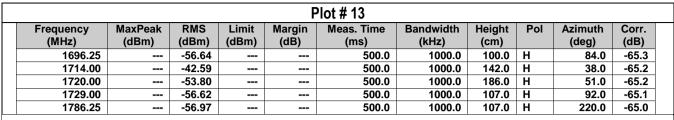


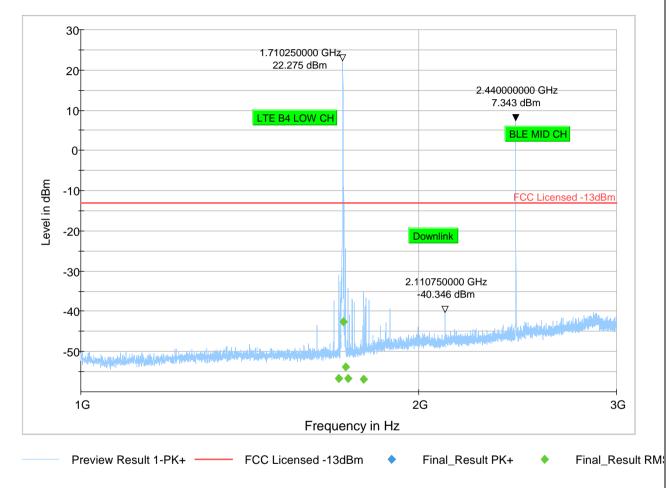

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 30 of 63 FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



|     |           |         |        |        | P      | Plot # 14  |           |        |     |         |        |
|-----|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|
|     | Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |
|     | (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |
|     | 3169.25   |         | -60.77 |        |        | 500.0      | 1000.0    | 183.0  | Н   | 279.0   | -102.7 |
|     | 3169.25   | -42.40  |        | -13.00 | 29.40  | 500.0      | 1000.0    | 183.0  | Н   | 279.0   | -102.7 |
|     | 3422.00   |         | -52.28 |        |        | 500.0      | 1000.0    | 134.0  | Н   | 60.0    | -102.4 |
|     | 3422.00   | -35.82  |        | -13.00 | 22.82  | 500.0      | 1000.0    | 134.0  | Н   | 60.0    | -102.4 |
|     | 11972.25  |         | -52.22 |        |        | 500.0      | 1000.0    | 284.0  | Н   | 265.0   | -90.6  |
| l f | 44070.05  | 00 F.4  |        | 42.00  | 40 E4  | 500.0      | 4000 0    | 204.0  | 11  | 205.0   | 00.0   |

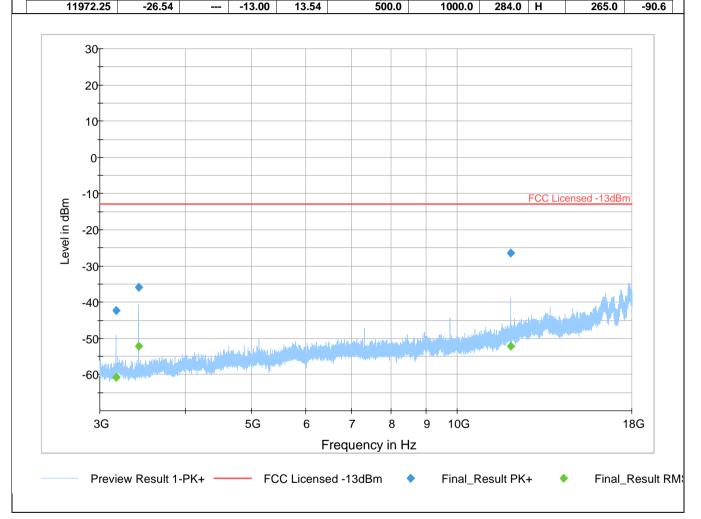


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 31 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Plot # 15 Frequency (MHz) Margin (dB) Corr. (dB) RMS MaxPeak Limit Meas. Time Bandwidth Height Pol Azimuth (dBm) (dBm) (dBm) (ms) (kHz) (cm) (deg)

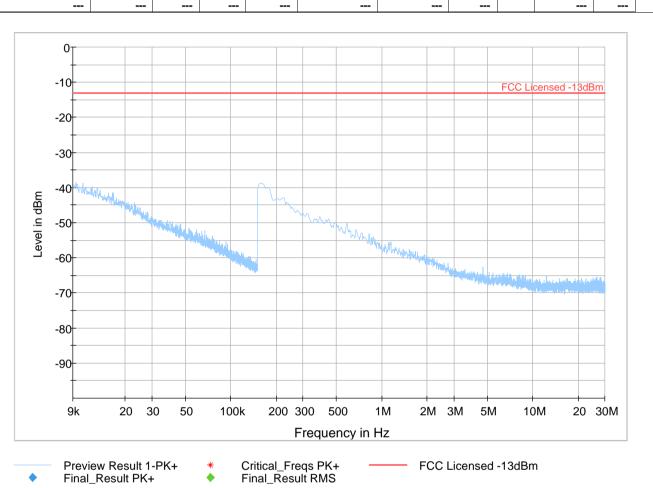

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X




Date of Report

2023-03-24 Page 32 of 63

2 01 03 IG. 20 121-DRIN404A

|           |         |        |        | Р      | lot # 16   |           |        |     |         |       |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |
| 36.91     |         | -80.82 |        |        | 500.0      | 100.0     | 158.0  | ٧   | 72.0    | -74.2 |
| 36.91     | -68.81  |        | -13.00 | 55.81  | 500.0      | 100.0     | 158.0  | ٧   | 72.0    | -74.2 |
| 71.03     |         | -73.25 |        |        | 500.0      | 100.0     | 117.0  | ٧   | 23.0    | -81.8 |
| 71.03     | -63.05  |        | -13.00 | 50.05  | 500.0      | 100.0     | 117.0  | ٧   | 23.0    | -81.8 |

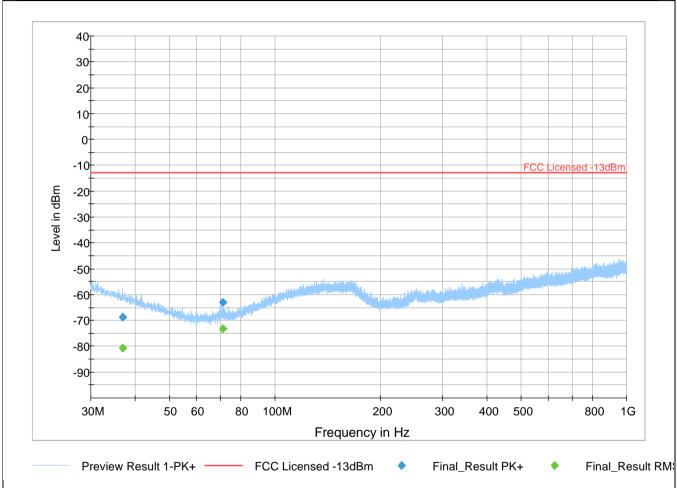

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 Page 33 of 63 2023-03-24


IC: 20127-BRN404X

FCC ID: 2AEMI-BRN404X



Dlot # 17

|           |         |        |       |        | 10t # 1 <i>1</i> |           |        |     |         |       |  |
|-----------|---------|--------|-------|--------|------------------|-----------|--------|-----|---------|-------|--|
| Frequency | MaxPeak | RMS    | Limit | Margin | Meas. Time       | Bandwidth | Height | Pol | Azimuth | Corr. |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm) | (dB)   | (ms)             | (kHz)     | (cm)   |     | (deg)   | (dB)  |  |
| 1717.00   | -       | -55.99 |       |        | 500.0            | 1000.0    | 134.0  | Н   | 258.0   | -65.2 |  |
| 1740.75   | -       | -50.83 |       | -      | 500.0            | 1000.0    | 142.0  | Н   | 251.0   | -65.1 |  |
| 1763.25   |         | -56.70 |       |        | 500.0            | 1000.0    | 296.0  | Н   | 249.0   | -65.0 |  |
| 1793.25   | -       | -56.62 |       | -      | 500.0            | 1000.0    | 125.0  | Н   | 254.0   | -64.9 |  |
| 2132.25   | -       | -45.58 |       | -      | 500.0            | 1000.0    | 296.0  | ٧   | 28.0    | -63.4 |  |

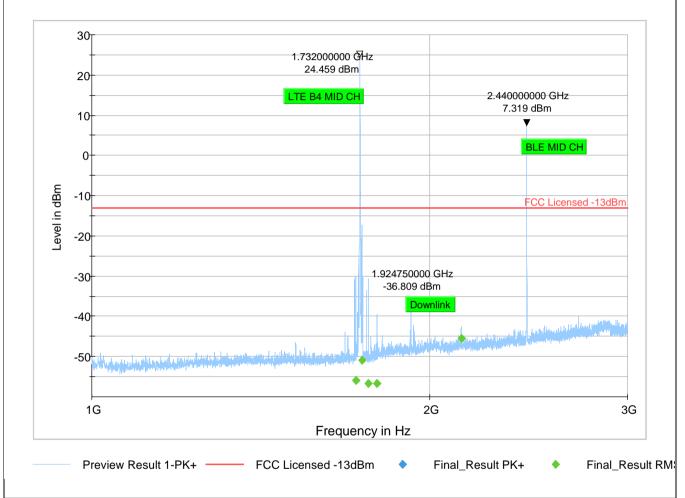


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 34 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



| P           | lot # 18           |                 |     |
|-------------|--------------------|-----------------|-----|
| rgin<br>IB) | Meas. Time<br>(ms) | Bandwidth (kHz) | H ( |
|             |                    |                 |     |

| Plot # 18 |           |         |        |        |        |            |           |        |     |         |        |   |
|-----------|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|---|
|           | Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |   |
|           | (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   | ı |
|           | 3147.50   |         | -57.94 |        |        | 500.0      | 1000.0    | 226.0  | Н   | 140.0   | -103.0 | ı |
|           | 3147.50   | -38.80  |        | -13.00 | 25.80  | 500.0      | 1000.0    | 226.0  | Н   | 140.0   | -103.0 | ı |
|           | 3465.75   |         | -55.70 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 48.0    | -102.2 |   |
|           | 3465.75   | -39.60  |        | -13.00 | 26.60  | 500.0      | 1000.0    | 100.0  | Н   | 48.0    | -102.2 |   |
|           | 12125.00  |         | -50.30 |        |        | 500.0      | 1000.0    | 325.0  | Н   | 262.0   | -90.0  |   |
|           | 12125.00  | -22.76  |        | -13.00 | 9.76   | 500.0      | 1000.0    | 325.0  | Н   | 262.0   | -90.0  |   |

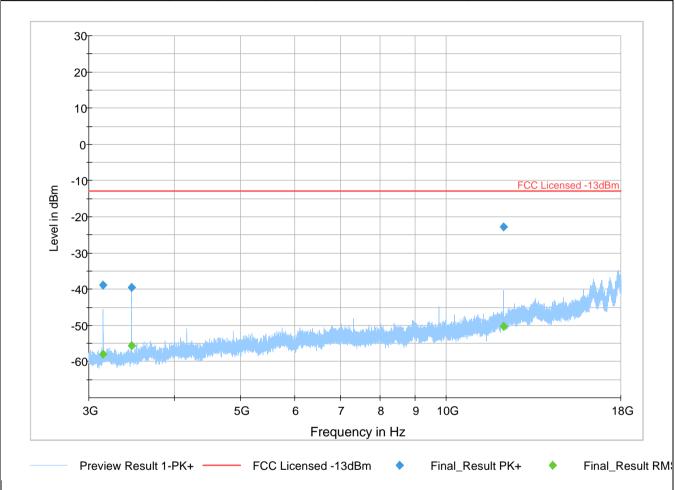

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X




Date of Report

2023-03-24

Page 35 of 63

IC: 20127-BRN404X

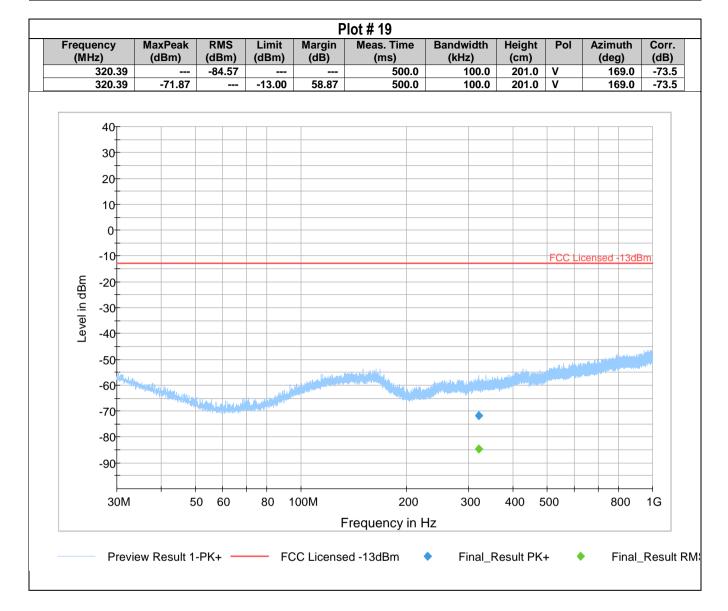

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X





Date of Report

2023-03-24

Page 36 of 63

IC: 20127-BRN404X

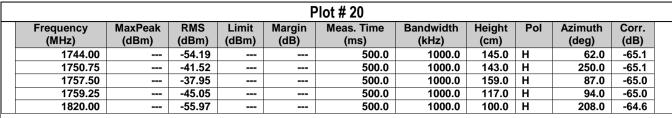


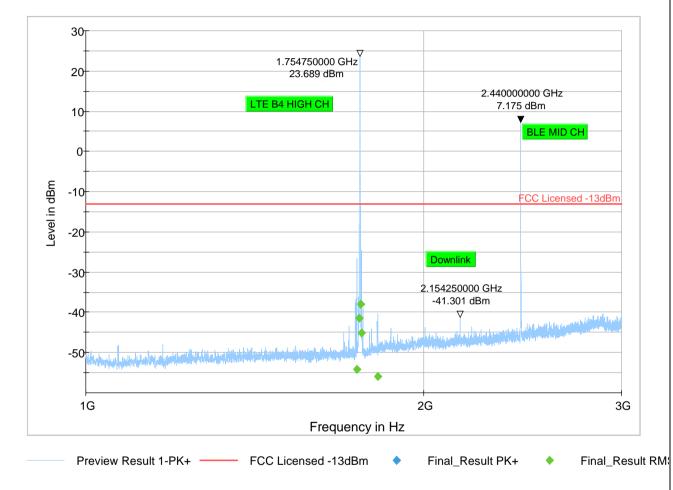

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 37 of 63




| Plot # 21 |         |        |        |        |            |           |        |     |         |        |  |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |  |
| 3125.25   |         | -52.99 |        | -      | 500.0      | 1000.0    | 276.0  | ٧   | 284.0   | -103.3 |  |  |
| 3125.25   | -34.84  |        | -13.00 | 21.84  | 500.0      | 1000.0    | 276.0  | ٧   | 284.0   | -103.3 |  |  |
| 3507.25   |         | -62.29 |        |        | 500.0      | 1000.0    | 143.0  | Н   | -7.0    | -102.2 |  |  |
| 3507.25   | -44.51  |        | -13.00 | 31.51  | 500.0      | 1000.0    | 143.0  | Н   | -7.0    | -102.2 |  |  |
| 4194.50   |         | -59.89 |        | -      | 500.0      | 1000.0    | 151.0  | Н   | 128.0   | -99.2  |  |  |
| 4194.50   | -43.26  | -      | -13.00 | 30.26  | 500.0      | 1000.0    | 151.0  | Н   | 128.0   | -99.2  |  |  |
|           |         |        |        |        |            |           |        |     |         |        |  |  |

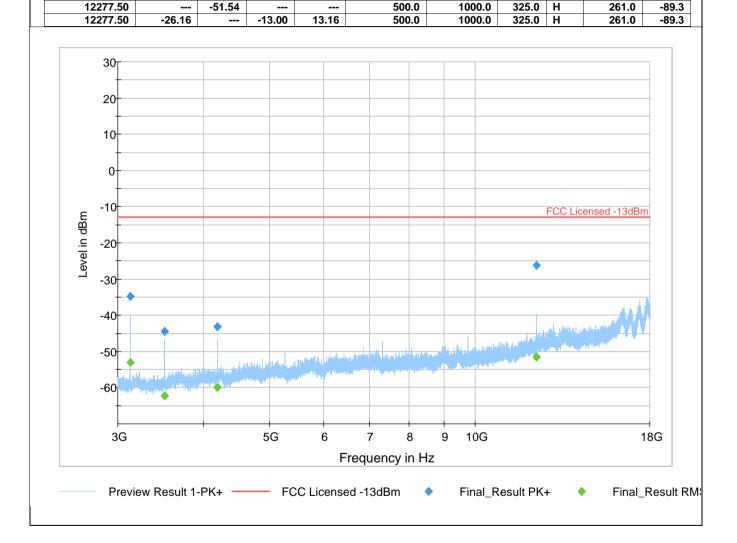

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 38 of 63




| Plot # 22 |         |        |        |        |            |           |        |     |         |       |  |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|--|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |  |  |
| 152.93    | -67.16  |        | -13.00 | 54.16  | 500.0      | 100.0     | 120.0  | ٧   | 77.0    | -69.4 |  |  |
| 152.93    |         | -80.36 |        |        | 500.0      | 100.0     | 120.0  | ٧   | 77.0    | -69.4 |  |  |
| 234.22    | -59.06  |        | -13.00 | 46.06  | 500.0      | 100.0     | 125.0  | Н   | 293.0   | -75.3 |  |  |
| 234.22    |         | -76.75 |        |        | 500.0      | 100.0     | 125.0  | Н   | 293.0   | -75.3 |  |  |
| 790.80    |         | -60.28 |        |        | 500.0      | 100.0     | 116.0  | Н   | 276.0   | -64.4 |  |  |
| 790.80    | -46.29  |        | -13.00 | 33.29  | 500.0      | 100.0     | 116.0  | Н   | 276.0   | -64.4 |  |  |
| 869.57    | -35.20  |        | -13.00 | 22.20  | 500.0      | 100.0     | 229.0  | ٧   | 328.0   | -64.2 |  |  |
| 869.57    |         | -44.42 |        |        | 500.0      | 100.0     | 229.0  | ٧   | 328.0   | -64.2 |  |  |
| 881.98    | -56.65  |        | -13.00 | 43.65  | 500.0      | 100.0     | 160.0  | Н   | 139.0   | -64.4 |  |  |
| 881 08    |         | -70 16 |        |        | 500.0      | 100.0     | 160.0  | н   | 130 0   | -64.4 |  |  |

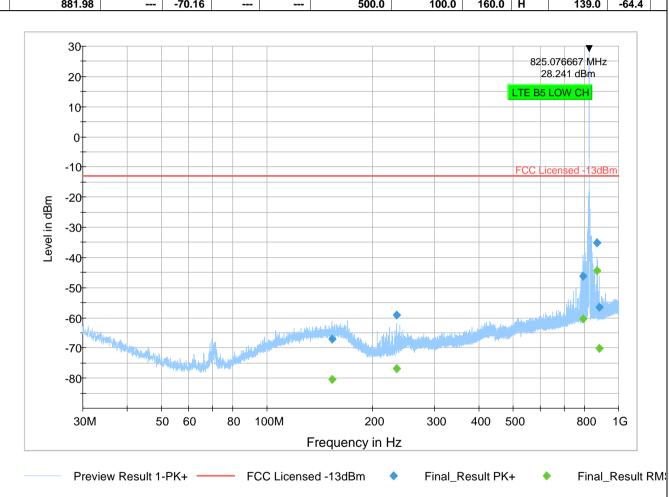

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 39 of 63




|     |                    | Plot # 23        |              |                |                |                    |                 |             |     |               |               |  |  |  |
|-----|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|--|--|--|
|     | Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |  |  |
|     | 1121.25            | -47.15           |              | -13.00         | 34.15          | 500.0              | 1000.0          | 227.0       | Н   | 256.0         | -92.8         |  |  |  |
|     | 1121.25            |                  | -70.57       |                |                | 500.0              | 1000.0          | 227.0       | Н   | 256.0         | -92.8         |  |  |  |
|     | 1650.00            | -50.29           |              | -13.00         | 37.29          | 500.0              | 1000.0          | 145.0       | Н   | -3.0          | -91.8         |  |  |  |
|     | 1650.00            |                  | -66.28       |                |                | 500.0              | 1000.0          | 145.0       | Н   | -3.0          | -91.8         |  |  |  |
|     | 2248.00            | -48.19           |              | -13.00         | 35.19          | 500.0              | 1000.0          | 100.0       | Н   | 255.0         | -89.3         |  |  |  |
|     | 2248.00            |                  | -55.21       |                |                | 500.0              | 1000.0          | 100.0       | Н   | 255.0         | -89.3         |  |  |  |
|     | 2375.75            |                  | -52.29       |                |                | 500.0              | 1000.0          | 129.0       | Н   | 340.0         | -89.0         |  |  |  |
|     | 2375.75            | -45.45           |              | -13.00         | 32.45          | 500.0              | 1000.0          | 129.0       | Н   | 340.0         | -89.0         |  |  |  |
|     | 2484.00            |                  | -57.05       |                |                | 500.0              | 1000.0          | 134.0       | Н   | 308.0         | -88.8         |  |  |  |
|     | 2484.00            | -47.27           |              | -13.00         | 34.27          | 500.0              | 1000.0          | 134.0       | Н   | 308.0         | -88.8         |  |  |  |
|     | 2504.25            | -47.04           |              | -13.00         | 34.04          | 500.0              | 1000.0          | 107.0       | Н   | 313.0         | -88.7         |  |  |  |
| - 1 | 0504.05            |                  | E 4 00       |                |                |                    | 40000           | 40=0        |     | 0400          | ~~ -          |  |  |  |

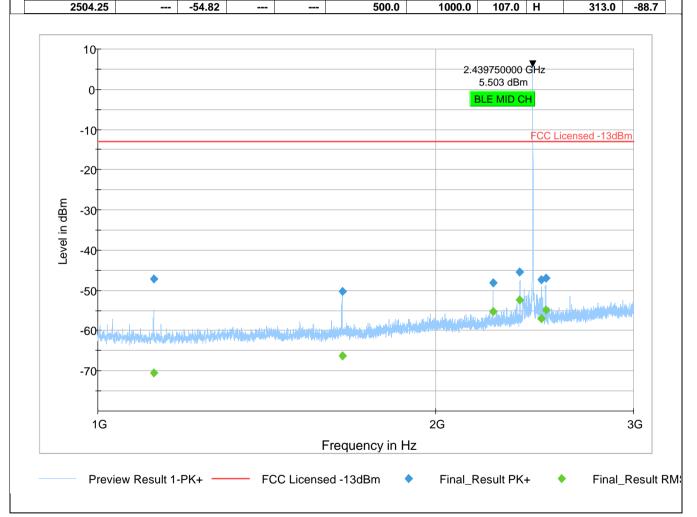





| Plot # 24 |         |        |        |        |            |           |        |     |         |        |  |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |  |
| 3265.00   | -31.98  |        | -13.00 | 18.98  | 500.0      | 1000.0    | 142.0  | Н   | 284.0   | -103.0 |  |  |
| 3265.00   |         | -49.29 |        |        | 500.0      | 1000.0    | 142.0  | Н   | 284.0   | -103.0 |  |  |
| 4054.75   | -36.13  |        | -13.00 | 23.14  | 500.0      | 1000.0    | 304.0  | ٧   | 274.0   | -100.1 |  |  |
| 4054.75   |         | -54.22 |        |        | 500.0      | 1000.0    | 304.0  | ٧   | 274.0   | -100.1 |  |  |
| 4088.50   |         | -62.40 |        |        | 500.0      | 1000.0    | 143.0  | Н   | 16.0    | -99.6  |  |  |
| 4088.50   | -39.31  |        | -13.00 | 26.31  | 500.0      | 1000.0    | 143.0  | Н   | 16.0    | -99.6  |  |  |
| 7319.25   |         | -52.03 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 27.0    | -95.6  |  |  |

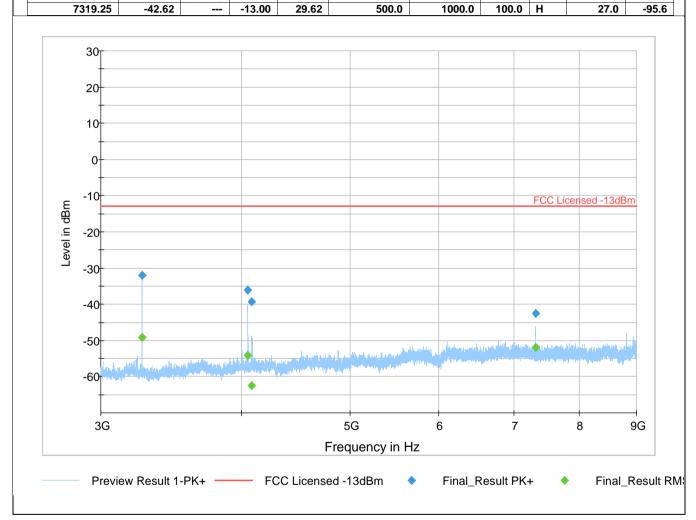

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 41 of 63






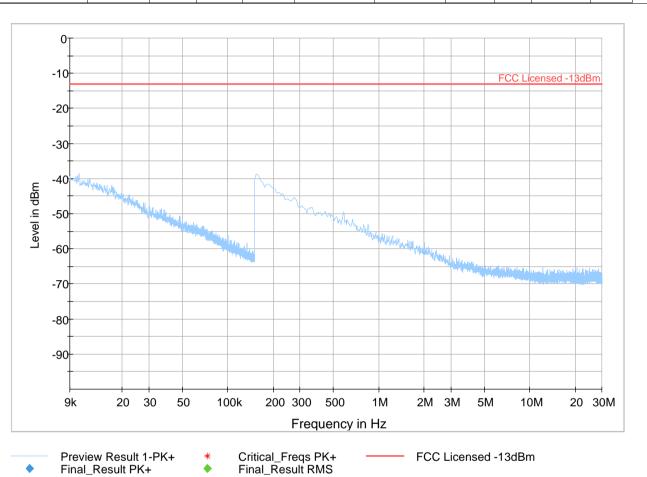

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 42 of 63



| Plot # 26          |                  |              |                |                |                    |                 |             |     |               |               |  |  |
|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|--|--|
| Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |  |
| 70.80              | -61.98           |              | -13.00         | 48.99          | 500.0              | 100.0           | 107.0       | ٧   | -2.0          | -81.8         |  |  |
| 70.80              |                  | -72.43       |                |                | 500.0              | 100.0           | 107.0       | ٧   | -2.0          | -81.8         |  |  |
| 234.15             | -70.34           |              | -13.00         | 57.34          | 500.0              | 100.0           | 258.0       | Н   | 204.0         | -75.3         |  |  |
| 234.15             |                  | -85.87       |                |                | 500.0              | 100.0           | 258.0       | Н   | 204.0         | -75.3         |  |  |
| 817.70             |                  | -59.75       |                |                | 500.0              | 100.0           | 117.0       | Н   | 195.0         | -64.0         |  |  |
| 817.70             | -40.80           |              | -13.00         | 27.80          | 500.0              | 100.0           | 117.0       | Н   | 195.0         | -64.0         |  |  |
| 941.44             | -60.80           |              | -13.00         | 47.80          | 500.0              | 100.0           | 154.0       | Н   | -30.0         | -63.6         |  |  |
| 941.44             |                  | -74.11       |                |                | 500.0              | 100.0           | 154.0       | Н   | -30.0         | -63.6         |  |  |

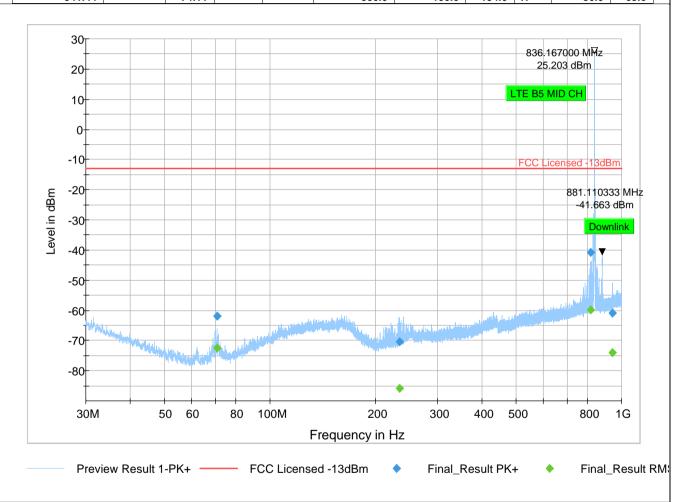


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 43 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Date of Report

|   | Plot # 27          |                  |              |                |                |                    |                 |             |     |               |               |  |  |
|---|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|--|--|
|   | Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |  |
|   | 1045.25            | -43.62           |              | -13.00         | 30.62          | 500.0              | 1000.0          | 210.0       | Н   | 67.0          | -93.2         |  |  |
|   | 1045.25            |                  | -68.30       |                |                | 500.0              | 1000.0          | 210.0       | Н   | 67.0          | -93.2         |  |  |
|   | 1671.75            | -47.51           |              | -13.00         | 34.51          | 500.0              | 1000.0          | 100.0       | Н   | 46.0          | -91.7         |  |  |
|   | 1671.75            |                  | -66.60       |                |                | 500.0              | 1000.0          | 100.0       | Н   | 46.0          | -91.7         |  |  |
|   | 2247.75            | -46.15           |              | -13.00         | 33.15          | 500.0              | 1000.0          | 100.0       | Н   | 150.0         | -89.3         |  |  |
|   | 2247.75            |                  | -53.78       |                |                | 500.0              | 1000.0          | 100.0       | Н   | 150.0         | -89.3         |  |  |
|   | 2376.00            | -45.97           |              | -13.00         | 32.97          | 500.0              | 1000.0          | 117.0       | Н   | 157.0         | -89.0         |  |  |
|   | 2376.00            |                  | -52.12       |                |                | 500.0              | 1000.0          | 117.0       | Н   | 157.0         | -89.0         |  |  |
| 1 | 2504 00            |                  | -52 43       |                |                | 500.0              | 1000.0          | 142.0       | Н   | 333.0         | -88.7         |  |  |

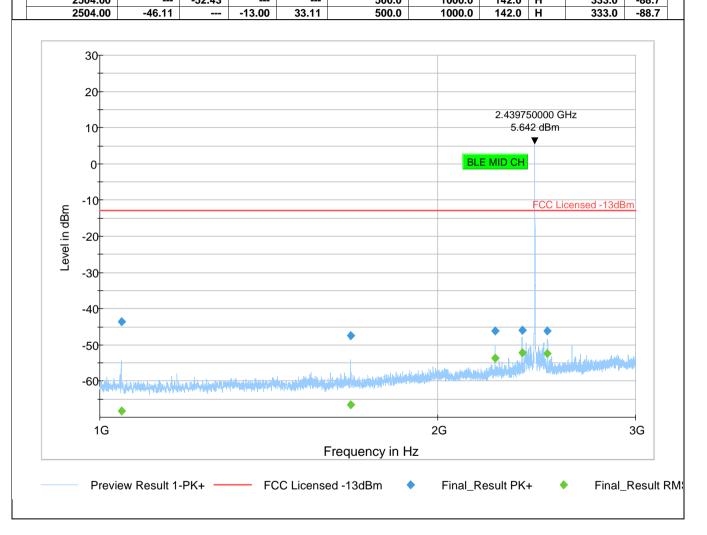

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2


FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Date of Report 2023-03-24

Page 44 of 63


| Plot # 28 |         |        |        |        |            |           |        |     |         |        |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |
| 3276.75   | -34.72  |        | -13.00 | 21.72  | 500.0      | 1000.0    | 169.0  | Н   | 54.0    | -103.1 |  |
| 3276.75   |         | -52.62 |        |        | 500.0      | 1000.0    | 169.0  | Н   | 54.0    | -103.1 |  |
| 4044.25   | -34.28  |        | -13.00 | 21.28  | 500.0      | 1000.0    | 206.0  | ٧   | 277.0   | -100.2 |  |
| 4044.25   |         | -56.83 |        |        | 500.0      | 1000.0    | 206.0  | ٧   | 277.0   | -100.2 |  |
| 7320.50   |         | -53.00 | -      |        | 500.0      | 1000.0    | 107.0  | Н   | 27.0    | -95.6  |  |
| 7320 50   | -43.40  |        | -12 00 | 30.40  | 500.0      | 1000 0    | 107.0  | н   | 27.0    | -05.6  |  |

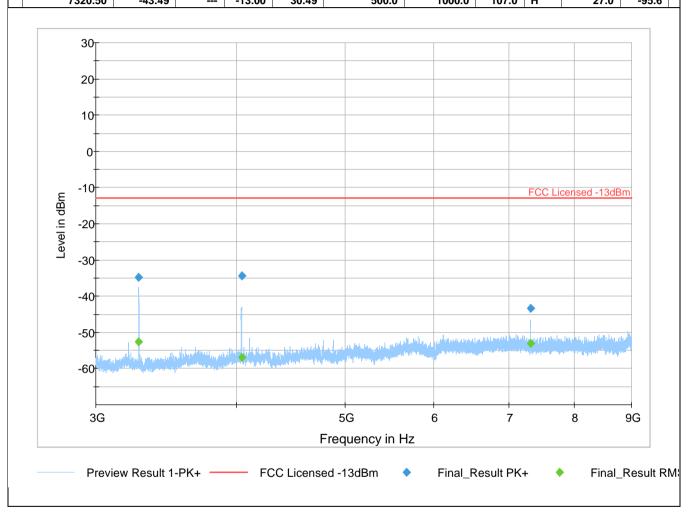

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 45 of 63




| Plot # 29          |                  |              |                |                |                    |                 |             |     |               |               |  |  |
|--------------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|--|--|
| Frequency<br>(MHz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |  |
| 61.91              | -76.65           |              | -13.00         | 63.65          | 500.0              | 100.0           | 263.0       | ٧   | 90.0          | -82.2         |  |  |
| 61.91              |                  | -88.67       |                |                | 500.0              | 100.0           | 263.0       | ٧   | 90.0          | -82.2         |  |  |
| 70.84              |                  | -72.79       |                |                | 500.0              | 100.0           | 107.0       | ٧   | -30.0         | -81.8         |  |  |
| 70.84              | -63.10           |              | -13.00         | 50.10          | 500.0              | 100.0           | 107.0       | ٧   | -30.0         | -81.8         |  |  |
| 164.54             | -67.55           |              | -13.00         | 54.55          | 500.0              | 100.0           | 116.0       | ٧   | 107.0         | -69.2         |  |  |
| 164.54             |                  | -80.09       |                |                | 500.0              | 100.0           | 116.0       | ٧   | 107.0         | -69.2         |  |  |
| 220.80             |                  | -86.37       |                |                | 500.0              | 100.0           | 168.0       | Н   | 12.0          | -76.6         |  |  |
| 220.80             | -71.79           |              | -13.00         | 58.79          | 500.0              | 100.0           | 168.0       | Н   | 12.0          | -76.6         |  |  |

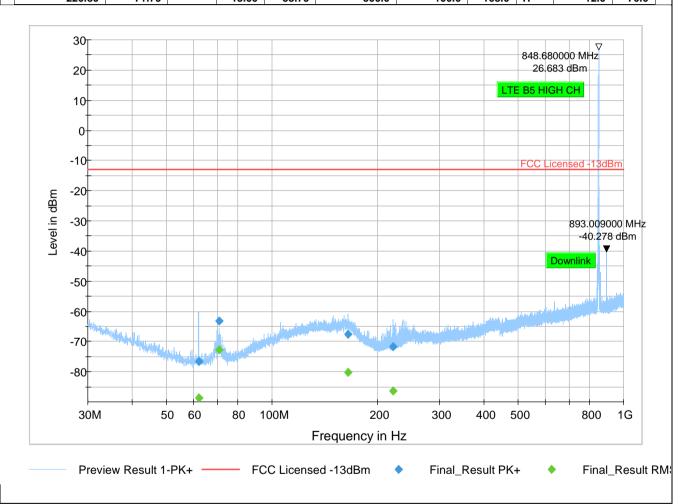

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 46 of 63



| _ |           |         |        |        |        |            |           |        |     |         |       |  |  |
|---|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|--|--|
|   | Plot # 30 |         |        |        |        |            |           |        |     |         |       |  |  |
|   | Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |  |  |
|   | (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |  |  |
|   | 1009.75   |         | -70.72 |        |        | 500.0      | 1000.0    | 242.0  | Н   | 58.0    | -93.0 |  |  |
|   | 1009.75   | -41.43  |        | -13.00 | 28.43  | 500.0      | 1000.0    | 242.0  | Н   | 58.0    | -93.0 |  |  |
|   | 1056.25   | -58.13  |        | -13.00 | 45.13  | 500.0      | 1000.0    | 193.0  | Н   | 291.0   | -93.3 |  |  |
|   | 1056.25   |         | -70.34 |        |        | 500.0      | 1000.0    | 193.0  | Н   | 291.0   | -93.3 |  |  |
|   | 1697.25   | -50.18  |        | -13.00 | 37.18  | 500.0      | 1000.0    | 100.0  | Н   | 275.0   | -91.5 |  |  |
|   | 1697.25   |         | -66.08 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 275.0   | -91.5 |  |  |
|   | 2247.75   |         | -54.25 |        |        | 500.0      | 1000.0    | 134.0  | Н   | 153.0   | -89.3 |  |  |
|   | 2247.75   | -46.63  |        | -13.00 | 33.63  | 500.0      | 1000.0    | 134.0  | Н   | 153.0   | -89.3 |  |  |
|   | 2375.50   | -47.07  |        | -13.00 | 34.07  | 500.0      | 1000.0    | 125.0  | Н   | 339.0   | -89.0 |  |  |
|   | 2375.50   |         | -55.77 |        |        | 500.0      | 1000.0    | 125.0  | Н   | 339.0   | -89.0 |  |  |
| ı | 2503.75   | -45.19  |        | -13.00 | 32.19  | 500.0      | 1000.0    | 159.0  | Н   | 140.0   | -88.7 |  |  |
| ı | 2503.75   |         | -52.27 |        |        | 500.0      | 1000.0    | 159.0  | Н   | 140.0   | -88.7 |  |  |
| ı | 2632.25   |         | -55.77 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 320.0   | -88.3 |  |  |
| 1 | 2622.25   | 47 EE   |        | 42.00  | 24 55  | E00.0      | 4000.0    | 400.0  | ы   | 220.0   | 00.2  |  |  |

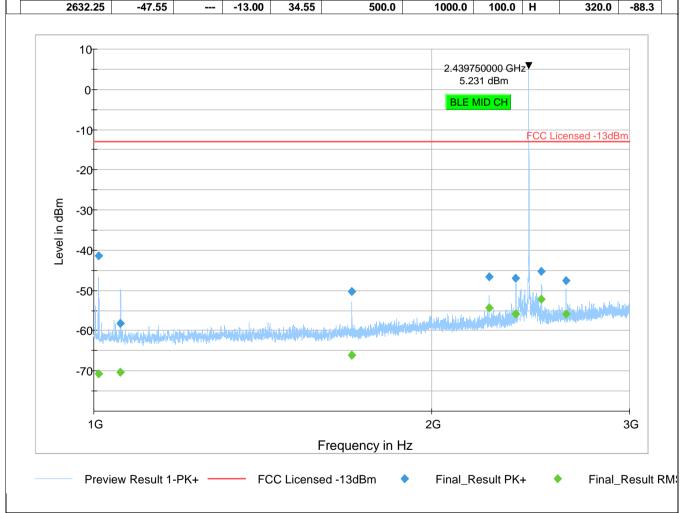


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 47 of 63



|        | lot # 31   |
|--------|------------|
| Margin | Meas. Time |

| Plot # 31 |         |        |        |        |            |           |        |     |         |        |  |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |  |
| 3288.25   | -32.17  | -      | -13.00 | 19.17  | 500.0      | 1000.0    | 125.0  | Н   | 276.0   | -103.2 |  |  |
| 3288.25   |         | -52.91 |        |        | 500.0      | 1000.0    | 125.0  | Н   | 276.0   | -103.2 |  |  |
| 4031.25   | -38.85  | -      | -13.00 | 25.85  | 500.0      | 1000.0    | 237.0  | ٧   | 224.0   | -100.1 |  |  |
| 4031.25   |         | -58.05 |        |        | 500.0      | 1000.0    | 237.0  | ٧   | 224.0   | -100.1 |  |  |
| 7320.75   |         | -53.29 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 107.0   | -95.6  |  |  |
| 7320.75   | -42.90  | I      | -13.00 | 29.90  | 500.0      | 1000.0    | 100.0  | Н   | 107.0   | -95.6  |  |  |

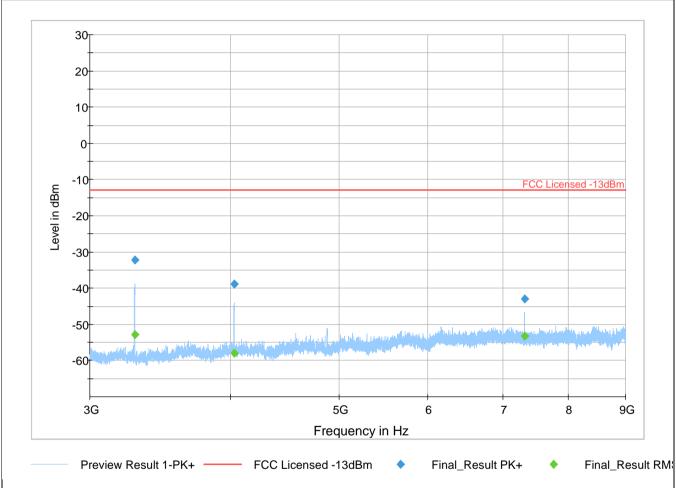

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X

**Celecom** 

Date of Report

Frequency (MHz)

161.27

MaxPeak

(dBm)

RMS

(dBm)


-79.77

2023-03-24 Page 48 of 63

Limit

(dBm)


| P              | lot # 32           |                 |                |     |               |               |
|----------------|--------------------|-----------------|----------------|-----|---------------|---------------|
| Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height<br>(cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |
|                | 500.0              | 100.0           | 275.0          | ٧   | 47.0          | -68.8         |

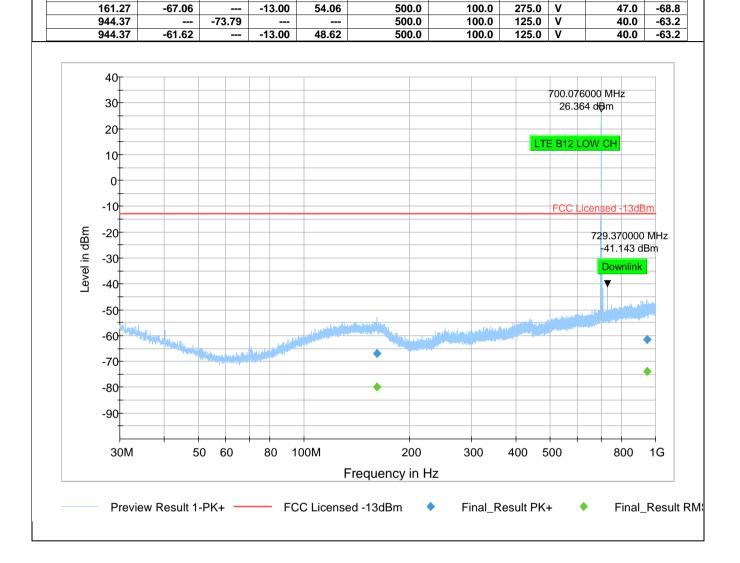

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 49 of 63



| Plot # 33 |         |        |        |        |            |           |        |     |         |       |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |
| 1394.25   |         | -57.55 |        |        | 500.0      | 1000.0    | 116.0  | Н   | -36.0   | -66.4 |
| 1394.25   | -42.98  |        | -13.00 | 29.98  | 500.0      | 1000.0    | 116.0  | Н   | -36.0   | -66.4 |
| 1411.50   |         | -54.68 |        |        | 500.0      | 1000.0    | 151.0  | Н   | 63.0    | -66.4 |
| 1411.50   | -37.87  |        | -13.00 | 24.87  | 500.0      | 1000.0    | 151.0  | Н   | 63.0    | -66.4 |
| 2117.50   |         | -51.06 |        |        | 500.0      | 1000.0    | 117.0  | Н   | 36.0    | -63.4 |
| 2117.50   | -34.76  |        | -13.00 | 21.76  | 500.0      | 1000.0    | 117.0  | Н   | 36.0    | -63.4 |

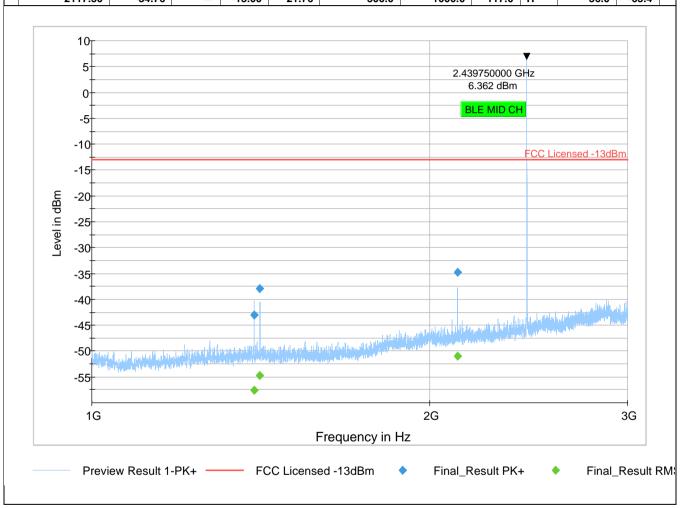

Frequency

(MHz)

4880.00

4880.00

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 50 of 63

-13.00

33.49

-52.38

-46.49

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X

1000.0

1000.0

107.0 H

107.0 H



295.0

295.0

Corr.

(dB)

-103.1

-103.1

-99.3

-99.3


-99.0

-99.0

|                 |                  |              |                | P              | lot # 34           |                 |             |     |               |
|-----------------|------------------|--------------|----------------|----------------|--------------------|-----------------|-------------|-----|---------------|
| quency<br>//Hz) | MaxPeak<br>(dBm) | RMS<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) |
| 3140.10         | ·                | -53.58       |                |                | 500.0              | 1000.0          | 150.0       | Н   | 293.0         |
| 3140.10         | -38.59           | -            | -13.00         | 25.59          | 500.0              | 1000.0          | 150.0       | Н   | 293.0         |
| 4179.70         |                  | -61.43       | -              |                | 500.0              | 1000.0          | 117.0       | ٧   | 92.0          |
| 4179.70         | -46.54           |              | -13.00         | 33.54          | 500.0              | 1000.0          | 117.0       | ٧   | 92.0          |

500.0

500.0

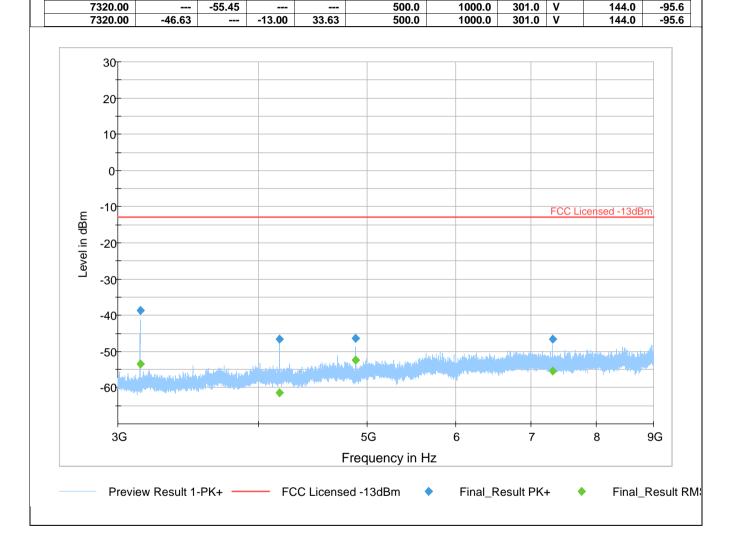


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 51 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Plot # 35 Frequency (MHz) Margin (dB) Corr. (dB) RMS MaxPeak Limit Meas. Time Bandwidth Height Pol Azimuth (dBm) (dBm) (dBm) (kHz) (ms) (cm) (deg)

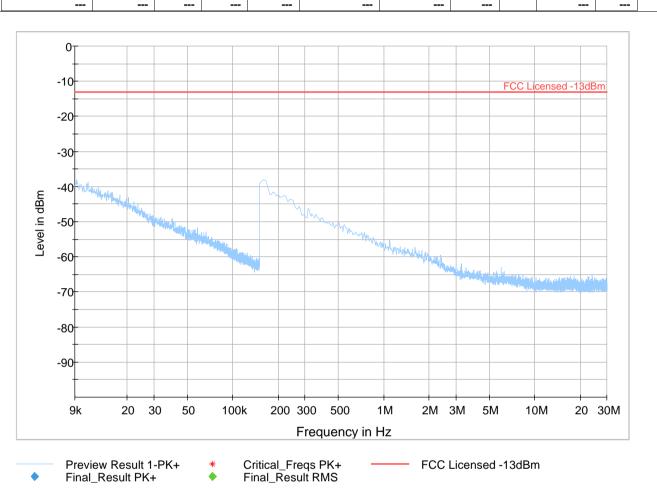

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

Limit

(dBm)

-13.00

FCC ID: 2AEMI-BRN404X

celecom IC: 20127-BRN404X

Date of Report

Frequency (MHz)

334.10

334.10

2023-03-24

RMS

(dBm)

-84.61


MaxPeak

(dBm)

-71.71

Page 52 of 63


| Р              | lot # 36           |                 |             |     |               |               |  |
|----------------|--------------------|-----------------|-------------|-----|---------------|---------------|--|
| Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr.<br>(dB) |  |
|                | 500.0              | 100.0           | 226.0       | Н   | -84.0         | -73.4         |  |
| 58.71          | 500.0              | 100.0           | 226.0       | Н   | -84.0         | -73.4         |  |
|                | 500.0              | 100.0           | 107.0       | V   | 106.0         | 62.6          |  |

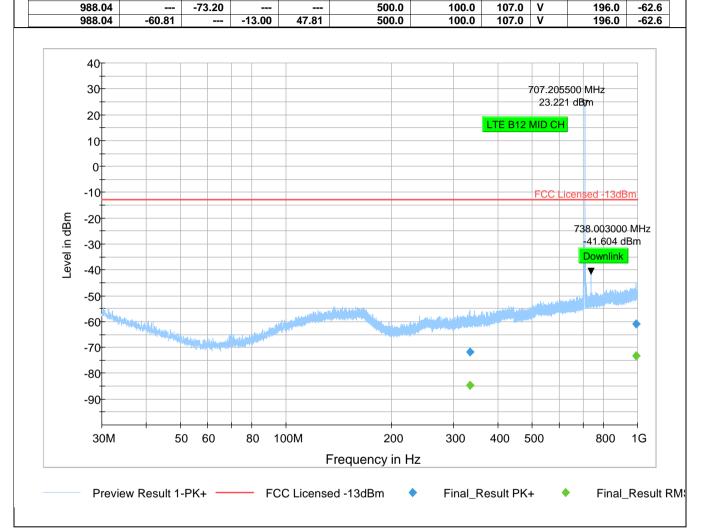

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 53 of 63



|   | Plot # 37 |         |        |        |        |            |           |        |     |         |       |
|---|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|
|   | Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |
|   | (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |
|   | 1406.75   |         | -54.61 |        |        | 500.0      | 1000.0    | 142.0  | Н   | 59.0    | -66.4 |
|   | 1406.75   | -36.47  |        | -13.00 | 23.47  | 500.0      | 1000.0    | 142.0  | Н   | 59.0    | -66.4 |
|   | 1423.75   |         | -53.44 |        |        | 500.0      | 1000.0    | 107.0  | Н   | 225.0   | -66.4 |
|   | 1423.75   | -36.72  |        | -13.00 | 23.72  | 500.0      | 1000.0    | 107.0  | Н   | 225.0   | -66.4 |
|   | 2110.00   |         | -52.02 |        |        | 500.0      | 1000.0    | 142.0  | Н   | -1.0    | -63.5 |
|   | 2110.00   | -28.02  |        | -13.00 | 15.02  | 500.0      | 1000.0    | 142.0  | Н   | -1.0    | -63.5 |
|   | 2135.50   |         | -50.04 |        |        | 500.0      | 1000.0    | 134.0  | Н   | 202.0   | -63.4 |
|   | 2135.50   | -32.78  |        | -13.00 | 19.78  | 500.0      | 1000.0    | 134.0  | Н   | 202.0   | -63.4 |
|   | 2376.25   |         | -50.72 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 112.0   | -62.5 |
|   | 2376.25   | -39.57  |        | -13.00 | 26.57  | 500.0      | 1000.0    | 100.0  | Н   | 112.0   | -62.5 |
|   | 2698.25   |         | -51.50 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 346.0   | -61.4 |
| 1 | 2000 25   | 20.04   |        | 42.00  | 20.04  | F00 0      | 4000 0    | 4000   | ш   | 240.0   | C4 4  |

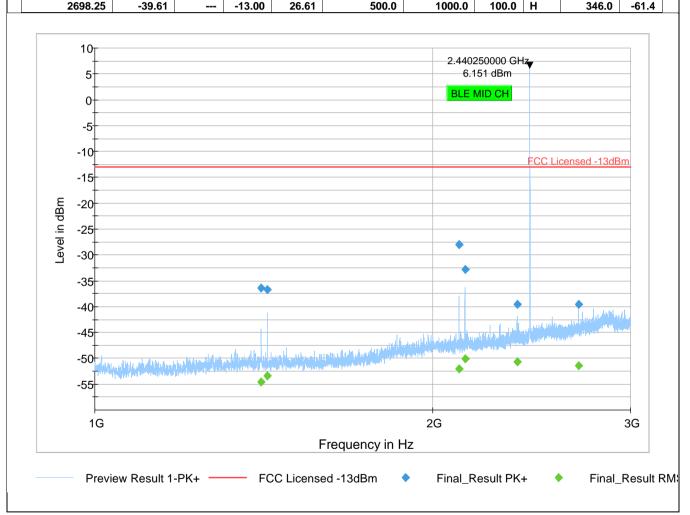


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 54 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



## Plot # 38

|           |         |        |        | Г      | 101 # 30   |           |        |     |         |        |   |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|---|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |   |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   | 1 |
| 3147.80   |         | -52.98 |        |        | 500.0      | 1000.0    | 176.0  | Н   | 155.0   | -103.0 | 1 |
| 3147.80   | -38.01  | -      | -13.00 | 25.01  | 500.0      | 1000.0    | 176.0  | Н   | 155.0   | -103.0 | ı |
| 4171.90   |         | -54.81 |        |        | 500.0      | 1000.0    | 134.0  | Н   | 253.0   | -99.3  | 1 |
| 4171.90   | -39.51  |        | -13.00 | 26.51  | 500.0      | 1000.0    | 134.0  | Н   | 253.0   | -99.3  | ı |
| 4879.80   |         | -52.21 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 293.0   | -99.0  | ı |
| 4879.80   | -46.85  |        | -13.00 | 33.85  | 500.0      | 1000.0    | 100.0  | Н   | 293.0   | -99.0  | ı |
| 7319.90   |         | -49.44 |        |        | 500.0      | 1000.0    | 117.0  | ٧   | 268.0   | -95.6  | 1 |
| 7319.90   | -44.04  | -      | -13.00 | 31.04  | 500.0      | 1000.0    | 117.0  | ٧   | 268.0   | -95.6  | ı |

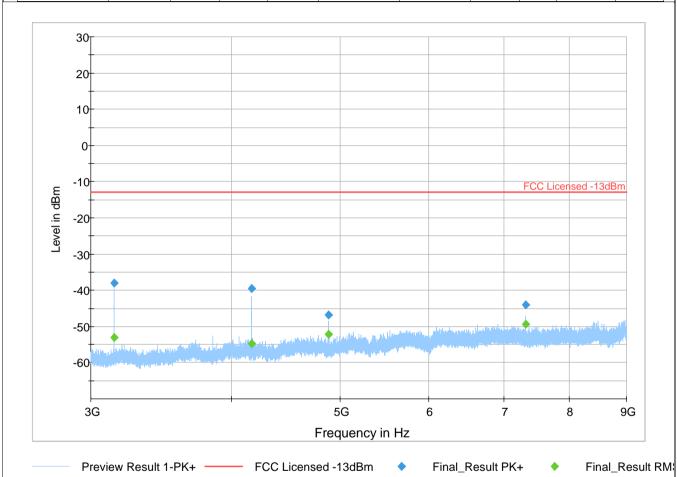

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X




Date of Report

2023-03-24

Page 55 of 63

IC: 20127-BRN404X


|   | Plot # 39 |         |        |        |        |            |           |        |     |         |       |
|---|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|
|   | Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |
|   | (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |
|   | 238.43    |         | -72.21 |        |        | 500.0      | 100.0     | 116.0  | Н   | 289.0   | -75.0 |
|   | 238.43    | -50.48  |        | -13.00 | 37.48  | 500.0      | 100.0     | 116.0  | Н   | 289.0   | -75.0 |
| Ī | 954.14    |         | -70.12 |        |        | 500.0      | 100.0     | 225.0  | ٧   | 158.0   | -62.9 |
|   | 954.14    | -41.37  |        | -13.00 | 28.37  | 500.0      | 100.0     | 225.0  | V   | 158.0   | -62.9 |

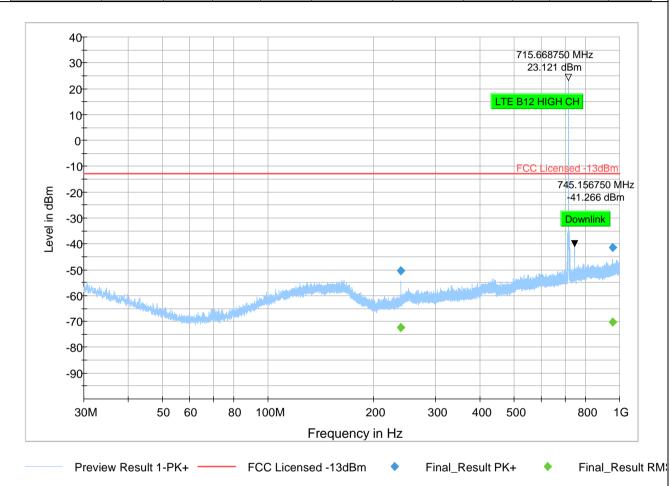

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 56 of 63



| Plot # 40 |         |        |        |        |            |           |        |     |         |       |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|-------|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr. |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)  |  |
| 1431.25   |         | -57.07 |        |        | 500.0      | 1000.0    | 249.0  | ٧   | 92.0    | -66.4 |  |
| 1431.25   | -42.36  |        | -13.00 | 29.36  | 500.0      | 1000.0    | 249.0  | ٧   | 92.0    | -66.4 |  |
| 2134.00   |         | -50.63 |        |        | 500.0      | 1000.0    | 125.0  | Н   | 28.0    | -63.4 |  |
| 2134.00   | -25.43  |        | -13.00 | 12.43  | 500.0      | 1000.0    | 125.0  | Н   | 28.0    | -63.4 |  |
| 2147.00   |         | -49.95 |        |        | 500.0      | 1000.0    | 137.0  | Н   | 1.0     | -63.4 |  |
| 2147.00   | -33.20  |        | -13.00 | 20.20  | 500.0      | 1000.0    | 137.0  | Н   | 1.0     | -63.4 |  |
| 2866.75   |         | -50.02 |        |        | 500.0      | 1000.0    | 142.0  | Н   | 286.0   | -60.6 |  |
| 2866.75   | -37.94  |        | -13.00 | 24.94  | 500.0      | 1000.0    | 142.0  | Н   | 286.0   | -60.6 |  |

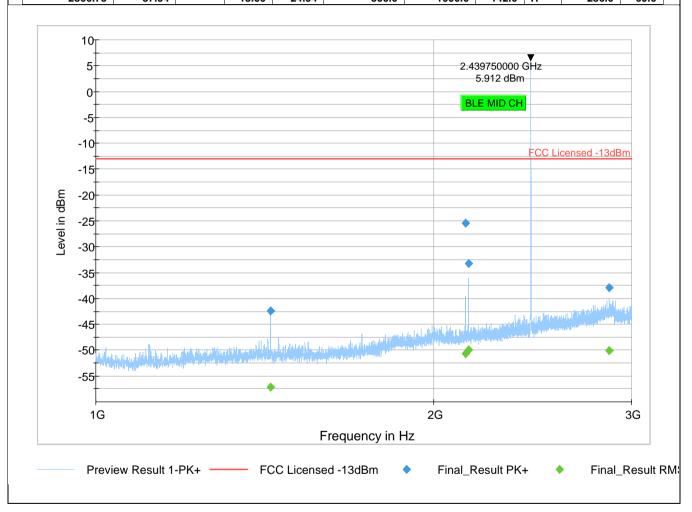


EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 57 of 63



| P | lot | # | 4 | 1 |
|---|-----|---|---|---|
|   |     |   |   | 1 |

|           |         |        |        | P      | 10t # 41   |           |        |     |         |        |  |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|--|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |  |
| 3154.70   |         | -53.40 |        |        | 500.0      | 1000.0    | 107.0  | Н   | 303.0   | -102.9 |  |
| 3154.70   | -36.14  |        | -13.00 | 23.14  | 500.0      | 1000.0    | 107.0  | Н   | 303.0   | -102.9 |  |
| 4164.20   |         | -54.69 |        |        | 500.0      | 1000.0    | 100.0  | Н   | 253.0   | -99.3  |  |
| 4164.20   | -39.36  |        | -13.00 | 26.36  | 500.0      | 1000.0    | 100.0  | Н   | 253.0   | -99.3  |  |
| 4880.00   |         | -55.16 |        |        | 500.0      | 1000.0    | 143.0  | Н   | 102.0   | -99.0  |  |
| 4880.00   | -48.49  |        | -13.00 | 35.49  | 500.0      | 1000.0    | 143.0  | Н   | 102.0   | -99.0  |  |
| 6337.90   |         | -61.23 |        |        | 500.0      | 1000.0    | 291.0  | Н   | 318.0   | -95.7  |  |
| 6337.90   | -49.26  |        | -13.00 | 36.26  | 500.0      | 1000.0    | 291.0  | Н   | 318.0   | -95.7  |  |
| 7320.00   |         | -48.90 |        |        | 500.0      | 1000.0    | 134.0  | Н   | 127.0   | -95.6  |  |
| 7320.00   | -43.21  |        | -13.00 | 30.21  | 500.0      | 1000.0    | 134.0  | Н   | 127.0   | -95.6  |  |

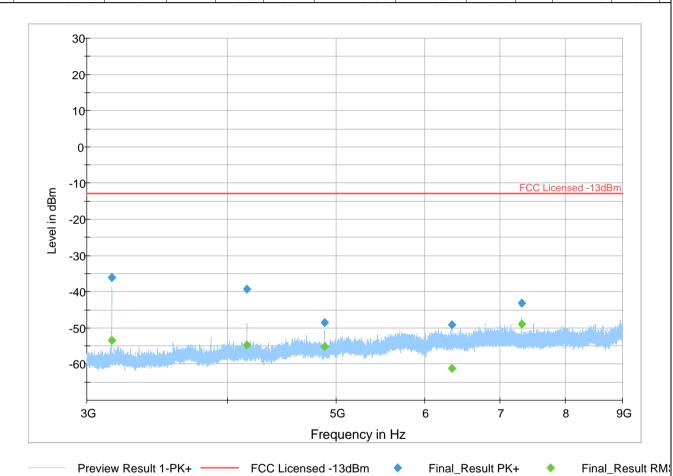

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24


FCC ID: 2AEMI-BRN404X



Date of Report

Page 58 of 63

IC: 20127-BRN404X

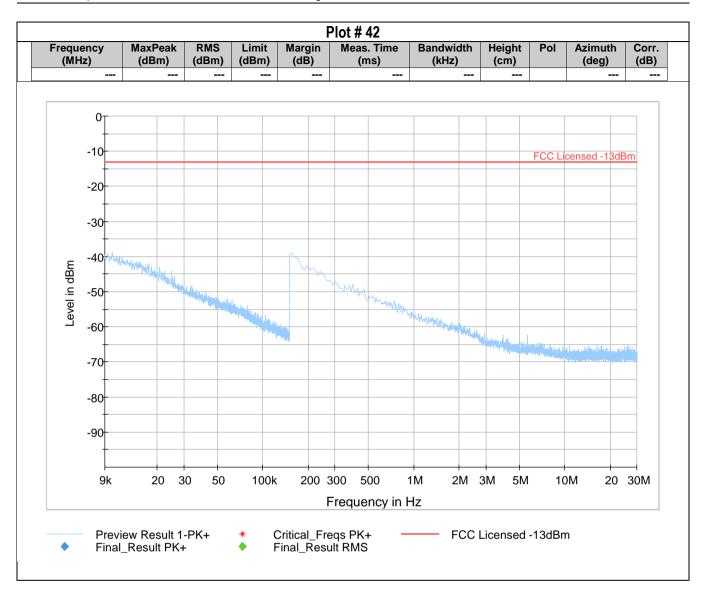

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

Limit

(dBm)

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X



Date of Report

Frequency (MHz) 2023-03-24

RMS

(dBm)


MaxPeak

(dBm)

Page 59 of 63

Plot # 43

Margin Meas. Time Bandwidth Height Pol Azimuth Corr.
(dB) (ms) (kHz) (cm) (deg) (dB)

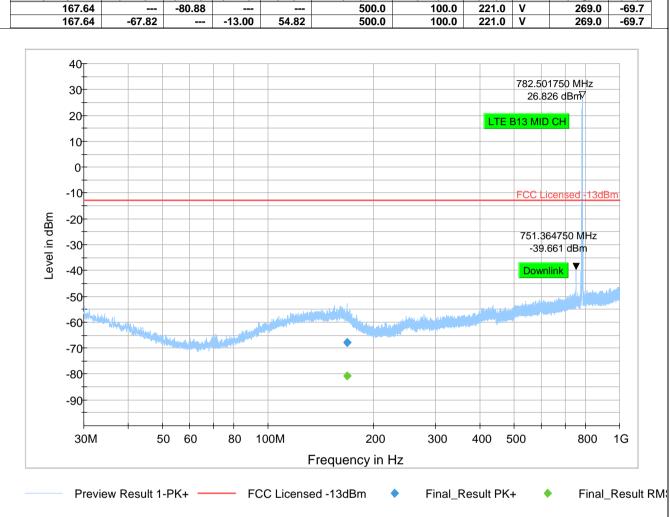

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 60 of 63

FCC ID: 2AEMI-BRN404X IC: 20127-BRN404X




Plot # 44 Frequency (MHz) Margin (dB) Corr. (dB) MaxPeak RMS Limit Meas. Time Bandwidth Height Pol Azimuth (dBm) (dBm) (kHz) (dBm) (ms) (cm) (deg) 10 2.439750000 **C**Hz 5-5.945 dBm 0-BLE MID CH -5 -10 FCC Licensed -13dBm -15 Level in dBm -20 -25 -30 -35 -40 -45 -50 -55 1G 2G 3G Frequency in Hz Critical\_Freqs PK+ FCC Licensed -13dBm Preview Result 1-PK+ Final\_Result PK+ Final\_Result RMS

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2 2023-03-24 Page 61 of 63



|           |         |        |        | P      | Plot # 45  |           |        |     |         |        |
|-----------|---------|--------|--------|--------|------------|-----------|--------|-----|---------|--------|
| Frequency | MaxPeak | RMS    | Limit  | Margin | Meas. Time | Bandwidth | Height | Pol | Azimuth | Corr.  |
| (MHz)     | (dBm)   | (dBm)  | (dBm)  | (dB)   | (ms)       | (kHz)     | (cm)   |     | (deg)   | (dB)   |
| 3221.50   |         | -46.14 |        |        | 500.0      | 1000.0    | 120.0  | Н   | 74.0    | -102.3 |
| 3221.50   | -27.49  |        | -13.00 | 14.49  | 500.0      | 1000.0    | 120.0  | Н   | 74.0    | -102.3 |
| 3908.00   |         | -63.51 |        |        | 500.0      | 1000.0    | 117.0  | Н   | 235.0   | -100.8 |
| 3908.00   | -45.58  |        | -13.00 | 32.58  | 500.0      | 1000.0    | 117.0  | Н   | 235.0   | -100.8 |
| 4098.40   |         | -53.03 |        |        | 500.0      | 1000.0    | 160.0  | Н   | 164.0   | -99.5  |
| 4098.40   | -35.12  |        | -13.00 | 22.12  | 500.0      | 1000.0    | 160.0  | Н   | 164.0   | -99.5  |
| 7319.90   |         | -46.81 |        |        | 500.0      | 1000.0    | 107.0  | Н   | 308.0   | -95.6  |
| 7319.90   | -42.27  |        | -13.00 | 29.27  | 500.0      | 1000.0    | 107.0  | Н   | 308.0   | -95.6  |

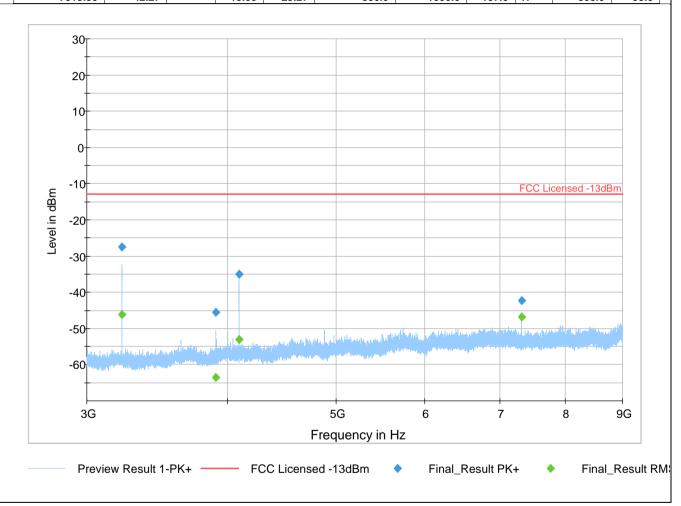

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

Page 62 of 63

FCC ID: 2AEMI-BRN404X

IC: 20127-BRN404X



## 9 Test setup photos

Setup photos are included in supporting file name: "EMC\_PARTI-001-21001\_FCC\_Setup\_Photos"

## 10 Test Equipment And Ancillaries Used For Testing

2023-03-24

| Equipment Type        | Manufacturer    | Model              | Serial #  | Calibration Cycle | Last Calibration Date |
|-----------------------|-----------------|--------------------|-----------|-------------------|-----------------------|
| ACTIVE LOOP ANTENNA   | ETS LINDGREN    | 6507               | 00161344  | 3 YEARS           | 10/30/2020            |
| BILOG ANTENNA         | ETS.LINDGREN    | 3142E              | 00166067  | 3 YEARS           | 10/21/2021            |
| HORN ANTENNA          | EMCO            | 3115               | 00035111  | 3 YEARS           | 09/30/2021            |
| HORN ANTENNA          | ETS.LINDGREN    | 3117               | 00215984  | 3 YEARS           | 01/31/2021            |
| HORN ANTENNA          | ETS.LINDGREN    | 3116               | 00070497  | 3 YEARS           | 11/23/2020            |
| TEST RECEIVER         | R&S             | ESU40              | 100251    | 3 YEARS           | 09/13/2021            |
| PULSE LIMITER         | R&S             | 20db Pulse Limiter | 102473    | 3 YEARS           | 8/25/2020             |
| WIDEBAND COMM. TESTER | R&S             | CMW 500            | 109825    | 3 YEARS           | 09/23/2020            |
| DIGITAL THRMOMETER    | CONTROL COMPANY | 36934-164          | 181230565 | 3 YEARS           | 10/20/2021            |

**Note:** Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

EMC\_PARTI-001-21001\_FCC\_22\_24\_27\_Rev2

FCC ID: 2AEMI-BRN404X

Date of Report

2023-03-24

Page 63 of 63

IC: 20127-BRN404X



## 11 Revision History

| Date       | Report Name                           | Changes to report                                   | Prepared by |
|------------|---------------------------------------|---|-------------|
| 2022-11-28 | EMC_PARTI-001-21001_FCC_22_24_27      | Initial Version                                     | Cheng Song  |
| 2023-02-28 | EMC_PARTI-001-21001_FCC_22_24_27_Rev1 | Updated section 6<br>Measurement<br>Results Summary | Cheng Song  |
| 2023-03-24 | EMC_PARTI-001-21001_FCC_22_24_27_Rev2 | Added section 7 Reference                           | Cheng Song  |