

TEST REPORT

Applicant: Particle Industries, Inc.

EUT Description: M-SoM LTE-M/2G/Satellite + Wi-Fi for Global

Model: M635e

Brand: Particle

IC: 20127-M635

Standards: RSS-Gen Issue 5

RSS-130 Issue 2

RSS-132 Issue 4

RSS-133 Issue 7

RSS-139 Issue 4

RSS-170 Issue 4

Date of Receipt: 2026/05/14

Date of Test: 2026/05/14 to 2026/06/17

Date of Issue: 2026/06/17

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



Jim Huang
Approved By:



Carey Chen
Reviewed By:

Revision History

Rev.	Issue Date	Description	Revised by
01	2026/06/17	Original	Carey Chen

Summary of Test Results

ISED Part	Test Band	Test Item	Test Result
RSS-Gen, §6.12; RSS-132, §5.4 RSS-130, §4.6.3	GSM850/LTE Band 5/26 LTE Band 12/13/85	Effective Radiated Power	Pass*
RSS-Gen, §6.12; RSS-133, §5.5 RSS-139, §5.5	GSM1900/LTE Band 2/25 LTE Band 4/66	Effective Isotropic Radiated Power	
RSS-132, §5.4 RSS-133, §5.5 RSS-139, §5.5 RSS-130, §4.6.1	GSM850/LTE Band 5/26 GSM1900/LTE Band 2/25 LTE Band 4/66 LTE Band 12/13/85	Peak-Average Ratio	Reference report SZCR240600220202
RSS-Gen, §6.7 RSS-133, §5.2	All Band GSM1900/LTE Band 2/25	Occupied Bandwidth	
RSS-Gen, §6.13; RSS-132, §5.5 RSS-133, §5.6 RSS-139, §5.6 RSS-130, §4.7	GSM850/LTE Band 5/26 GSM1900/LTE Band 2/25 LTE Band 4/66 LTE Band 12/13/85	Band Edge	
RSS-Gen, §6.13; RSS-132, §5.5 RSS-133, §5.6 RSS-139, §5.6 RSS-130, §4.7	GSM850/LTE Band 5/26 GSM1900/LTE Band 2/25 LTE Band 4/66 LTE Band 12/13/85	Spurious Emission at Antenna Terminals	
RSS-Gen, §6.11 RSS-132, §5.3 RSS-133, §5.4 RSS-139, §5.4 RSS-130, §4.5	GSM850/LTE Band 5/26 GSM1900/LTE Band 2/25 LTE Band 4/66 LTE Band 12/13/85	Frequency Stability	
RSS-Gen, §6.13; RSS-132, §5.5 RSS-133, §5.6 RSS-139, §5.6 RSS-130, §4.7	GSM850/LTE Band 5/26 GSM1900/LTE Band 2/25 LTE Band 4/66 LTE Band 12/13/85	Field Strength of Spurious Radiation	Pass
Remark: 1. Pass: Meet the requirement. 2. Pass*: Only the power for GSM 1900 was tested. The items of power data for other Bands refer to the previous report, updated the ERP/EIRP and only the maximum power of all frequency bands displayed in this report.			

ISED Part	Test Band	Test Item	Test Result
RSS-170 §5.5	NTN Band 23/255	Effective Isotropic Radiated Power	Pass*
RSS-Gen §6.7	NTN Band 23/255	Occupied Bandwidth	Reference report FYCR241200002101
RSS-170 §5.8	NTN Band 23/255	Emission Mask	
RSS-170 §5.8	NTN Band 23/255	Conducted Spurious emissions	
RSS-170 §5.3	NTN Band 23/255	Frequency Stability	
RSS-170 §5.9	NTN Band 23/255	Additional unwanted emission limits for MESs	
RSS-170 §5.8	NTN Band 23/255	Field Strength of Spurious Radiation	Pass
Remark: 1. Pass: Meet the requirement. 2. Pass*: The items of power data refer to the previous report, updated the EIRP and only the maximum power of all frequency bands displayed in this report.			

Remark:

Review this report and original report, this report also updates the following standard:

Original report standard:	The newest report standard:
RSS-133 Issue 6	RSS-133 Issue 7

In this report the power for GSM 1900 and Field Strength of Spurious Radiation was tested, and the other data please refer to the previous report with report number SZCR240600220202 (IC: 10224A-02406BG95S5) issued by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch and FYCR241200002101 (IC: 10224A-02406BG95S5) issued by Compliance Certification Services (Kunshan) Inc. Shenzhen Branch.

Table of Contents

1	General Description	6
1.1	Lab Information	6
1.1.1	Testing Location	6
1.1.2	Test Facility / Accreditations	6
1.2	Client Information	6
1.2.1	Applicant.....	6
1.2.2	Manufacturer.....	6
1.3	Product Information.....	7
2	Test Configuration	9
2.1	Test Channel	9
2.2	Test Mode	13
2.3	Support Unit used in test	13
2.4	Test Environment.....	13
2.5	Test RF Cable	13
2.6	Modifications.....	13
2.7	Test Setup Diagram	14
2.7.1	Conducted Configuration.....	14
2.7.2	Radiated Configuration	15
3	Equipment and Measurement Uncertainty.....	16
3.1	Test Equipment List.....	16
3.2	Measurement Uncertainty	17
4	Test results	18
4.1	Output Power (ERP / EIRP / Conducted Power)	18
4.2	Field Strength of Spurious Radiation.....	19
5	Test Setup Photos.....	21
	Appendix.....	22

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory.

Test Firm Registration Number: 684095

Designation Number: CN1353.

ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

1.2 Client Information

1.2.1 Applicant

Applicant:	Particle Industries, Inc.
Address:	548 Market St, PMB 34833, San Francisco, CA 94104, USA

1.2.2 Manufacturer

Manufacturer:	Particle Industries, Inc.
Address:	548 Market St, PMB 34833, San Francisco, CA 94104, USA

1.3 Product Information

EUT Description:	M-SoM LTE-M/2G/Satellite + Wi-Fi for Global		
Model/HVIN:	M635e		
PMN:	M-Series LTE M1/2G/Satellite		
Brand:	Particle		
Hardware Version:	v0.2		
Software Version/FVIN:	v6.4.1		
IMEI:	862063070036368		
Device Capabilities:			
Modulation Type:	GSM:	☒ GSM/GPRS: GMSK, ☒ EGPRS: 8PSK	
	LTE Cat M1:	☒ QPSK, ☒ 16QAM	
	NTN:	☒ BPSK, ☒ QPSK	
Operation Frequency Range:	Band	TX Frequency	RX Frequency
	GSM 850	824 ~ 849 MHz	869 ~ 894 MHz
	PCS 1900	1850 ~ 1910 MHz	1930 ~ 1990 MHz
	Cat M1 Band 2	1850 ~ 1910 MHz	1930 ~ 1990 MHz
	Cat M1 Band 4	1710 ~ 1755 MHz	2110 ~ 2155 MHz
	Cat M1 Band 5	824 ~ 849 MHz	869 ~ 894 MHz
	Cat M1 Band 12	699 ~ 716 MHz	729 ~ 746 MHz
	Cat M1 Band 13	777 ~ 787 MHz	746 ~ 756 MHz
	Cat M1 Band 25	1850 ~ 1915 MHz	1930 ~ 1995 MHz
	Cat M1 Band 26	824 ~ 849 MHz	869 ~ 894 MHz
	Cat M1 Band 66	1710 ~ 1780 MHz	2110 ~ 2180 MHz
	Cat M1 Band 85	698 ~ 716 MHz	728 ~ 746 MHz
	NTN Band 23	2000 ~ 2020 MHz	2180 ~ 2200 MHz
	NTN Band 255	1626.5 ~ 1660.5 MHz	1525 ~1559 MHz
Power Class:	Class 3: All		
Antenna Type:	Internal: Dipole Antenna External: Omnidirectional Antenna		
Antenna Gain:	Band	Ant1 Internal (dBi)	Ant4 External (dBi)
	GSM 850	1.78	2.01
	PCS 1900	5.3	1.26
	Cat M1 Band 2	5.3	1.26
	Cat M1 Band 4	3.74	1.15
	Cat M1 Band 5	1.78	2.01
	Cat M1 Band 12	2.17	1.77
	Cat M1 Band 13	2.74	1.51
	Cat M1 Band 25	5.3	1.26
	Cat M1 Band 26	1.18	2.01
	Cat M1 Band 66	3.74	1.15
	Cat M1 Band 85	2.17	1.75
	NTN Band 23	4.37	3

	NTN Band 255	3.91	1.2
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user manual for more detailed description.			

2 Test Configuration

2.1 Test Channel

Band	TX Frequency			RX Frequency		
	Range	Channel	Frequency	Range	Channel	Frequency
GSM 850	Low	128	824.2 MHz	Low	128	869.2 MHz
	Middle	190	836.6 MHz	Middle	190	881.6 MHz
	High	251	848.8 MHz	High	251	893.8 MHz
PCS 1900	Low	512	1850.2MHz	Low	512	1930.2 MHz
	Middle	661	1880.0 MHz	Middle	661	1960.0 MHz
	High	810	1909.8 MHz	High	810	1989.8 MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
LTE Cat M1 Band 2	1.4MHz	Low	18607	1850.7 MHz	Low	607	1930.7 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19193	1909.3 MHz	High	1193	1989.3 MHz
	3MHz	Low	18615	1851.5 MHz	Low	615	1931.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19185	1908.5 MHz	High	1185	1988.5 MHz
	5MHz	Low	18625	1852.5 MHz	Low	625	1932.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19175	1907.5 MHz	High	1175	1987.5 MHz
	10MHz	Low	18650	1855 MHz	Low	650	1935 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19150	1905 MHz	High	1150	1985 MHz
	15MHz	Low	18675	1857.5 MHz	Low	675	1937.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19125	1902.5 MHz	High	1125	1982.5 MHz
	20MHz	Low	18700	1860 MHz	Low	700	1940 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19100	1900 MHz	High	1100	1980 MHz
LTE Cat M1 Band 4	1.4MHz	Low	19957	1710.7 MHz	Low	1957	2110.7 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20393	1754.3 MHz	High	2393	2154.3 MHz
	3MHz	Low	19965	1711.5 MHz	Low	1965	2111.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20385	1753.5 MHz	High	2385	2153.5 MHz
	5MHz	Low	19975	1712.5 MHz	Low	1975	2112.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20375	1752.5 MHz	High	2375	2152.5 MHz
	10MHz	Low	20000	1715 MHz	Low	2115	2115 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20350	1750 MHz	High	2350	2150 MHz
	15MHz	Low	20025	1717.5 MHz	Low	2025	2117.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
	20MHz	High	20325	1747.5 MHz	High	2325	2147.5 MHz
		Low	20050	1720 MHz	Low	2050	2120 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20300	1745 MHz	High	2300	2145 MHz
LTE Cat M1 Band 5	1.4MHz	Low	20407	824.7 MHz	Low	2407	869.7 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20643	848.3 MHz	High	2643	893.3 MHz
	3MHz	Low	20415	825.5 MHz	Low	2415	870.5 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20635	847.5 MHz	High	2635	892.5 MHz
	5MHz	Low	20425	826.5 MHz	Low	2425	871.5 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20625	846.5 MHz	High	2625	891.5 MHz
	10MHz	Low	20450	829 MHz	Low	2450	874 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20600	844 MHz	High	2600	889 MHz
LTE Cat M1 Band 12	1.4MHz	Low	23017	699.7 MHz	Low	5017	729.7 MHz
		Middle	23095	707.5 MHz	Middle	5095	737.5 MHz
		High	23173	715.3 MHz	High	5173	745.3 MHz
	3MHz	Low	23025	700.5 MHz	Low	5025	730.5 MHz
		Middle	23095	707.5 MHz	Middle	5095	737.5 MHz
		High	23165	714.5 MHz	High	5165	744.5 MHz
	5MHz	Low	23035	701.5 MHz	Low	5035	731.5 MHz
		Middle	23095	707.5 MHz	Middle	5095	737.5 MHz
		High	23155	713.5 MHz	High	5155	743.5 MHz
	10MHz	Low	23060	704 MHz	Low	5060	734 MHz
		Middle	23095	707.5 MHz	Middle	5095	737.5 MHz
		High	23130	711 MHz	High	5130	741 MHz
LTE Cat M1 Band 13	5MHz	Low	23205	779.5 MHz	Low	5205	748.5 MHz
		Middle	23230	782 MHz	Middle	5230	751 MHz
		High	23255	784.5 MHz	High	5255	753.5 MHz
	10MHz	Low	23230	782 MHz	Low	5230	751 MHz
		Middle	23230	782 MHz	Middle	5230	751 MHz
		High	23230	782 MHz	High	5230	751 MHz
LTE Cat M1 Band 25	1.4MHz	Low	26047	1850.7 MHz	Low	8047	1930.7 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26683	1914.3 MHz	High	8683	1994.3 MHz
	3MHz	Low	26055	1851.5 MHz	Low	8055	1931.5 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26675	1913.5 MHz	High	8675	1993.5 MHz
	5MHz	Low	26065	1852.5 MHz	Low	8065	1932.5 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26665	1912.5 MHz	High	8665	1992.5 MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
	10MHz	Low	26090	1855 MHz	Low	8090	1935 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26640	1910 MHz	High	8640	1990 MHz
	15MHz	Low	26115	1857.5 MHz	Low	8115	1937.5 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26615	1907.5 MHz	High	8615	1987.5 MHz
	20MHz	Low	26140	1860 MHz	Low	8140	1940 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26590	1905 MHz	High	8590	1985 MHz
LTE Cat M1 Band 26 (824-849)	1.4MHz	Low	26797	824.7 MHz	Low	8797	869.7 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27033	848.3 MHz	High	9033	893.3 MHz
	3MHz	Low	26805	825.5 MHz	Low	8805	870.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27025	847.5 MHz	High	9025	892.5 MHz
	5MHz	Low	26815	826.5 MHz	Low	8815	871.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27015	846.5 MHz	High	9015	891.5 MHz
	10MHz	Low	26840	829 MHz	Low	8840	844 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	26990	844 MHz	High	8990	889 MHz
	15MHz	Low	26865	831.5 MHz	Low	8865	876.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	26965	841.5 MHz	High	8965	886.5 MHz
LTE Cat M1 Band 66	1.4MHz	Low	131979	1710.7 MHz	Low	66443	2110.7 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132665	1779.3 MHz	High	67129	2179.3 MHz
	3MHz	Low	131987	1711.5 MHz	Low	66451	2111.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132657	1778.5MHz	High	67121	2178.5MHz
	5MHz	Low	131997	1712.5 MHz	Low	66461	2112.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132647	1777.5 MHz	High	67111	2177.5 MHz
	10MHz	Low	132022	1715 MHz	Low	66486	2115 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132622	1775 MHz	High	67086	2175 MHz
	15MHz	Low	132047	1717.5 MHz	Low	66511	2117.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132597	1772.5 MHz	High	67061	2172.5 MHz
	20MHz	Low	132072	1720 MHz	Low	66536	2120 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132572	1770 MHz	High	67036	2170 MHz
LTE Cat M1	5MHz	Low	134027	700.5 MHz	Low	70391	730.5 MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
Band 85		Middle	134092	707 MHz	Middle	70456	737 MHz
		High	134157	713.5 MHz	High	70521	743.5 MHz
	10MHz	Low	134052	703 MHz	Low	70416	733 MHz
		Middle	134092	707 MHz	Middle	70456	737 MHz
		High	134132	711 MHz	High	70496	741 MHz

Test Mode	SCS (kHz)	RF Channel		
		Low (L)	Middle (M)	High (H)
NTN Band 23	3.75	2000.1 MHz	2010 MHz	2019.9 MHz
	15			
NTN Band 255	3.75	1626.6 MHz	1643.5 MHz	1660.4 MHz
	15			

2.2 Test Mode

Test Mode	Description
TM 1	EUT communication with simulated station in GMSK mode
TM 2	EUT communication with simulated station in 8PSK mode
TM 3	EUT communication with simulated station in Cat M1/QPSK mode
TM 4	EUT communication with simulated station in Cat M1/16QAM mode
TM 5	EUT communication with simulated station in NTN/BPSK mode
TM 6	EUT communication with simulated station in NTN/QPSK mode

2.3 Support Unit used in test

The EUT has been tested as an independent unit.

2.4 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Relative Humidity:	45 ~ 56 % RH Ambient
Voltage:	Nominal: 3.80 Vdc

2.5 Test RF Cable

For all conducted test items: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.


Offset = RF cable loss + attenuator factor.

2.6 Modifications


No modifications were made during testing.

2.7 Test Setup Diagram

2.7.1 Conducted Configuration

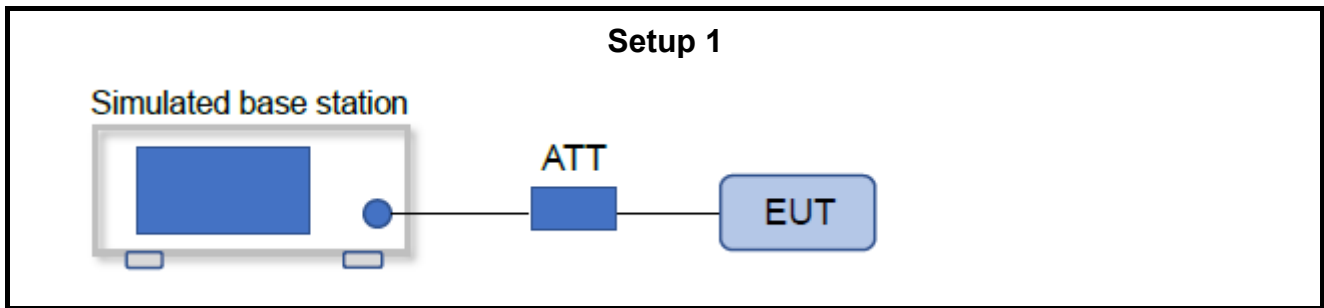

2.7.2 Radiated Configuration

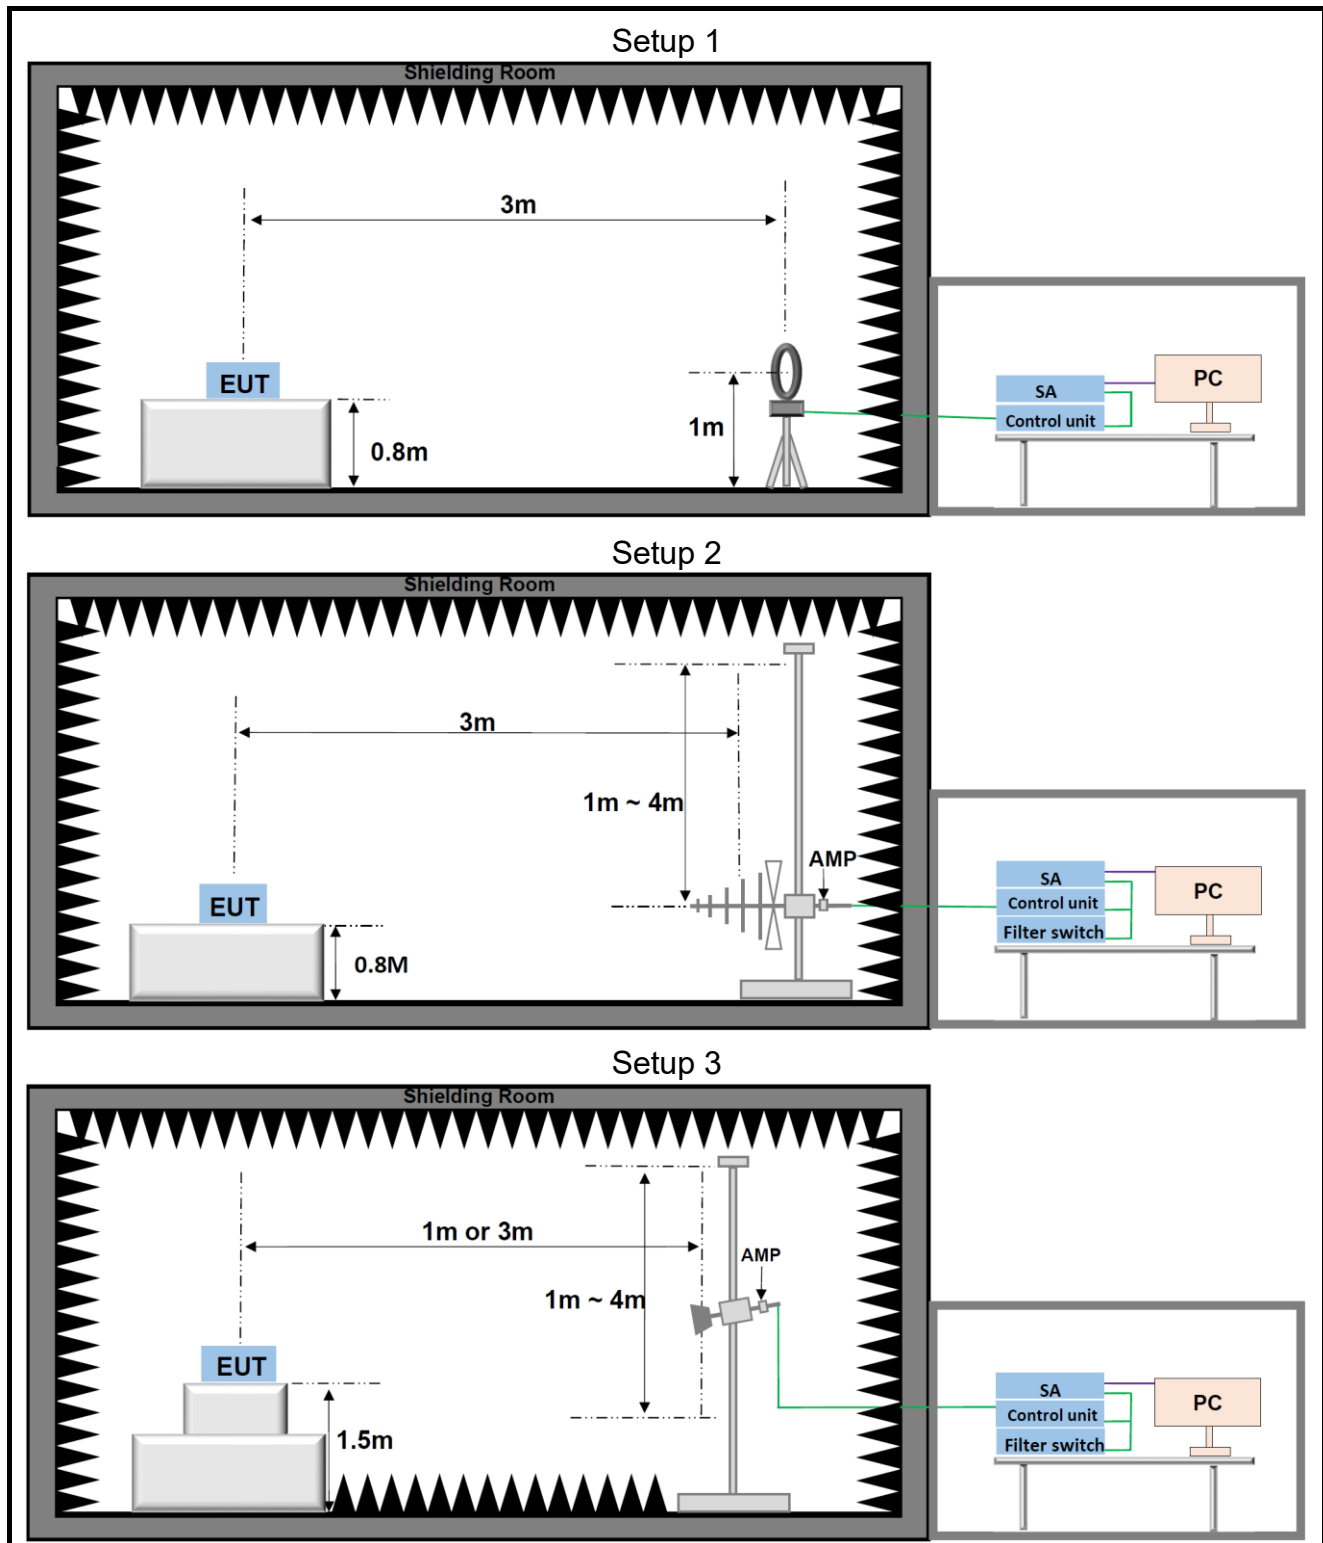

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable recognized national standards.

3.1 Test Equipment List

RF Conducted 04					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Radio Communication Analyzer	Anritsu	MT8821C	6262170436	2026/03/05	2027/03/04
Signal Analyzer	Keysight	N9020A	US46220152	2026/03/05	2027/03/04
Signal Generator	Keysight	N5182A	MY49060761	2026/03/05	2027/03/04
Signal Generator	R&S	SMR20	101691	2026/03/05	2027/03/04
Hygrometer	BingYu	HTC-1	N/A	2025/05/29	2027/05/28
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
				2026/05/29	2027/05/28
Band Reject Filter Group	Tonscend	JS0806-F	23B806F0662	N/A	N/A
RF Control Unit	Tonscend	JS0806-1	22L8060650	N/A	N/A
Measurement Software	Tonscend	TS1120 V3.1.46	10636	N/A	N/A

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1643	2023/06/25	2026/06/24
Double-Ridged Horn Antennas	Schwarzbeck	BBHA 9120D	2809	2023/06/25	2026/06/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1290	2023/06/25	2026/06/24
Loop Antenna	Schwarzbeck	FMZB 1519C	1519C-028	2023/06/29	2026/06/28
Signal Analyzer	Keysight	N9020A	MY49100252	2026/04/03	2027/04/02
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
				2026/05/29	2027/05/28
Wideband Radio Communication Tester	R&S	CMW500	150645	2026/03/06	2027/03/05
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060273	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP01018050	AP22G806258	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806247	2025/03/11	2027/03/10
Hygrometer	BINGYU	HTC-1	N/A	2025/07/25	2026/07/24
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

3.2 Measurement Uncertainty

Parameter	U _{lab}
Output Power	0.76dB
Radiated Emissions(9kHz~30MHz)	2.40dB
Radiated Emissions(30MHz~1000MHz)	4.66dB
Radiated Emissions(1GHz~18GHz)	5.42dB
Radiated Emissions(18GHz~40GHz)	5.46dB

Uncertainty figures are valid ~ a confidence level of 95%

4 Test results

4.1 Output Power (ERP / EIRP / Conducted Power)

Limits

ISED Part	Test Band	Limit
RSS-Gen, §6.12; RSS-132, §5.4	GSM850/LTE Band 5/26	The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.
RSS-Gen, §6.12; RSS-133, §5.5	GSM1900/LTE Band 2/25	EIRP $\leq$ 2 W
RSS-139, §5.5	LTE Band 4/66	30 dBm e.i.r.p./channel bandwidth
RSS-130, §4.6.3	LTE Band 12/85	ERP $\leq$ 3 W
RSS-130, §4.6.3	LTE Band 13	The e..p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

Test Procedure

KDB 971168 D01 V03r01 Section 5.2.1, for Conducted Output Power
KDB 971168 D01 V03r01 Section 5.2, for Effective (Isotropic) Radiated Power

Test Settings

Conducted Output Power:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated base station. The simulated station was set to force the EUT to its maximum power setting, Transmitter output power was read off in dBm, read values have added cable loss and attenuation.

Radiated Power:

The formula for calculating ERP/EIRP based on conduction power is as follows:

$\text{EIRP (dBm)} = \text{Conducted Power (dBm)} + \text{antenna gain (dBi)}$

$\text{ERP} = \text{EIRP} - 2.15\text{dB}$

Test Setup

Refer to section 2.7.1 Setup 1

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Results

The detailed test data see: **Appendix**.

4.2 Field Strength of Spurious Radiation

Limits

ISED Part	Test Band	Limit
RSS-Gen, §6.13; RSS-132, §5.5	GSM850/LTE Band 5/26	≤ -13 dBm/100 kHz, from max(min(lowest internal frequency, 30 MHz), 9 kHz) to min(10 * highest fundamental frequency, 40 GHz), after first 1.0 MHz immediately outside and adjacent to each of the sub-bands.
RSS-133, §5.6 RSS-139, §5.6	GSM1900/LTE Band 2/25 LTE Band 4/66	≤ -13 dBm/1 MHz.
RSS-130, §4.7	LTE Band 12/13/85	≤ -13 dBm/100 kHz.
RSS-170 §5.8	NTN Band 23/255	43 + 10 log p (watts) in any 4 kHz, the frequency of which is offset from the channel centre frequency by more than 250% of the occupied bandwidth or necessary bandwidth, whichever is greater

Test Procedure

KDB 971168 D01 V03r01 Section 7

Test Settings

- For radiated emissions measurements performed at frequencies less than or equal to 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
- For radiated emissions measurements performed at frequencies above 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 150cm above the ground plane.
- Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
- For each suspected emission, the EUT was ranged its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) find the maximum reading. Preamplifier and a high pass filter are used for the test in order get better signal level comply with the guidelines.
- The simulated base station was set to force the EUT to its maximum transmitting power.
- spectrum analyzer setting:
Measurements 9KHz~150KHz: RBW = 300Hz; VBW $\geq$ 3 kHz; Detector = RMS
Measurements 150KHz~30MHz: RBW = 10KHz; VBW $\geq$ 30 kHz; Detector = RMS
Measurements 30MHz~1000MHz: RBW = 100KHz or 1MHz; VBW $\geq$ 1MHz or 3MHz; Detector = RMS
Measurements Above 1000MHz: RBW = 1 MHz; VBW $\geq$ 3 MHz; Detector = RMS
- The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:

$$E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$$

$$E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}.$$

$$E(\text{dB}\mu\text{V/m}) = \text{EIRP(dBm)} - 20\log(D) + 104.8; \text{ where } D \text{ is the measurement distance(in the far field region) in m.}$$

$$\text{EIRP(dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8; \text{ where } D \text{ is the measurement distance(in the far field region) in m.}$$

So, from d: The measuring distance is usually at 3m, then $20\log(3)=9.5424$*
Then, $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 9.5424 - 104.8 = E(\text{dB}\mu\text{V/m}) - 95.2576$
- Repeat above procedures until all frequencies measured was complete.
- Measure and record the results in the test report.

Test notes

1. This device employs GSM, GPRS, and EGPRS capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
4. Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. the disturbance between 9KHz to 30MHz, 30MHz-1GHz and 18GHz to 40GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded, so only the harmonics had been displayed.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Test Setup

Refer to section 2.7.2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Appendix**.

5 Test Setup Photos

The detailed test data see: **Appendix A - WWAN Setup Photos**

Appendix

Effective Isotropic Radiated Power

Test Result GSM1900 (Dipole Antenna)

Band	Channel	Slot	Result (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1	26.25	31.55	33.00	PASS
GPRS1900	661	1	26.70	32.00	33.00	PASS
GPRS1900	810	1	26.22	31.52	33.00	PASS
GPRS1900	512	2	26.10	31.40	33.00	PASS
GPRS1900	661	2	26.73	32.03	33.00	PASS
GPRS1900	810	2	27.07	32.37	33.00	PASS
GPRS1900	512	3	25.82	31.12	33.00	PASS
GPRS1900	661	3	26.47	31.77	33.00	PASS
GPRS1900	810	3	25.95	31.25	33.00	PASS
GPRS1900	512	4	24.24	29.54	33.00	PASS
GPRS1900	661	4	25.17	30.47	33.00	PASS
GPRS1900	810	4	24.67	29.97	33.00	PASS
EGPRS1900	512	1	25.04	30.34	33.00	PASS
EGPRS1900	661	1	24.77	30.07	33.00	PASS
EGPRS1900	810	1	24.46	29.76	33.00	PASS
EGPRS1900	512	2	24.19	29.49	33.00	PASS
EGPRS1900	661	2	24.03	29.33	33.00	PASS
EGPRS1900	810	2	23.80	29.10	33.00	PASS
EGPRS1900	512	3	21.97	27.27	33.00	PASS
EGPRS1900	661	3	21.90	27.20	33.00	PASS
EGPRS1900	810	3	21.59	26.89	33.00	PASS
EGPRS1900	512	4	20.61	25.91	33.00	PASS
EGPRS1900	661	4	20.56	25.86	33.00	PASS
EGPRS1900	810	4	20.21	25.51	33.00	PASS

Test Result GSM1900 (Omnidirectional Antenna)

Band	Channel	Slot	Result (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1	26.25	27.51	33.00	PASS
GPRS1900	661	1	26.70	27.96	33.00	PASS
GPRS1900	810	1	26.22	27.48	33.00	PASS
GPRS1900	512	2	26.10	27.36	33.00	PASS
GPRS1900	661	2	26.73	27.99	33.00	PASS
GPRS1900	810	2	27.07	28.33	33.00	PASS
GPRS1900	512	3	25.82	27.08	33.00	PASS
GPRS1900	661	3	26.47	27.73	33.00	PASS
GPRS1900	810	3	25.95	27.21	33.00	PASS
GPRS1900	512	4	24.24	25.50	33.00	PASS
GPRS1900	661	4	25.17	26.43	33.00	PASS
GPRS1900	810	4	24.67	25.93	33.00	PASS
EGPRS1900	512	1	25.04	26.30	33.00	PASS
EGPRS1900	661	1	24.77	26.03	33.00	PASS
EGPRS1900	810	1	24.46	25.72	33.00	PASS
EGPRS1900	512	2	24.19	25.45	33.00	PASS
EGPRS1900	661	2	24.03	25.29	33.00	PASS
EGPRS1900	810	2	23.80	25.06	33.00	PASS
EGPRS1900	512	3	21.97	23.23	33.00	PASS
EGPRS1900	661	3	21.90	23.16	33.00	PASS
EGPRS1900	810	3	21.59	22.85	33.00	PASS
EGPRS1900	512	4	20.61	21.87	33.00	PASS
EGPRS1900	661	4	20.56	21.82	33.00	PASS
EGPRS1900	810	4	20.21	21.47	33.00	PASS

Maximum Power**Test Result (Dipole Antenna)**

Frequency Band	Frequency Range (MHz)		Emission Designator	Conducted Power (dBm)	Conducted Power (W)	Gain (dBi)	EIRP/ERP		Limit (dBm)
	Low	High					dBm	W	
GSM 850	824.2	848.8	249KGXW	32.71	1.8664	1.78	32.34	1.7140	34.77
GSM 850	824.2	848.8	244KG7W	27.40	0.5495	1.78	27.03	0.5047	34.77
Cat M1 Band 2	1860	1900	1M10G7D	24.29	0.2685	5.30	29.59	0.9099	33.00
Cat M1 Band 2	1860	1900	1M07W7D	24.39	0.2748	5.30	29.69	0.9311	33.00
Cat M1 Band 2	1857.5	1902.5	1M11G7D	24.33	0.2710	5.30	29.63	0.9183	33.00
Cat M1 Band 2	1857.5	1902.5	1M06W7D	24.45	0.2786	5.30	29.75	0.9441	33.00
Cat M1 Band 4	1720	1745	1M09G7D	24.24	0.2655	3.74	27.98	0.6281	30.00
Cat M1 Band 4	1720	1745	915KW7D	24.25	0.2661	3.74	27.99	0.6295	30.00
Cat M1 Band 4	1715	1750	1M09G7D	24.31	0.2698	3.74	28.05	0.6383	30.00
Cat M1 Band 4	1715	1750	910KW7D	24.26	0.2667	3.74	28.00	0.6310	30.00
Cat M1 Band 5	829	844	1M09G7D	23.82	0.2410	1.78	23.45	0.2213	34.77
Cat M1 Band 5	829	844	911KW7D	23.88	0.2443	1.78	23.51	0.2244	34.77
Cat M1 Band 5	826.5	846.5	1M09G7D	23.84	0.2421	1.78	23.47	0.2223	34.77
Cat M1 Band 5	826.5	846.5	912KW7D	23.96	0.2489	1.78	23.59	0.2286	34.77
Cat M1 Band 12	704	711	1M09G7D	23.60	0.2291	2.17	23.62	0.2301	34.77
Cat M1 Band 12	704	711	911KW7D	22.93	0.1963	2.17	22.95	0.1972	34.77
Cat M1 Band 12	701.5	713.5	1M08G7D	23.82	0.2410	2.17	23.84	0.2421	34.77
Cat M1 Band 12	701.5	713.5	910KW7D	23.30	0.2138	2.17	23.32	0.2148	34.77
Cat M1 Band 13	782	782	1M09G7D	23.82	0.2410	2.74	24.41	0.2761	34.77
Cat M1 Band 13	782	782	906KW7D	24.04	0.2535	2.74	24.63	0.2904	34.77
Cat M1 Band 13	779.5	784.5	1M09G7D	24.01	0.2518	2.74	24.60	0.2884	34.77
Cat M1 Band 13	779.5	784.5	908KW7D	24.13	0.2588	2.74	24.72	0.2965	34.77
Cat M1 Band 25	1860	1905	1M10G7D	23.85	0.2427	5.30	29.15	0.8222	33.00
Cat M1 Band 25	1860	1905	946KW7D	24.01	0.2518	5.30	29.31	0.8531	33.00
Cat M1 Band 25	1857.5	1907.5	1M10G7D	23.90	0.2455	5.30	29.20	0.8318	33.00
Cat M1 Band 25	1857.5	1907.5	941KW7D	24.06	0.2547	5.30	29.36	0.8630	33.00
Cat M1 Band 26 (824 ~ 849 MHz)	831.5	841.5	1M09G7D	23.90	0.2455	1.18	22.93	0.1963	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	831.5	841.5	912KW7D	24.05	0.2541	1.18	23.08	0.2032	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	826.5	846.5	1M09G7D	24.01	0.2518	1.18	23.04	0.2014	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	829	844	909KW7D	24.10	0.2570	1.18	23.13	0.2056	34.77
Cat M1 Band 66	1720	1770	1M09G7D	24.19	0.2624	3.74	27.93	0.6209	30.00
Cat M1 Band 66	1720	1770	921KW7D	24.14	0.2594	3.74	27.88	0.6138	30.00
Cat M1 Band 66	1712.5	1777.5	1M09G7D	24.25	0.2661	3.74	27.99	0.6295	30.00
Cat M1 Band 66	1717.5	1772.5	917KW7D	24.24	0.2655	3.74	27.98	0.6281	30.00
Cat M1 Band 85	703	711	1M09G7D	23.78	0.2388	2.17	23.80	0.2399	34.77

Cat M1 Band 85	703	711	911KW7D	23.83	0.2415	2.17	23.85	0.2427	34.77
Cat M1 Band 85	700.5	713.5	1M09G7D	23.86	0.2432	2.17	23.88	0.2443	34.77
NTN Band 23	2000.1	2019.9	189KG7D	23.75	0.2371	4.37	28.12	0.6486	31.37
NTN Band 23	2000.1	2019.9	130KG7D	23.51	0.2244	4.37	27.88	0.6138	31.37
NTN Band 255	1626.6	1660.4	189KG7D	23.82	0.2410	3.91	27.73	0.5929	30.91
NTN Band 255	1626.6	1660.4	132KG7D	23.72	0.2355	3.91	27.63	0.5794	30.91

Test Result (Omnidirectional Antenna)

Frequency Band	Frequency Range (MHz)		Emission Designator	Conducted Power (dBm)	Conducted Power (W)	Gain (dBi)	EIRP/ERP		Limit (dBm)
	Low	High					dBm	W	
GSM 850	824.2	848.8	249KGXW	32.71	1.8664	2.01	32.57	1.8072	34.77
GSM 850	824.2	848.8	244KG7W	27.40	0.5495	2.01	27.26	0.5321	34.77
Cat M1 Band 2	1860	1900	1M10G7D	24.29	0.2685	1.26	25.55	0.3589	33.00
Cat M1 Band 2	1860	1900	1M07W7D	24.39	0.2748	1.26	25.65	0.3673	33.00
Cat M1 Band 2	1857.5	1902.5	1M11G7D	24.33	0.2710	1.26	25.59	0.3622	33.00
Cat M1 Band 2	1857.5	1902.5	1M06W7D	24.45	0.2786	1.26	25.71	0.3724	33.00
Cat M1 Band 4	1720	1745	1M09G7D	24.24	0.2655	1.15	25.39	0.3459	30.00
Cat M1 Band 4	1720	1745	915KW7D	24.25	0.2661	1.15	25.40	0.3467	30.00
Cat M1 Band 4	1715	1750	1M09G7D	24.31	0.2698	1.15	25.46	0.3516	30.00
Cat M1 Band 4	1715	1750	910KW7D	24.26	0.2667	1.15	25.41	0.3475	30.00
Cat M1 Band 5	829	844	1M09G7D	23.82	0.2410	2.01	23.68	0.2333	34.77
Cat M1 Band 5	829	844	911KW7D	23.88	0.2443	2.01	23.74	0.2366	34.77
Cat M1 Band 5	826.5	846.5	1M09G7D	23.84	0.2421	2.01	23.70	0.2344	34.77
Cat M1 Band 5	826.5	846.5	912KW7D	23.96	0.2489	2.01	23.82	0.2410	34.77
Cat M1 Band 12	704	711	1M09G7D	23.60	0.2291	1.77	23.22	0.2099	34.77
Cat M1 Band 12	704	711	911KW7D	22.93	0.1963	1.77	22.55	0.1799	34.77
Cat M1 Band 12	701.5	713.5	1M08G7D	23.82	0.2410	1.77	23.44	0.2208	34.77
Cat M1 Band 12	701.5	713.5	910KW7D	23.30	0.2138	1.77	22.92	0.1959	34.77
Cat M1 Band 13	782	782	1M09G7D	23.82	0.2410	1.51	23.18	0.2080	34.77
Cat M1 Band 13	782	782	906KW7D	24.04	0.2535	1.51	23.40	0.2188	34.77
Cat M1 Band 13	779.5	784.5	1M09G7D	24.01	0.2518	1.51	23.37	0.2173	34.77
Cat M1 Band 13	779.5	784.5	908KW7D	24.13	0.2588	1.51	23.49	0.2234	34.77
Cat M1 Band 25	1860	1905	1M10G7D	23.85	0.2427	1.26	25.11	0.3243	33.00
Cat M1 Band 25	1860	1905	946KW7D	24.01	0.2518	1.26	25.27	0.3365	33.00
Cat M1 Band 25	1857.5	1907.5	1M10G7D	23.90	0.2455	1.26	25.16	0.3281	33.00
Cat M1 Band 25	1857.5	1907.5	941KW7D	24.06	0.2547	1.26	25.32	0.3404	33.00
Cat M1 Band 26 (824 ~ 849 MHz)	831.5	841.5	1M09G7D	23.90	0.2455	2.01	23.76	0.2377	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	831.5	841.5	912KW7D	24.05	0.2541	2.01	23.91	0.2460	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	826.5	846.5	1M09G7D	24.01	0.2518	2.01	23.87	0.2438	34.77
Cat M1 Band 26 (824 ~ 849 MHz)	829	844	909KW7D	24.10	0.2570	2.01	23.96	0.2489	34.77
Cat M1 Band 66	1720	1770	1M09G7D	24.19	0.2624	1.15	25.34	0.3420	30.00
Cat M1 Band 66	1720	1770	921KW7D	24.14	0.2594	1.15	25.29	0.3381	30.00
Cat M1 Band 66	1712.5	1777.5	1M09G7D	24.25	0.2661	1.15	25.40	0.3467	30.00
Cat M1 Band 66	1717.5	1772.5	917KW7D	24.24	0.2655	1.15	25.39	0.3459	30.00
Cat M1 Band 85	703	711	1M09G7D	23.78	0.2388	1.75	23.38	0.2178	34.77
Cat M1 Band 85	703	711	911KW7D	23.83	0.2415	1.75	23.43	0.2203	34.77
Cat M1 Band 85	700.5	713.5	1M09G7D	23.86	0.2432	1.75	23.46	0.2218	34.77


NTN Band 23	2000.1	2019.9	189KG7D	23.75	0.2371	3.00	26.75	0.4732	30.00
NTN Band 23	2000.1	2019.9	130KG7D	23.51	0.2244	3.00	26.51	0.4477	30.00
NTN Band 255	1626.6	1660.4	189KG7D	23.82	0.2410	1.20	25.02	0.3177	28.20
NTN Band 255	1626.6	1660.4	132KG7D	23.72	0.2355	1.20	24.92	0.3105	28.20

Field Strength of Spurious Radiation

Test Result for GSM (Dipole Antenna)

Project Information			
Mode:	GSM 850	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		


Test Graph

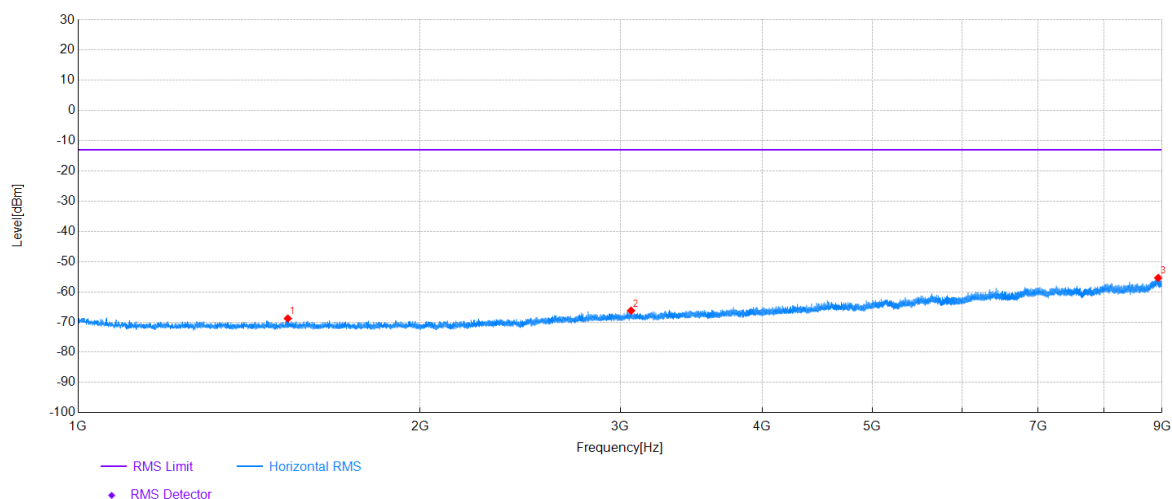

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1529.60	44.86	-113.68	-68.82	-13.00	55.82	Horizontal	PASS
2	3067.47	42.12	-108.35	-66.23	-13.00	53.23	Horizontal	PASS
3	8930.40	37.17	-92.55	-55.38	-13.00	42.38	Horizontal	PASS

Project Information			
Mode:	GSM 850	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		


Test Graph

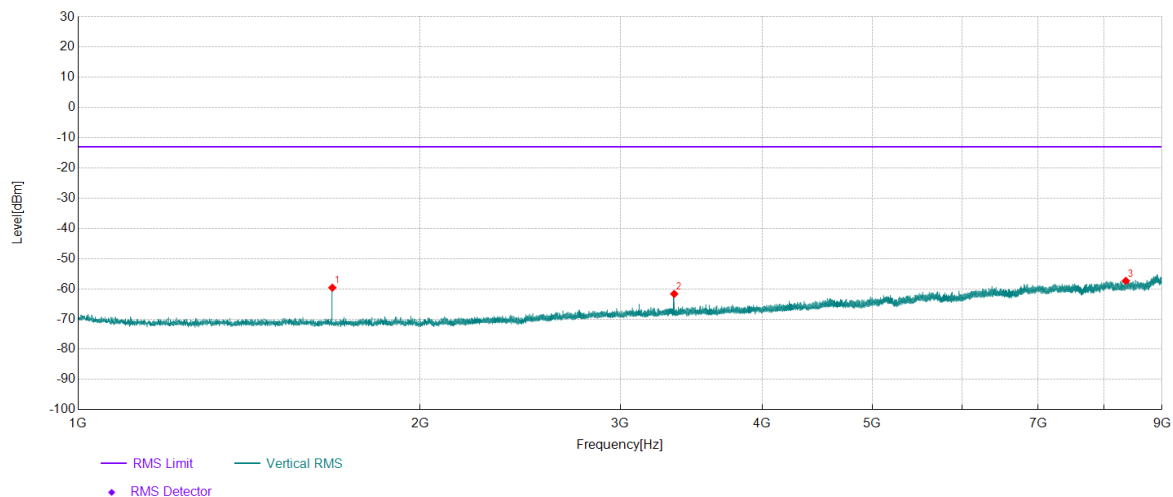

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1674.13	54.08	-113.70	-59.62	-13.00	46.62	Vertical	PASS
2	3348.00	45.74	-107.42	-61.68	-13.00	48.68	Vertical	PASS
3	8363.20	36.98	-94.35	-57.37	-13.00	44.37	Vertical	PASS

Project Information			
Mode:	GSM 1900	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

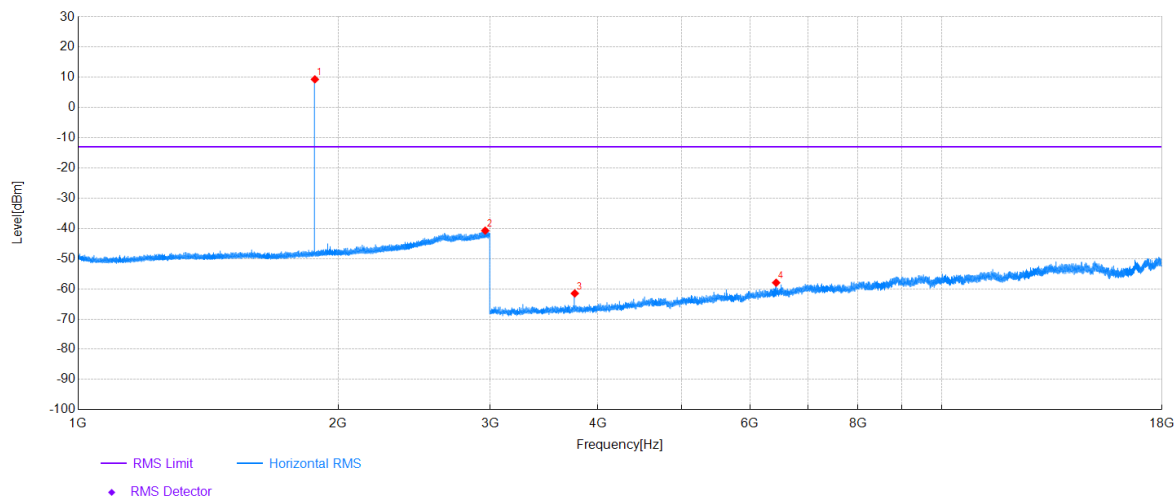


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1880.00	104.55	-95.20	9.35	-	-	Horizontal	NA
2	2960.90	50.19	-90.92	-40.73	-13.00	27.73	Horizontal	PASS
3	3760.00	44.39	-105.90	-61.51	-13.00	48.51	Horizontal	PASS
4	6432.00	39.71	-97.67	-57.96	-13.00	44.96	Horizontal	PASS

Project Information			
Mode:	GSM 1900	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

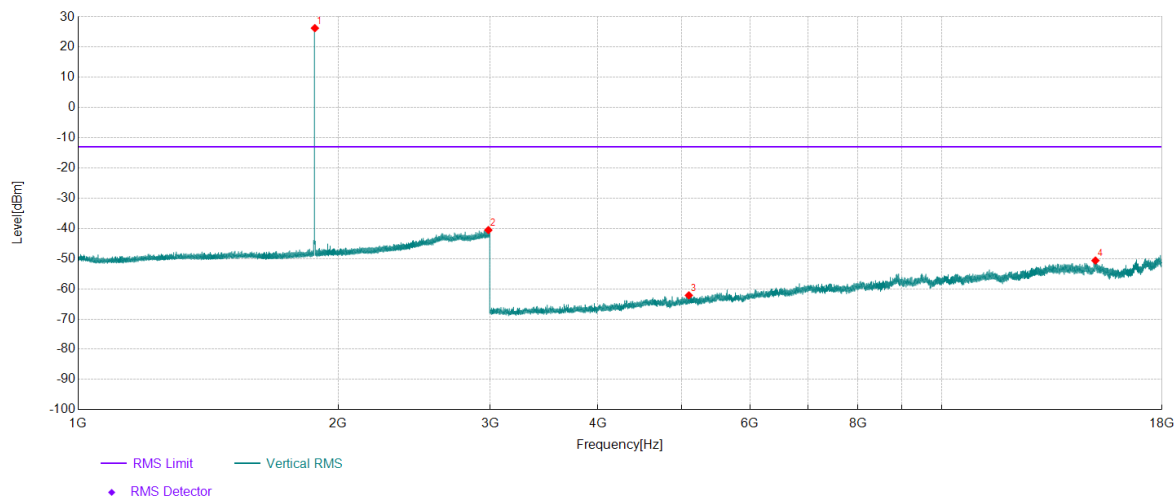


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1880.00	121.50	-95.20	26.30	-	-	Vertical	NA
2	2985.80	50.49	-91.03	-40.54	-13.00	27.54	Vertical	PASS
3	5096.50	38.97	-101.12	-62.15	-13.00	49.15	Vertical	PASS
4	15070.50	34.30	-84.93	-50.63	-13.00	37.63	Vertical	PASS

Test Result for LTE Cat M1 (Dipole Antenna)

Project Information			
Mode:	Cat M	Band:	2
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

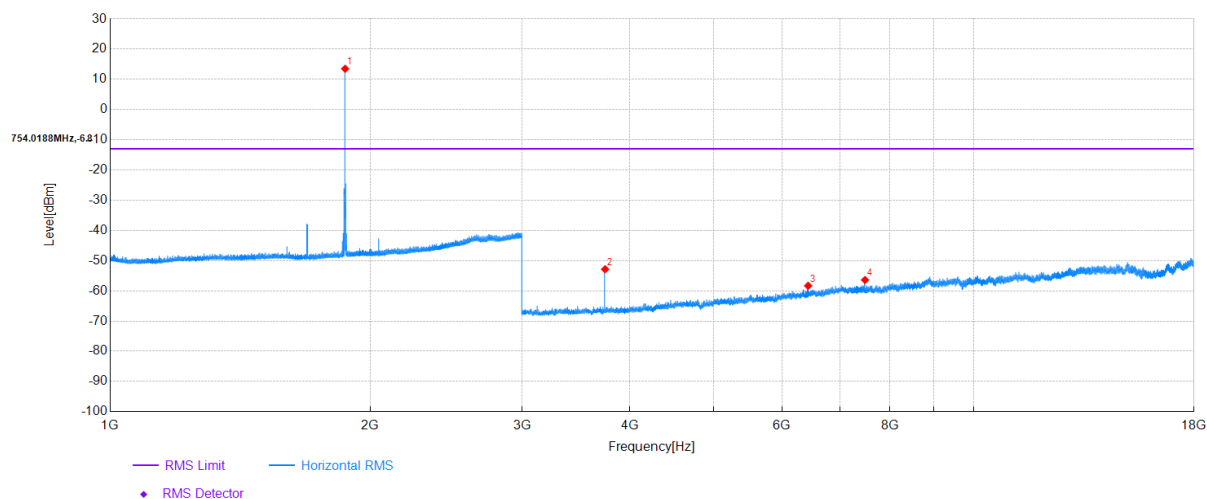


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1871.30	108.75	-95.23	13.52	-	-	Horizontal	NA
2	3743.00	53.11	-105.95	-52.84	-13.00	39.84	Horizontal	PASS
3	6432.00	39.35	-97.67	-58.32	-13.00	45.32	Horizontal	PASS
4	7485.50	39.58	-95.98	-56.40	-13.00	43.40	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	2
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

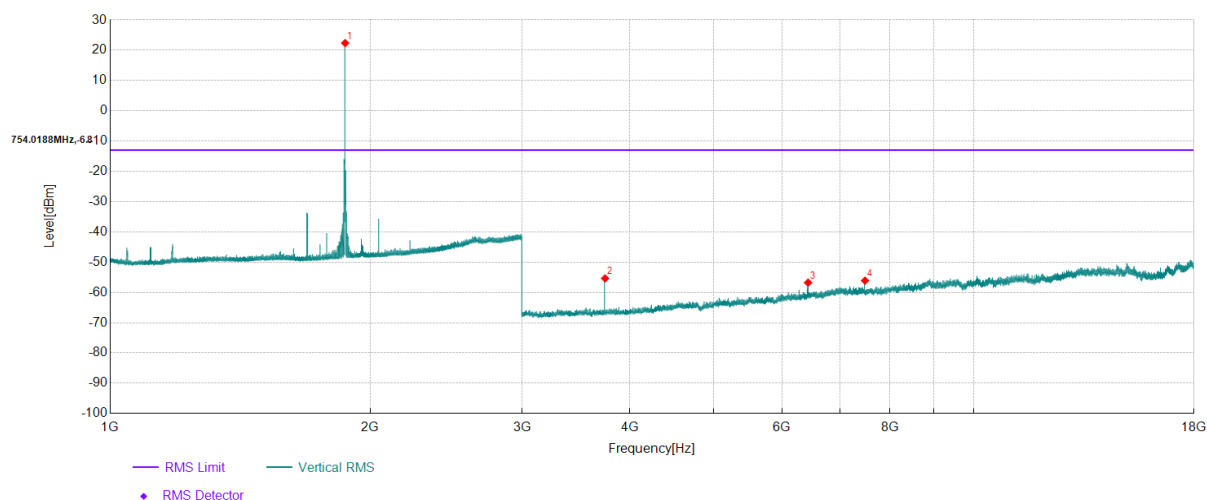


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1871.40	117.61	-95.23	22.38	-	-	Vertical	NA
2	3743.00	50.58	-105.95	-55.37	-13.00	42.37	Vertical	PASS
3	6432.00	40.91	-97.67	-56.76	-13.00	43.76	Vertical	PASS
4	7485.50	39.88	-95.98	-56.10	-13.00	43.10	Vertical	PASS

Project Information

Mode:	Cat M	Band:	4
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

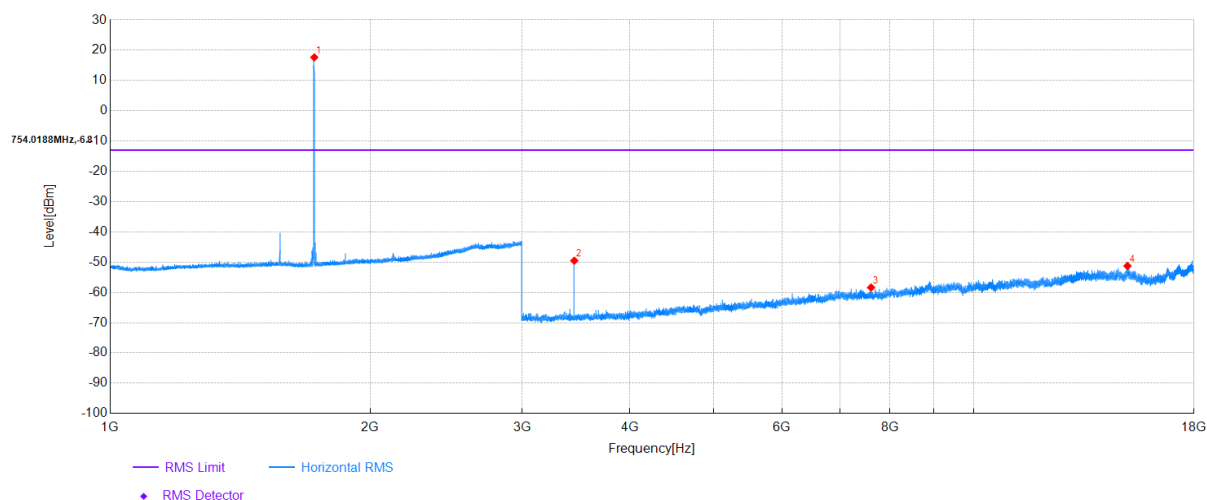


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1723.60	113.12	-95.47	17.65	-	-	Horizontal	NA
2	3448.00	57.31	-106.83	-49.52	-13.00	36.52	Horizontal	PASS
3	7607.50	37.24	-95.61	-58.37	-13.00	45.37	Horizontal	PASS
4	15071.50	33.68	-84.91	-51.23	-13.00	38.23	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	4
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

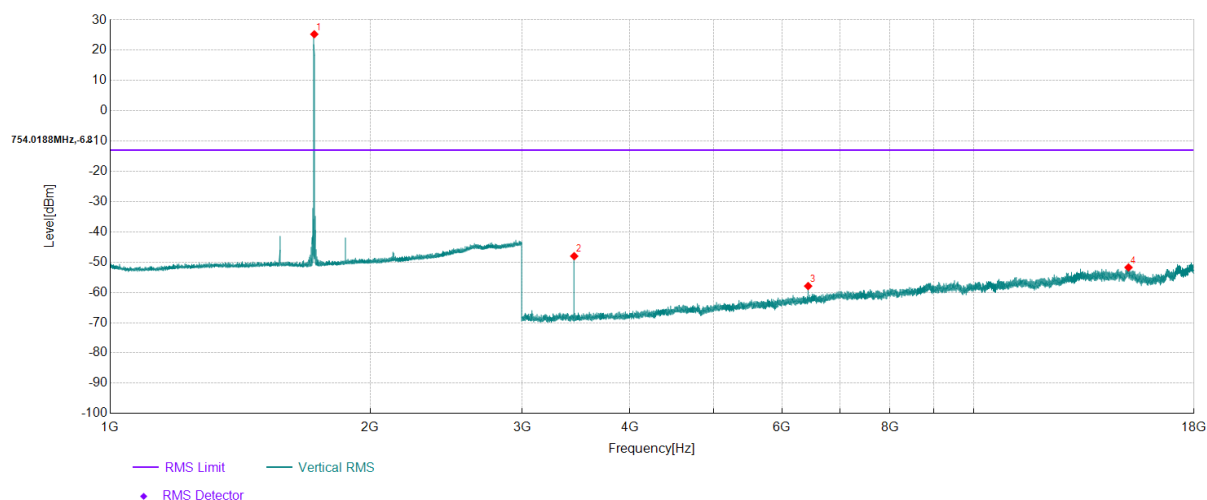


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1723.60	120.77	-95.47	25.30	-	-	Vertical	NA
2	3447.00	58.81	-106.82	-48.01	-13.00	35.01	Vertical	PASS
3	6432.00	39.77	-97.67	-57.90	-13.00	44.90	Vertical	PASS
4	15115.00	32.72	-84.47	-51.75	-13.00	38.75	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	5
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

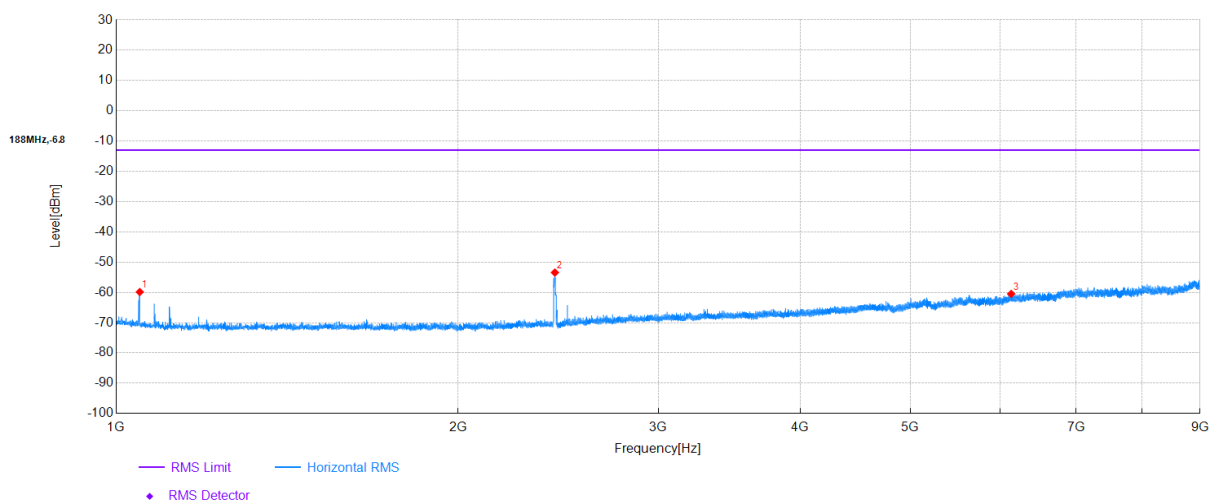


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1049.07	53.43	-113.28	-59.85	-13.00	46.85	Horizontal	PASS
2	2433.60	58.06	-111.49	-53.43	-13.00	40.43	Horizontal	PASS
3	6137.33	38.22	-98.70	-60.48	-13.00	47.48	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	5
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

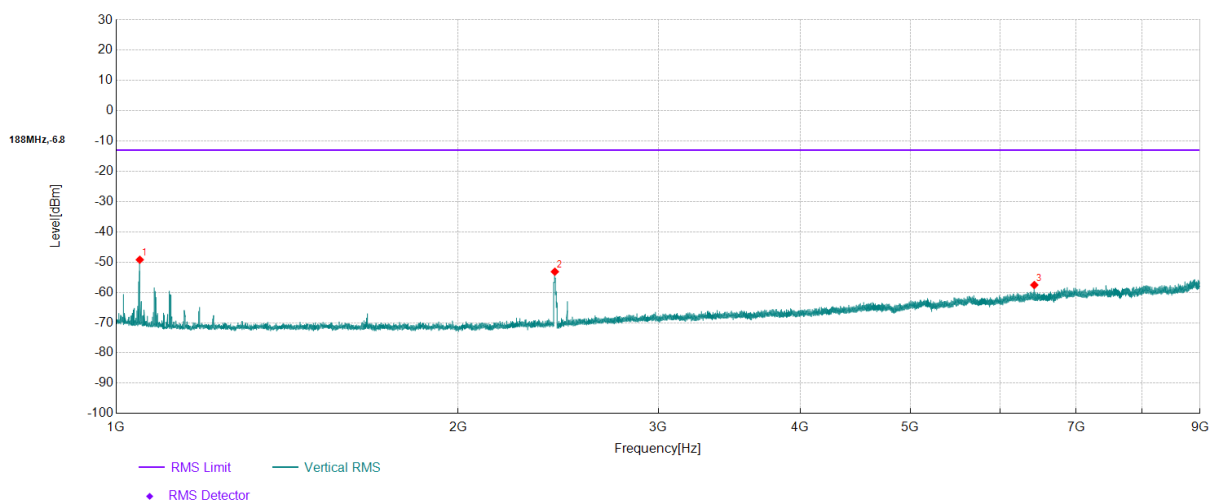


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1049.07	64.08	-113.28	-49.20	-13.00	36.20	Vertical	PASS
2	2433.60	58.34	-111.49	-53.15	-13.00	40.15	Vertical	PASS
3	6432.00	40.05	-97.59	-57.54	-13.00	44.54	Vertical	PASS

Project Information

Mode:	Cat M	Band:	12
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

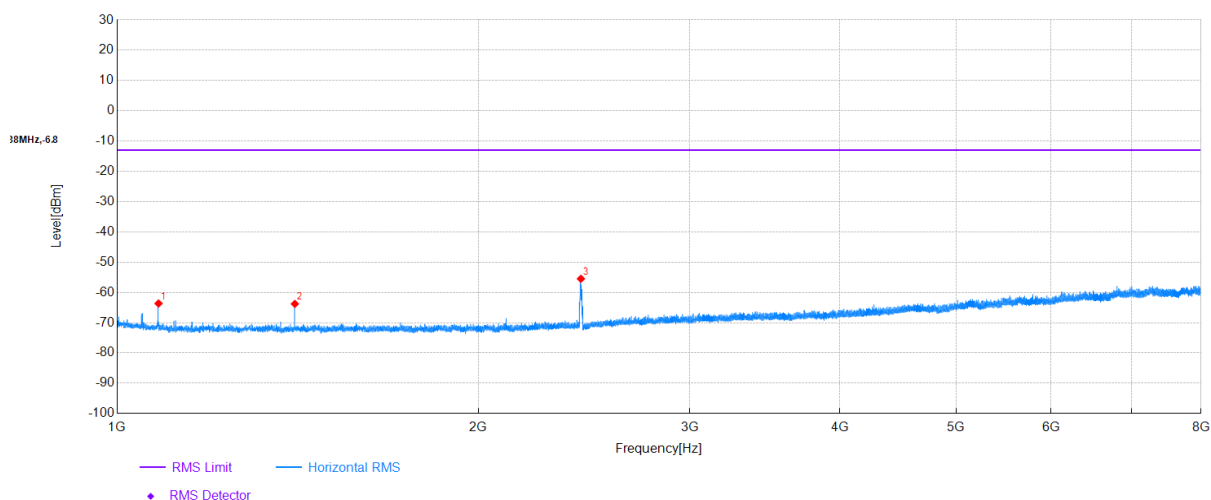


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1082.60	49.98	-113.64	-63.66	-13.00	50.66	Horizontal	PASS
2	1406.23	50.11	-113.90	-63.79	-13.00	50.79	Horizontal	PASS
3	2434.53	55.99	-111.48	-55.49	-13.00	42.49	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	12
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

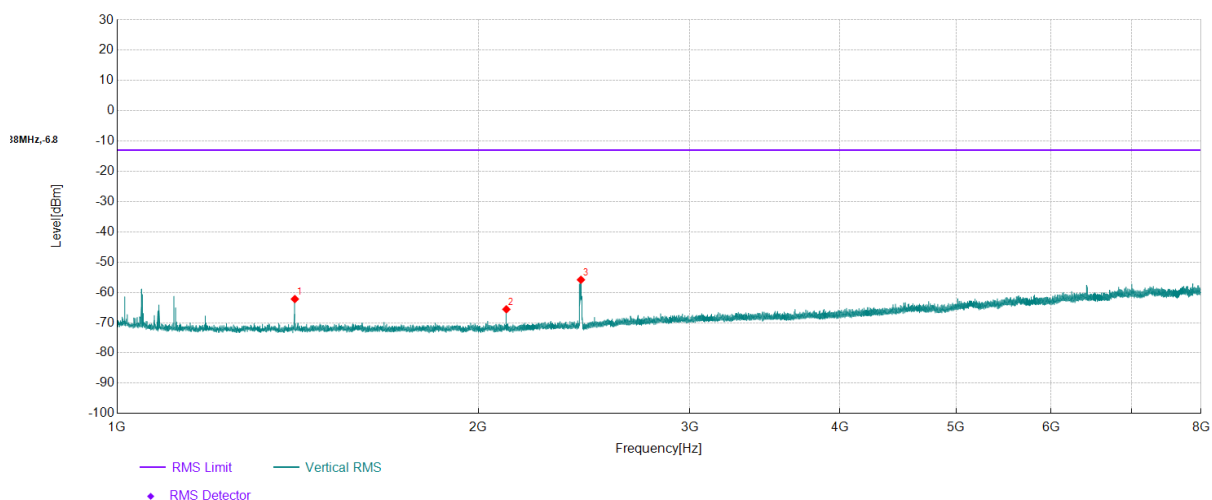


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1406.23	51.71	-113.90	-62.19	-13.00	49.19	Vertical	PASS
2	2109.97	47.25	-112.82	-65.57	-13.00	52.57	Vertical	PASS
3	2434.53	55.65	-111.48	-55.83	-13.00	42.83	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	13
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		


Test Graph

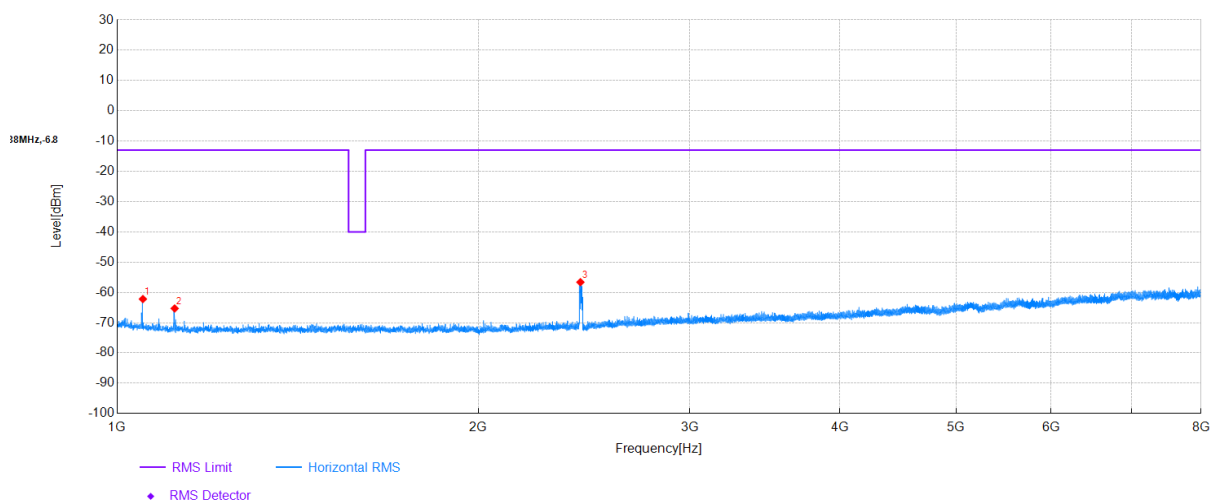

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1050.63	51.12	-113.30	-62.18	-13.00	49.18	Horizontal	PASS
2	1116.67	48.59	-113.89	-65.30	-13.00	52.30	Horizontal	PASS
3	2432.20	54.88	-111.49	-56.61	-13.00	43.61	Horizontal	PASS

Project Information			
Mode:	Cat M	Band:	13
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		


Test Graph

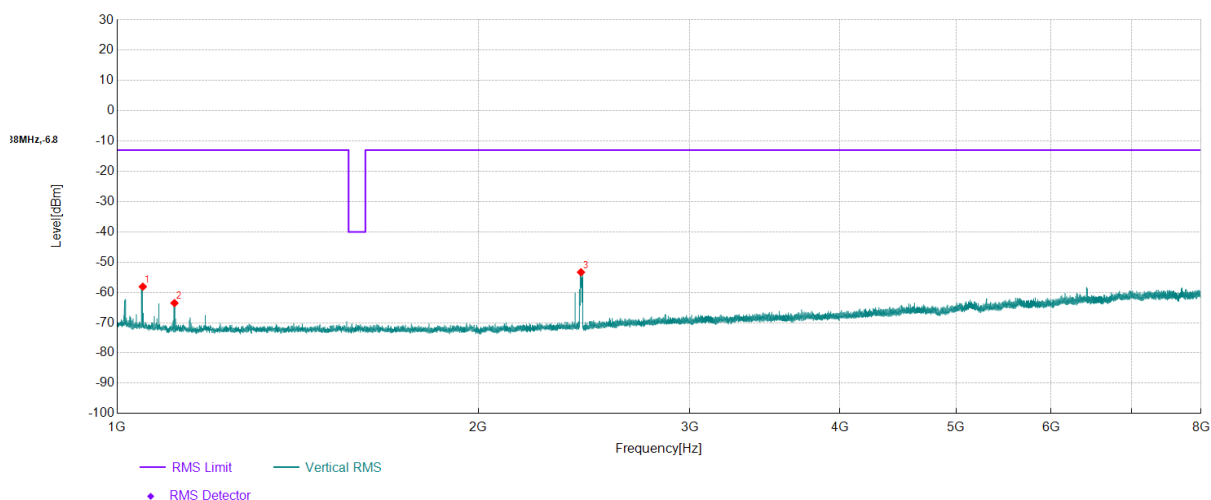

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1050.40	55.21	-113.30	-58.09	-13.00	45.09	Vertical	PASS
2	1116.20	50.38	-113.89	-63.51	-13.00	50.51	Vertical	PASS
3	2435.00	58.15	-111.48	-53.33	-13.00	40.33	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	25
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

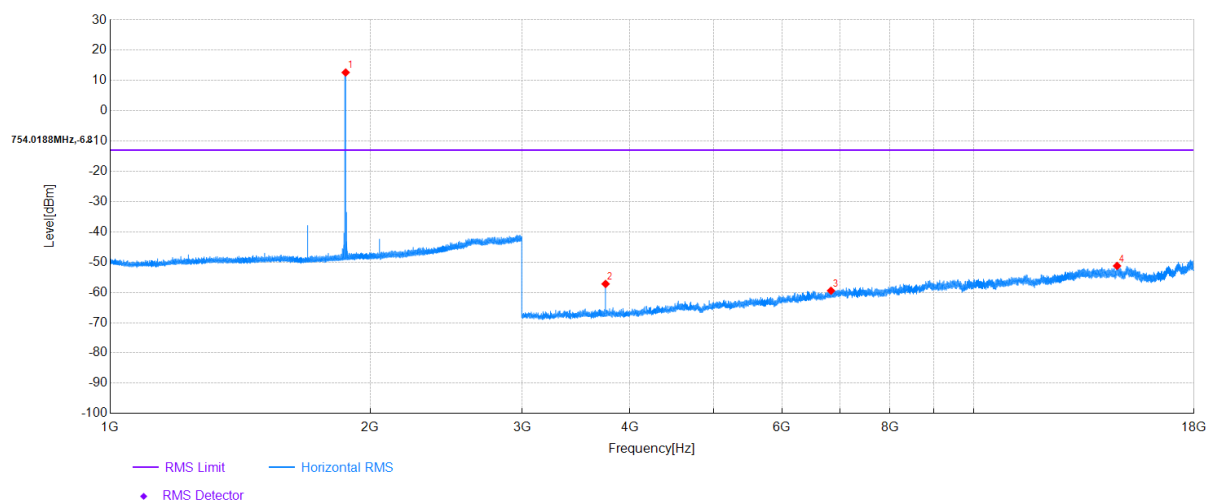


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1873.90	107.89	-95.22	12.67	-	-	Horizontal	NA
2	3747.50	48.75	-105.94	-57.19	-13.00	44.19	Horizontal	PASS
3	6836.50	37.31	-96.75	-59.44	-13.00	46.44	Horizontal	PASS
4	14659.00	33.26	-84.49	-51.23	-13.00	38.23	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	25
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

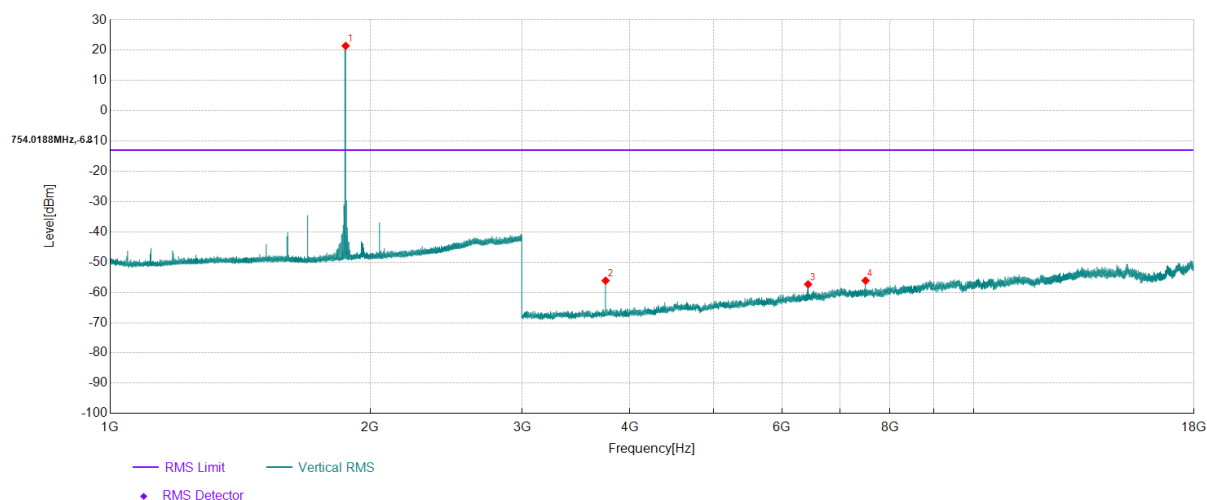


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1874.00	116.68	-95.22	21.46	-	-	Vertical	NA
2	3748.00	49.83	-105.94	-56.11	-13.00	43.11	Vertical	PASS
3	6432.00	40.35	-97.67	-57.32	-13.00	44.32	Vertical	PASS
4	7496.00	39.85	-95.96	-56.11	-13.00	43.11	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	26(824-849)
Bandwidth	15MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

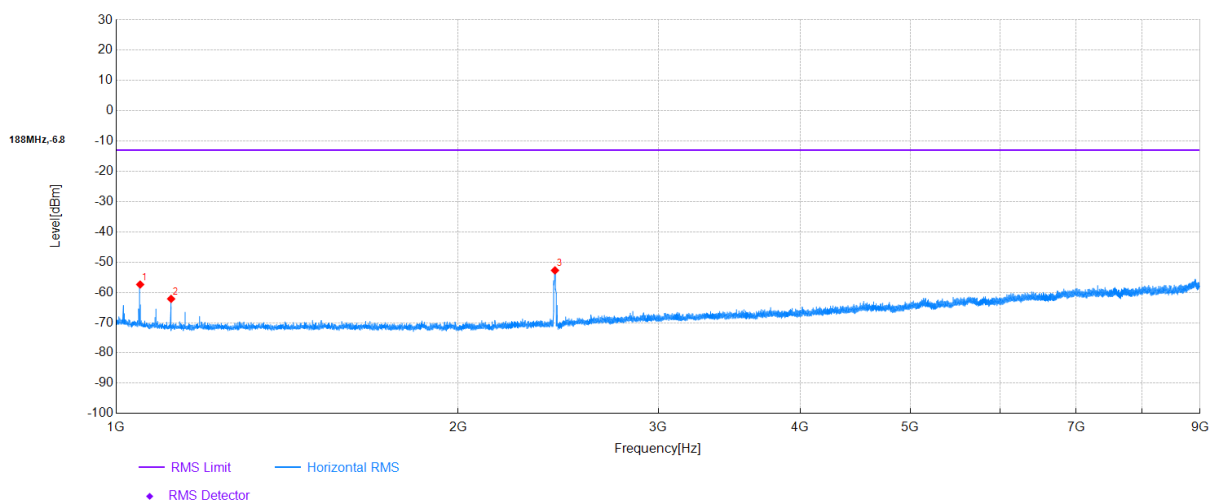


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1049.87	55.90	-113.29	-57.39	-13.00	44.39	Horizontal	PASS
2	1117.87	51.77	-113.90	-62.13	-13.00	49.13	Horizontal	PASS
3	2434.13	58.76	-111.48	-52.72	-13.00	39.72	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	26(824-849)
Bandwidth	15MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

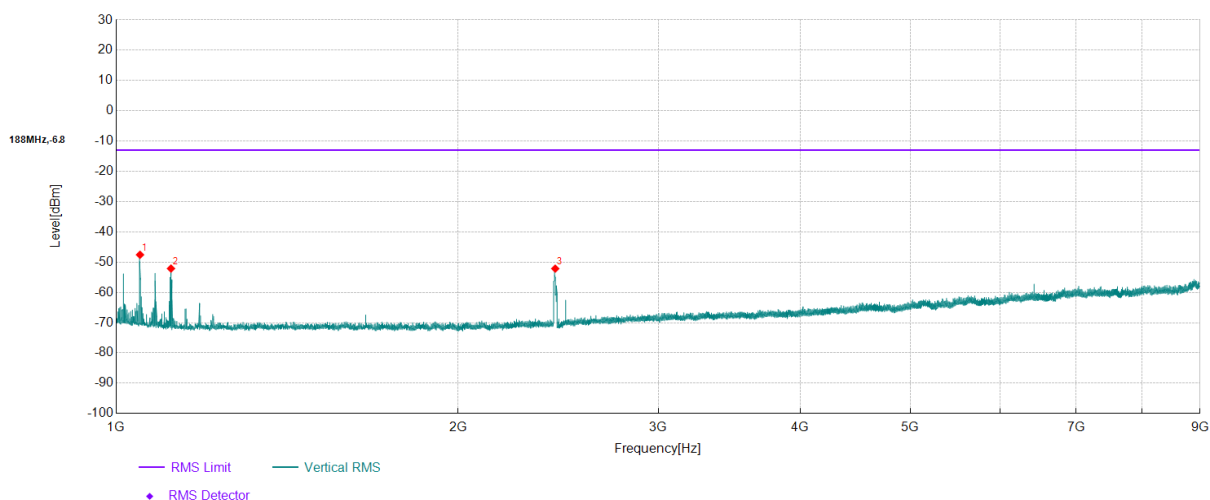


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1049.60	65.73	-113.29	-47.56	-13.00	34.56	Vertical	PASS
2	1117.60	61.79	-113.90	-52.11	-13.00	39.11	Vertical	PASS
3	2435.47	59.33	-111.47	-52.14	-13.00	39.14	Vertical	PASS

Project Information

Mode:	Cat M	Band:	66
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

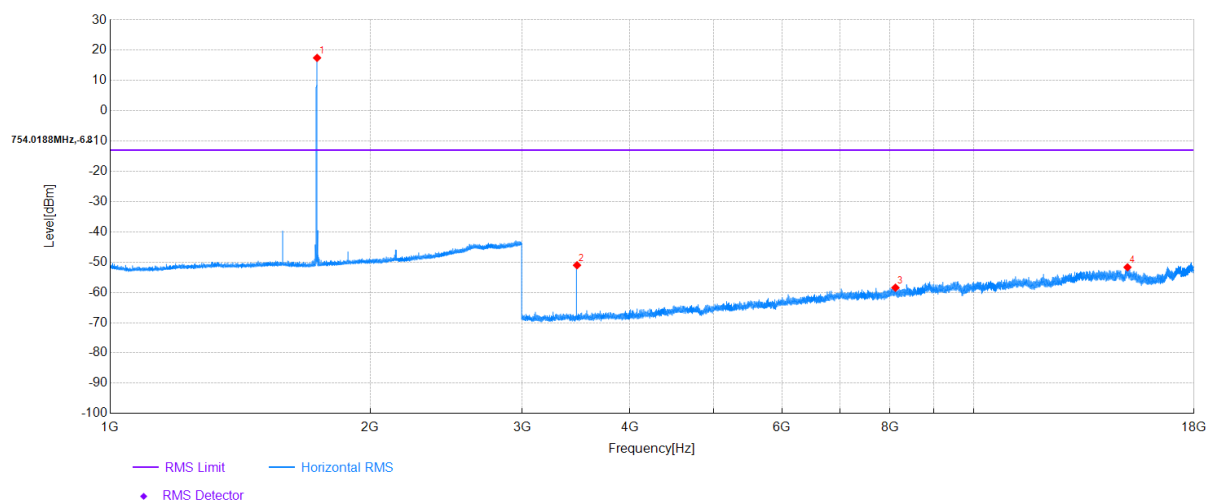


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1736.40	112.92	-95.42	17.50	-	-	Horizontal	NA
2	3473.00	55.77	-106.78	-51.01	-13.00	38.01	Horizontal	PASS
3	8118.00	36.01	-94.46	-58.45	-13.00	45.45	Horizontal	PASS
4	15074.00	33.16	-84.86	-51.70	-13.00	38.70	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	66
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

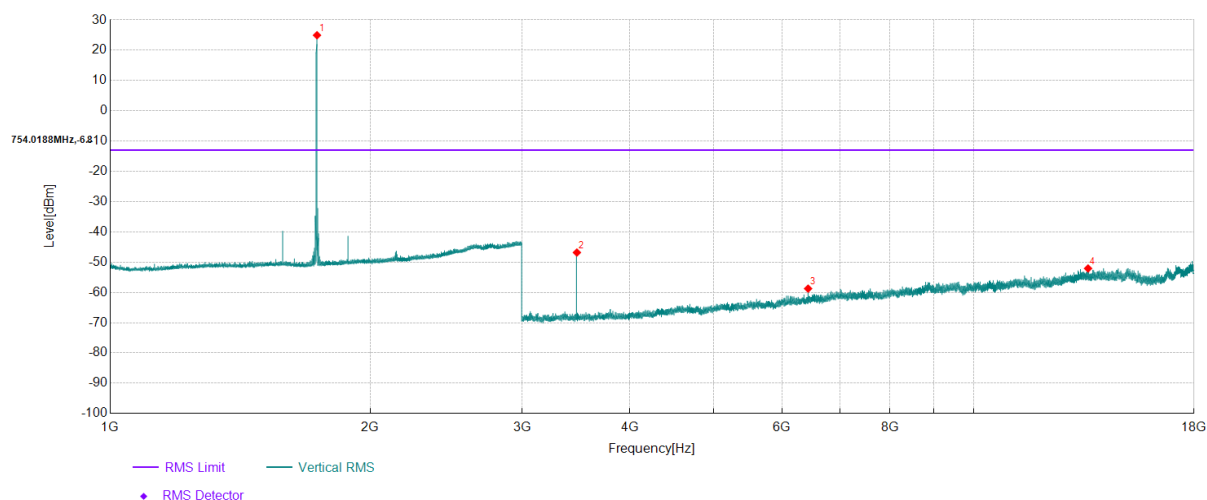


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1736.00	120.41	-95.43	24.98	-	-	Vertical	NA
2	3472.00	59.97	-106.79	-46.82	-13.00	33.82	Vertical	PASS
3	6432.00	38.93	-97.67	-58.74	-13.00	45.74	Vertical	PASS
4	13569.00	34.56	-86.64	-52.08	-13.00	39.08	Vertical	PASS

Project Information

Mode:	Cat M	Band:	85
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

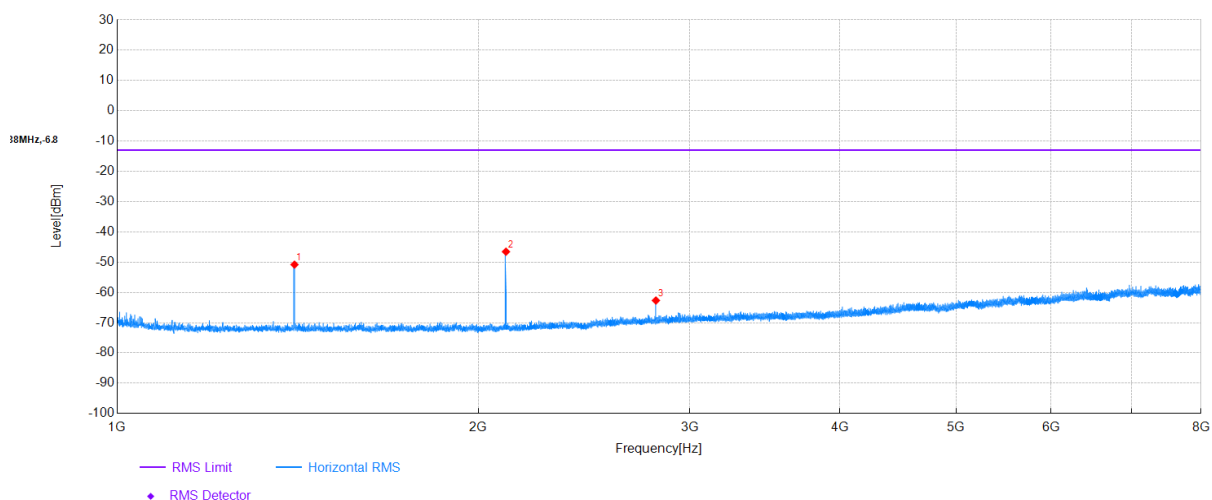


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1405.30	63.09	-113.90	-50.81	-13.00	37.81	Horizontal	PASS
2	2108.33	66.28	-112.82	-46.54	-13.00	33.54	Horizontal	PASS
3	2811.13	46.69	-109.36	-62.67	-13.00	49.67	Horizontal	PASS

Project Information			
Mode:	Cat M	Band:	85
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Dipole		

Test Graph

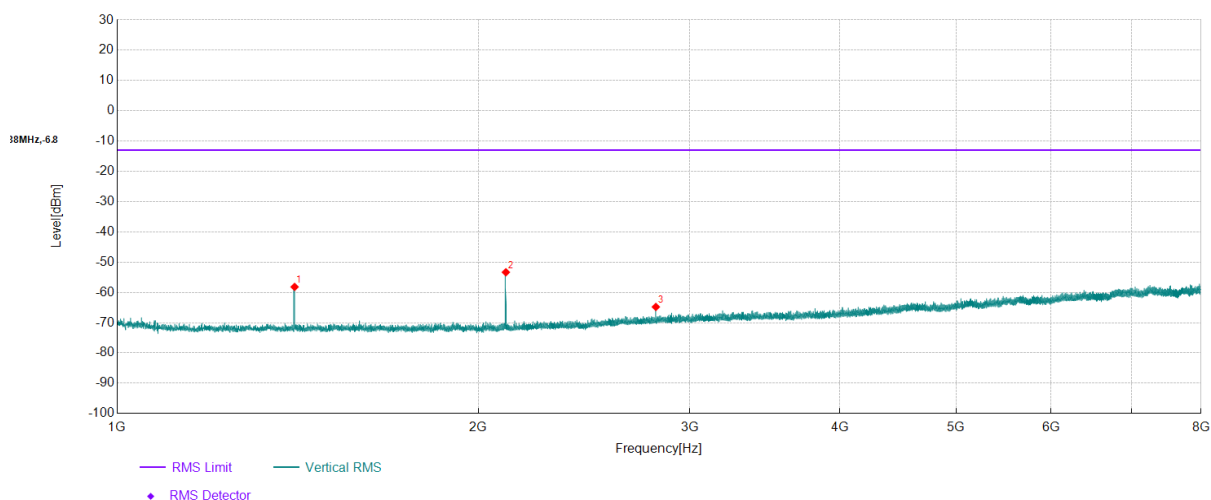


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1405.53	55.72	-113.90	-58.18	-13.00	45.18	Vertical	PASS
2	2108.10	59.49	-112.82	-53.33	-13.00	40.33	Vertical	PASS
3	2810.90	44.57	-109.36	-64.79	-13.00	51.79	Vertical	PASS

Test Result for NTN (Dipole Antenna)

Project Information			
Mode:	NTN	Band:	23
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Dipole		

Test Graph

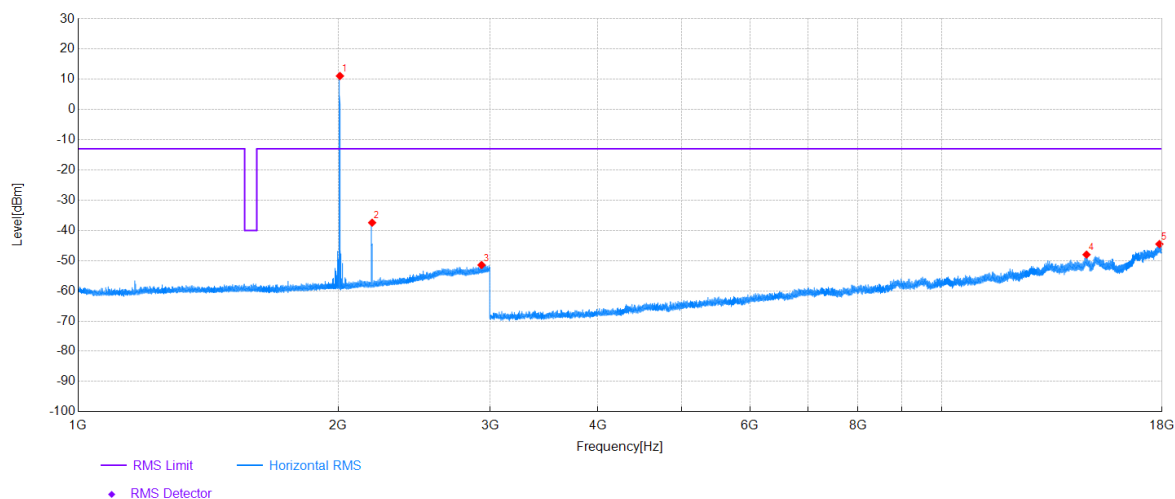


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	2009.90	106.40	-95.27	11.13	-	-	Horizontal	NA
2	2190.20	57.42	-94.85	-37.43	-	-	Horizontal	NA
3	2932.00	39.60	-91.06	-51.46	-13.00	38.46	Horizontal	PASS
4	14717.50	35.88	-83.88	-48.00	-13.00	35.00	Horizontal	PASS
5	17876.00	37.28	-81.80	-44.52	-13.00	31.52	Horizontal	PASS

Project Information

Mode:	NTN	Band:	23
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Dipole		

Test Graph

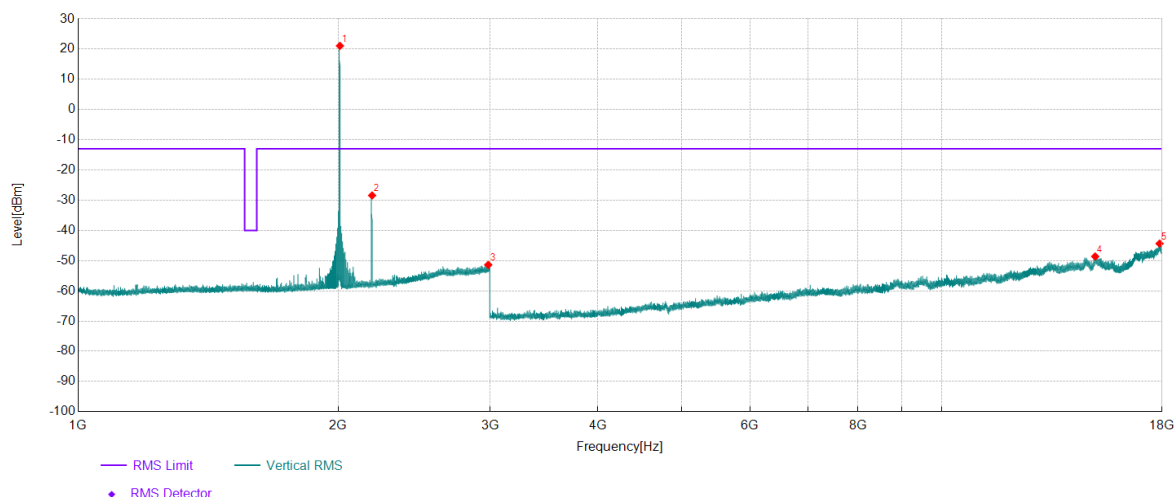


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	2009.90	116.37	-95.27	21.10	-	-	Vertical	NA
2	2189.90	66.43	-94.85	-28.42	-	-	Vertical	NA
3	2984.70	39.62	-91.03	-51.41	-13.00	38.41	Vertical	PASS
4	15060.00	36.52	-85.14	-48.62	-13.00	35.62	Vertical	PASS
5	17883.00	37.33	-81.70	-44.37	-13.00	31.37	Vertical	PASS

Project Information			
Mode:	NTN	Band:	255
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Dipole		


Test Graph

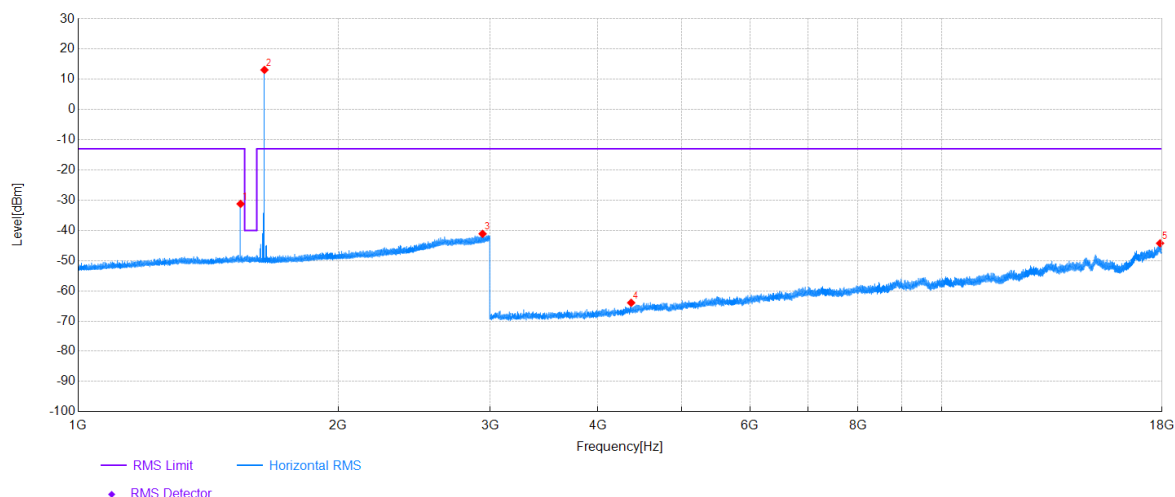

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1542.10	54.45	-85.66	-31.21	-	-	Horizontal	NA
2	1643.50	99.00	-85.87	13.13	-	-	Horizontal	NA
3	2940.30	39.82	-80.94	-41.12	-13.00	28.12	Horizontal	PASS
4	4369.50	39.18	-103.13	-63.95	-13.00	50.95	Horizontal	PASS
5	17907.50	37.28	-81.53	-44.25	-13.00	31.25	Horizontal	PASS

Project Information			
Mode:	NTN	Band:	255
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Dipole		

Test Graph

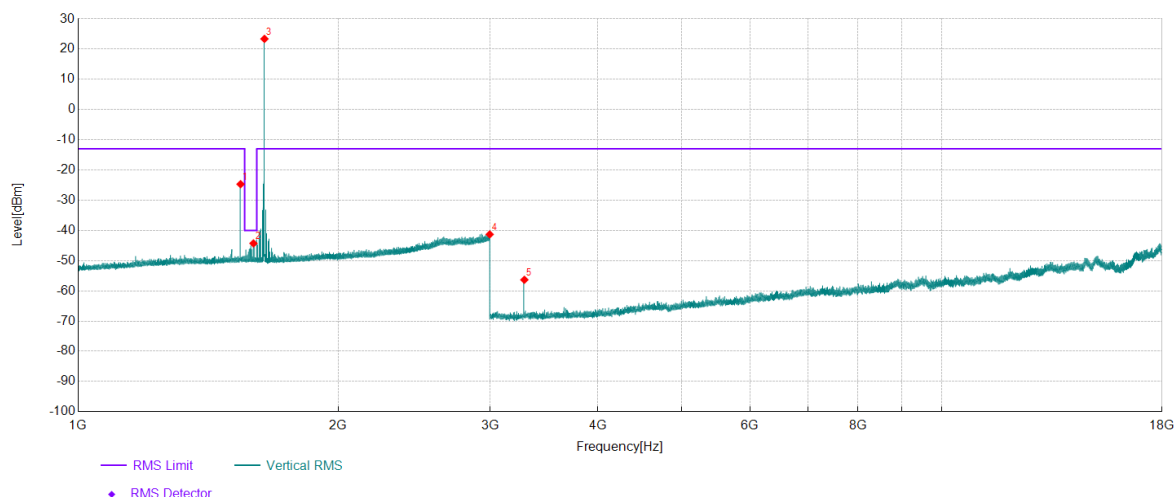


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1542.00	60.97	-85.66	-24.69	-13.00	11.69	Vertical	PASS
2	1596.10	41.48	-85.77	-44.29	-40.00	4.29	Vertical	PASS
3	1643.40	109.28	-85.87	23.41	-	-	Vertical	NA
4	2996.60	39.54	-80.85	-41.31	-13.00	28.31	Vertical	PASS
5	3287.00	50.69	-107.03	-56.34	-13.00	43.34	Vertical	PASS

Test Result for GSM (Omnidirectional Antenna)

Project Information			
Mode:	GSM 850	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		


Test Graph

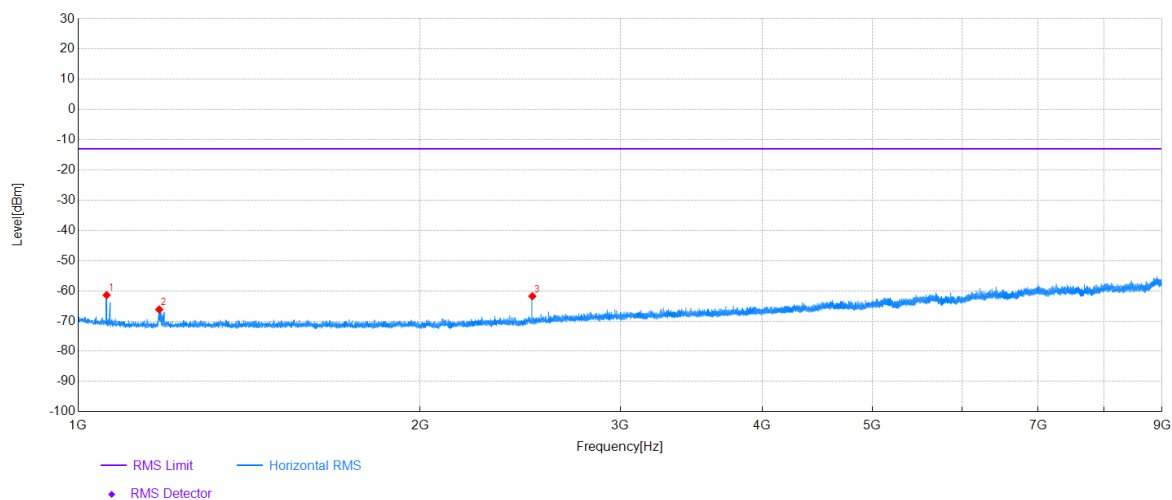

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1059.47	51.98	-113.39	-61.41	-13.00	48.41	Horizontal	PASS
2	1178.67	47.79	-113.97	-66.18	-13.00	53.18	Horizontal	PASS
3	2511.20	49.20	-110.97	-61.77	-13.00	48.77	Horizontal	PASS

Project Information			
Mode:	GSM 850	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		


Test Graph

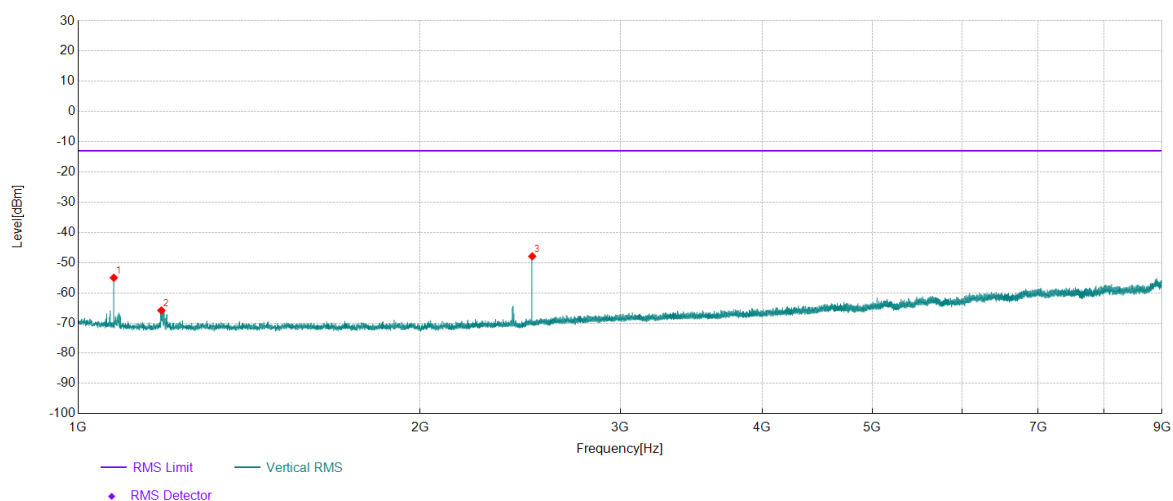

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1074.93	58.56	-113.56	-55.00	-13.00	42.00	Vertical	PASS
2	1183.73	48.16	-113.96	-65.80	-13.00	52.80	Vertical	PASS
3	2510.67	63.08	-110.97	-47.89	-13.00	34.89	Vertical	PASS

Project Information			
Mode:	GSM 1900	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

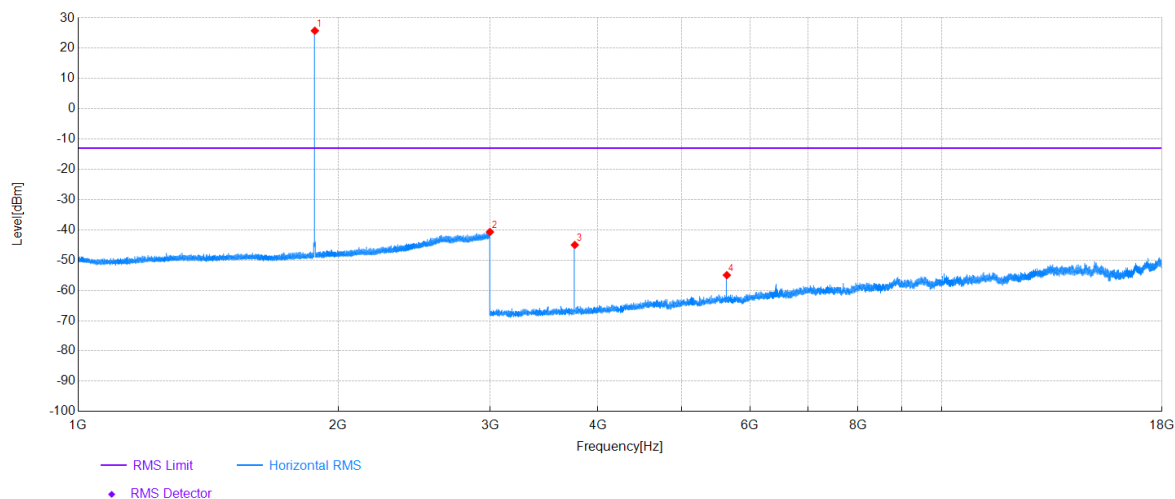


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1880.00	121.00	-95.20	25.80	-	-	Horizontal	NA
2	2998.50	50.41	-91.09	-40.68	-13.00	27.68	Horizontal	PASS
3	3760.00	60.93	-105.90	-44.97	-13.00	31.97	Horizontal	PASS
4	5640.00	45.04	-100.00	-54.96	-13.00	41.96	Horizontal	PASS

Project Information			
Mode:	GSM 1900	Band:	-
Bandwidth	-	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

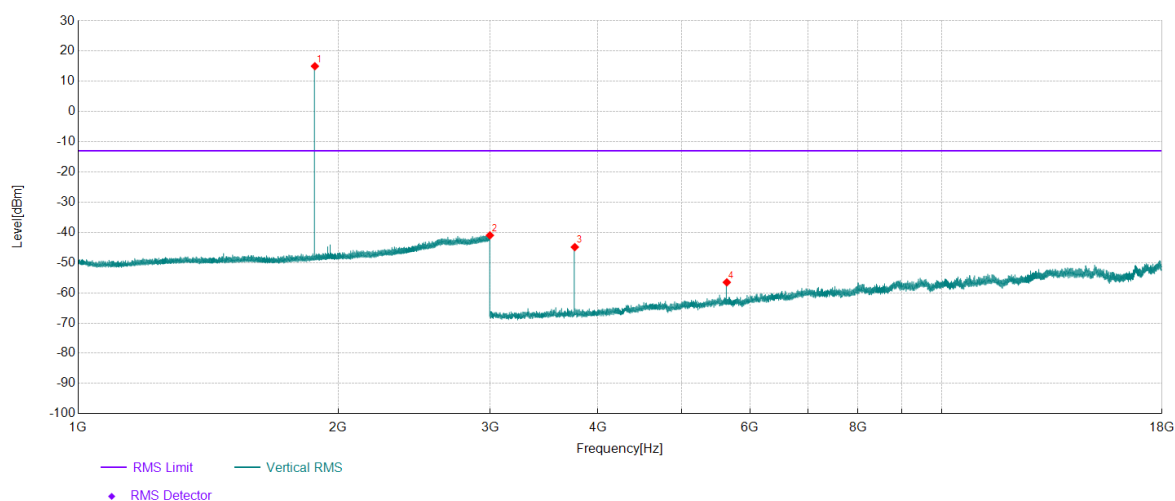


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1880.00	110.23	-95.20	15.03	-	-	Vertical	NA
2	2998.10	50.12	-91.09	-40.97	-13.00	27.97	Vertical	PASS
3	3760.00	61.05	-105.90	-44.85	-13.00	31.85	Vertical	PASS
4	5639.50	43.49	-100.00	-56.51	-13.00	43.51	Vertical	PASS

Test Result for LTE Cat M1 (Omnidirectional Antenna)

Project Information			
Mode:	Cat M	Band:	2
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		


Test Graph

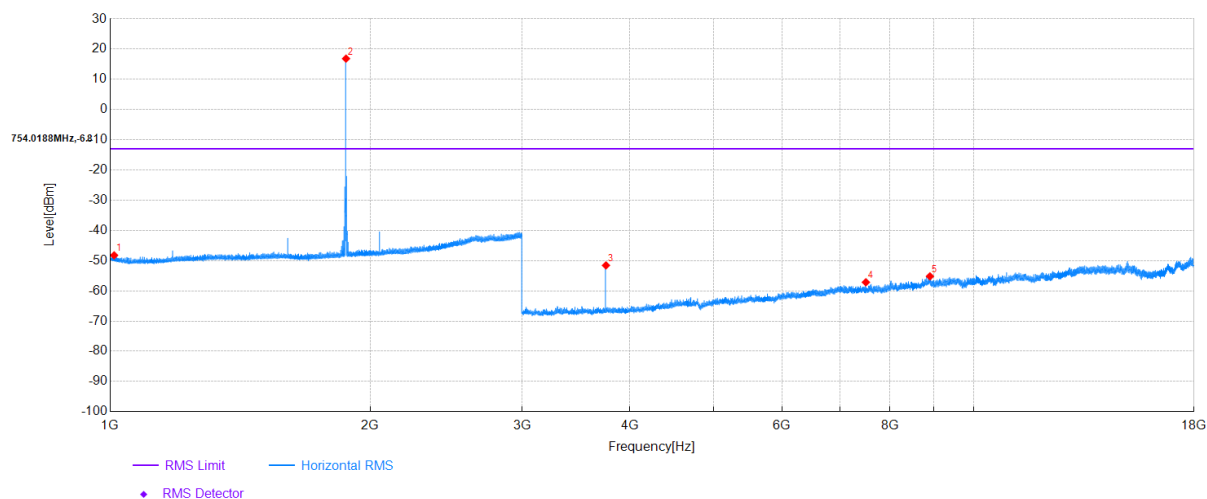

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1010.60	47.18	-95.43	-48.25	-13.00	35.25	Horizontal	PASS
2	1875.70	112.08	-95.21	16.87	-	-	Horizontal	NA
3	3751.50	54.36	-105.93	-51.57	-13.00	38.57	Horizontal	PASS
4	7503.00	38.79	-95.94	-57.15	-13.00	44.15	Horizontal	PASS
5	8900.00	37.45	-92.65	-55.20	-13.00	42.20	Horizontal	PASS

Project Information			
Mode:	Cat M	Band:	2
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

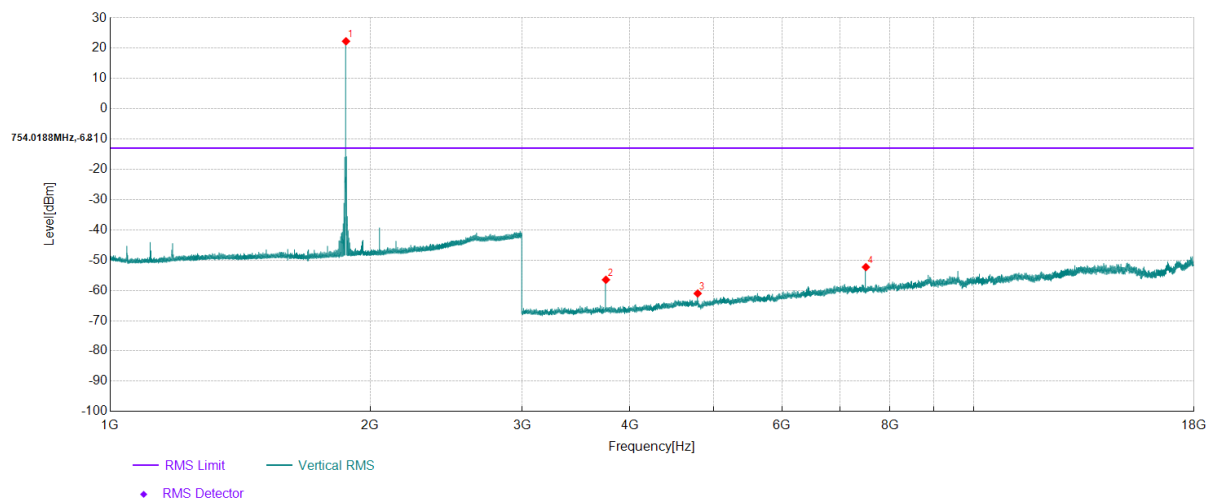


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1875.80	117.53	-95.21	22.32	-	-	Vertical	NA
2	3751.50	49.45	-105.93	-56.48	-13.00	43.48	Vertical	PASS
3	4791.00	40.96	-101.97	-61.01	-13.00	48.01	Vertical	PASS
4	7503.00	43.65	-95.94	-52.29	-13.00	39.29	Vertical	PASS

Project Information

Mode:	Cat M	Band:	4
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

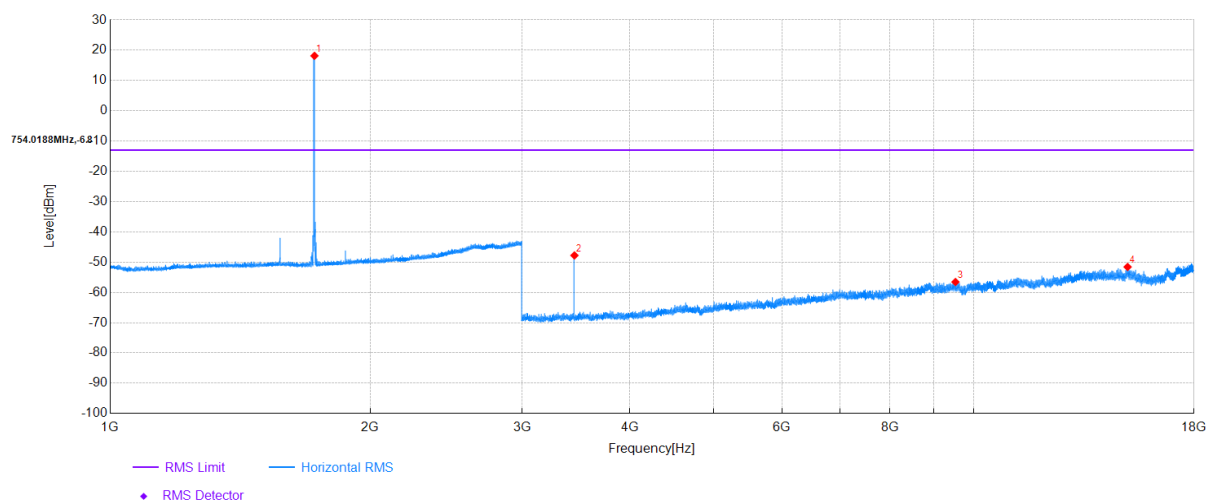


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1724.40	113.64	-95.47	18.17	-	-	Horizontal	NA
2	3449.00	59.06	-106.83	-47.77	-13.00	34.77	Horizontal	PASS
3	9527.50	35.64	-92.18	-56.54	-13.00	43.54	Horizontal	PASS
4	15077.50	33.22	-84.80	-51.58	-13.00	38.58	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	4
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

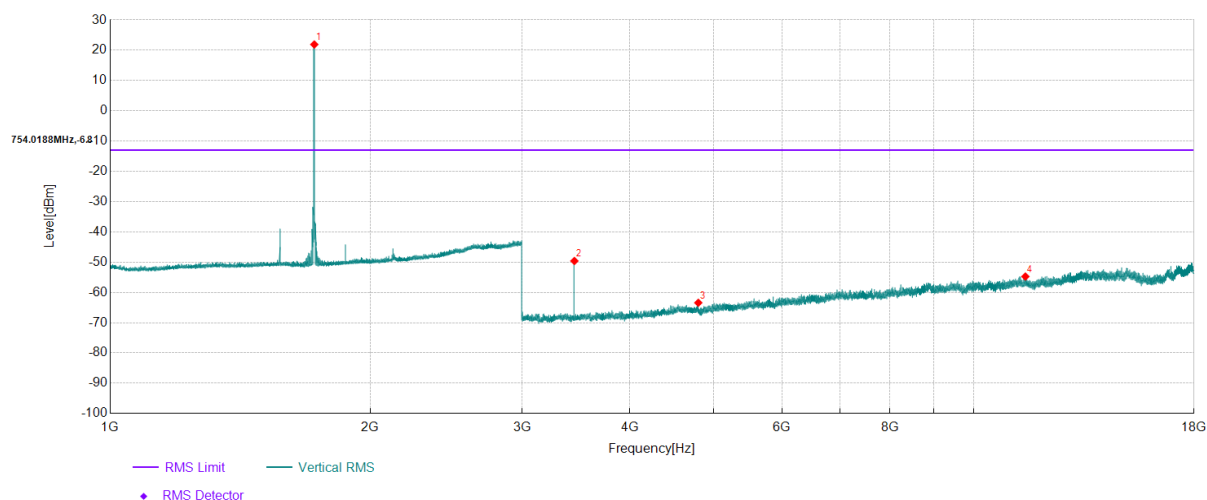


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1723.60	117.39	-95.47	21.92	-	-	Vertical	NA
2	3448.50	57.23	-106.83	-49.60	-13.00	36.60	Vertical	PASS
3	4799.00	38.54	-101.96	-63.42	-13.00	50.42	Vertical	PASS
4	11479.00	34.74	-89.49	-54.75	-13.00	41.75	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	5
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

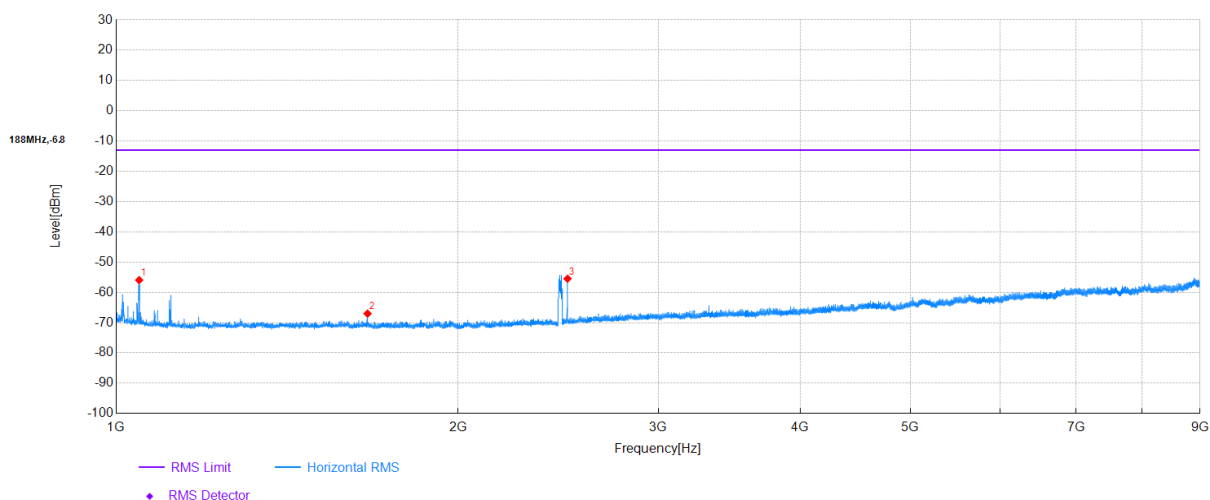


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1047.73	57.33	-113.26	-55.93	-13.00	42.93	Horizontal	PASS
2	1664.53	46.68	-113.68	-67.00	-13.00	54.00	Horizontal	PASS
3	2496.80	55.57	-111.04	-55.47	-13.00	42.47	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	5
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

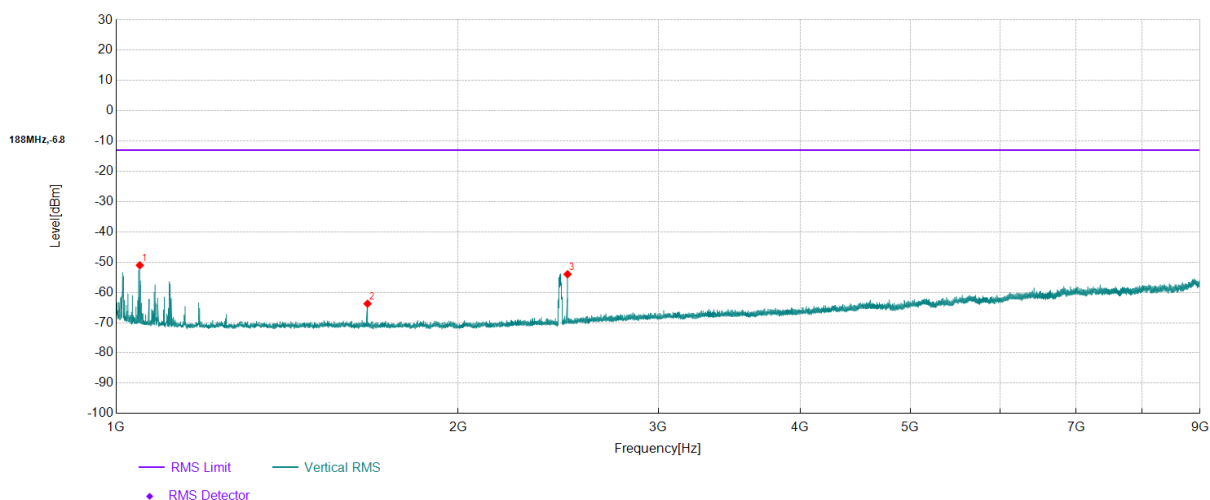


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1049.07	62.25	-113.28	-51.03	-13.00	38.03	Vertical	PASS
2	1664.53	49.95	-113.68	-63.73	-13.00	50.73	Vertical	PASS
3	2496.80	57.06	-111.04	-53.98	-13.00	40.98	Vertical	PASS

Project Information

Mode:	Cat M	Band:	12
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

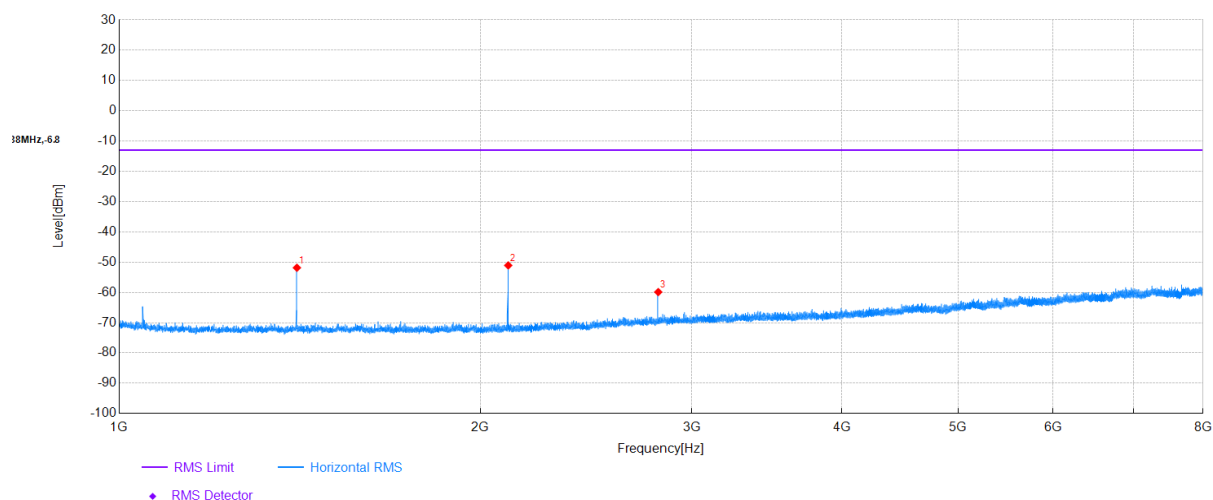


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1406.47	62.05	-113.90	-51.85	-13.00	38.85	Horizontal	PASS
2	2109.50	61.75	-112.82	-51.07	-13.00	38.07	Horizontal	PASS
3	2813.00	49.46	-109.34	-59.88	-13.00	46.88	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	12
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

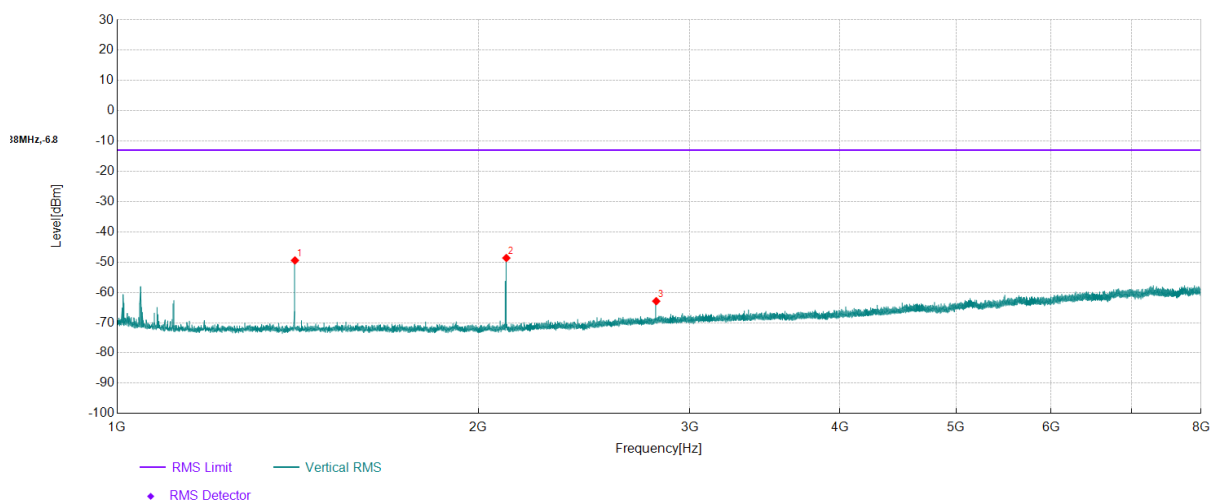


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1406.47	64.47	-113.90	-49.43	-13.00	36.43	Vertical	PASS
2	2109.97	64.20	-112.82	-48.62	-13.00	35.62	Vertical	PASS
3	2813.00	46.45	-109.34	-62.89	-13.00	49.89	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	13
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

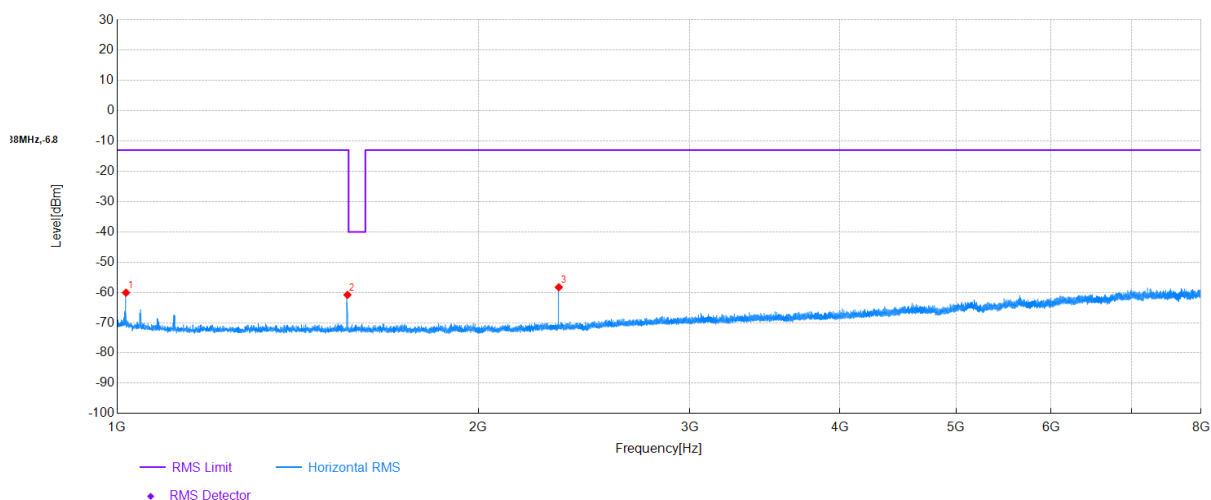


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1017.03	52.73	-112.81	-60.08	-13.00	47.08	Horizontal	PASS
2	1555.57	52.79	-113.60	-60.81	-13.00	47.81	Horizontal	PASS
3	2333.27	53.59	-111.88	-58.29	-13.00	45.29	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	13
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

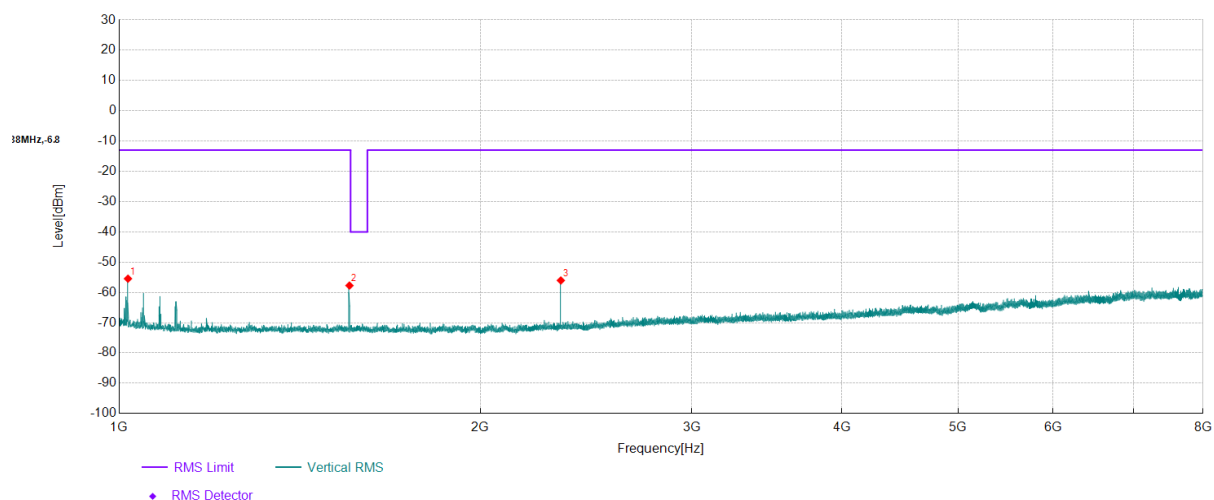


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1017.03	57.35	-112.81	-55.46	-13.00	42.46	Vertical	PASS
2	1555.57	55.87	-113.60	-57.73	-13.00	44.73	Vertical	PASS
3	2333.50	55.83	-111.88	-56.05	-13.00	43.05	Vertical	PASS

Project Information

Mode:	Cat M	Band:	25
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

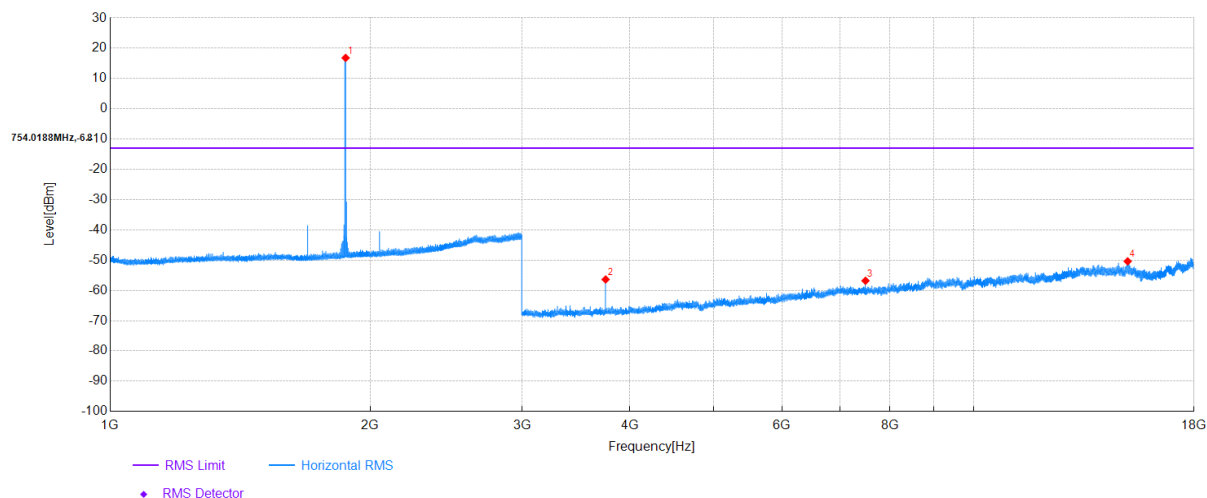


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1873.90	112.05	-95.22	16.83	-	-	Horizontal	NA
2	3748.00	49.56	-105.94	-56.38	-13.00	43.38	Horizontal	PASS
3	7495.50	39.16	-95.96	-56.80	-13.00	43.80	Horizontal	PASS
4	15078.50	34.40	-84.78	-50.38	-13.00	37.38	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	25
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

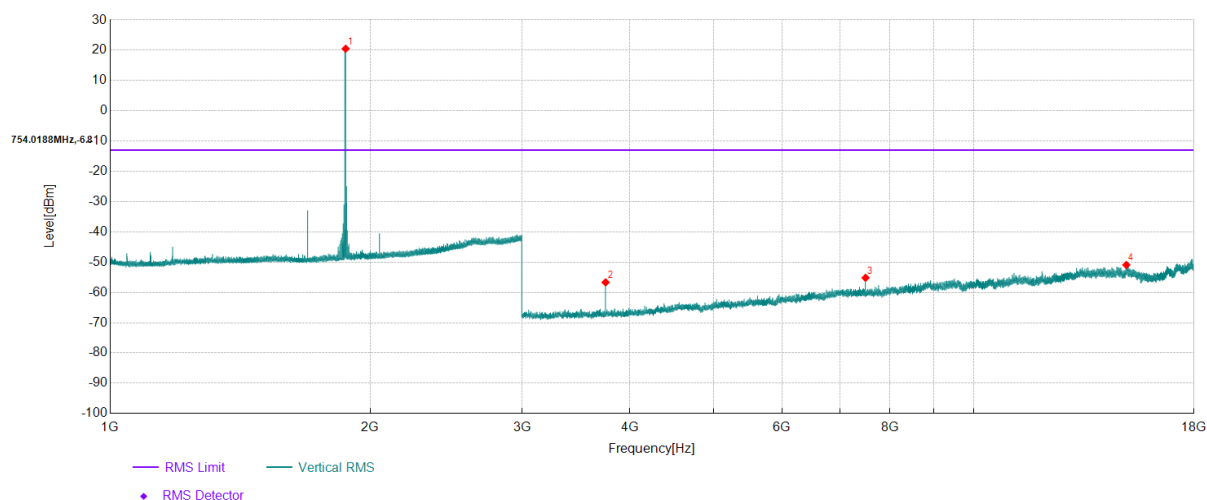


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1873.90	115.73	-95.22	20.51	-	-	Vertical	NA
2	3748.00	49.27	-105.94	-56.67	-13.00	43.67	Vertical	PASS
3	7496.00	40.79	-95.96	-55.17	-13.00	42.17	Vertical	PASS
4	15027.00	34.88	-85.80	-50.92	-13.00	37.92	Vertical	PASS

Project Information			
Mode:	Cat M	Band:	26(824-849)
Bandwidth	15MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		


Test Graph

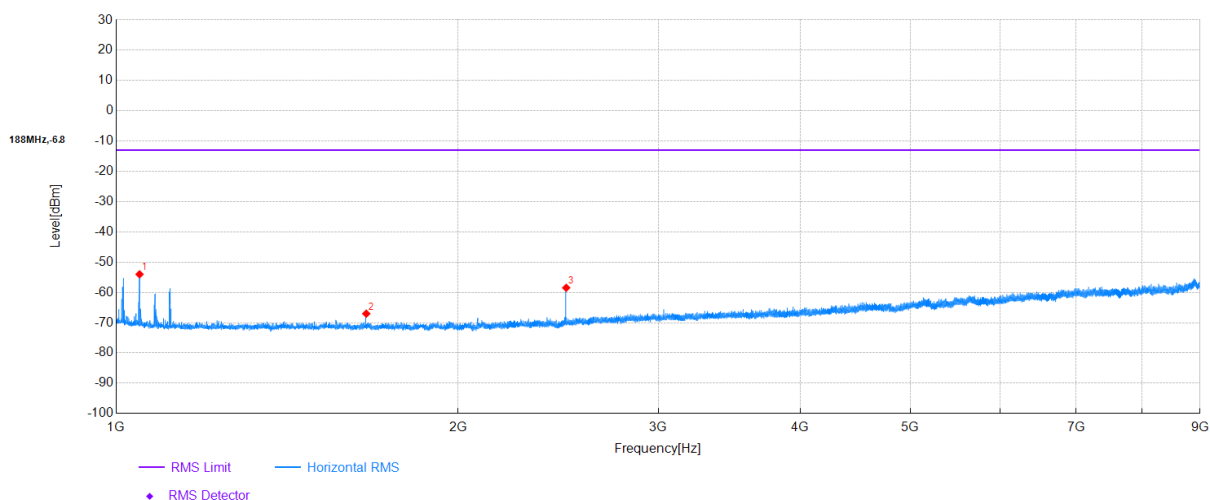

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1048.53	59.27	-113.27	-54.00	-13.00	41.00	Horizontal	PASS
2	1660.27	46.65	-113.67	-67.02	-13.00	54.02	Horizontal	PASS
3	2490.13	52.62	-111.09	-58.47	-13.00	45.47	Horizontal	PASS

Project Information			
Mode:	Cat M	Band:	26(824-849)
Bandwidth	15MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

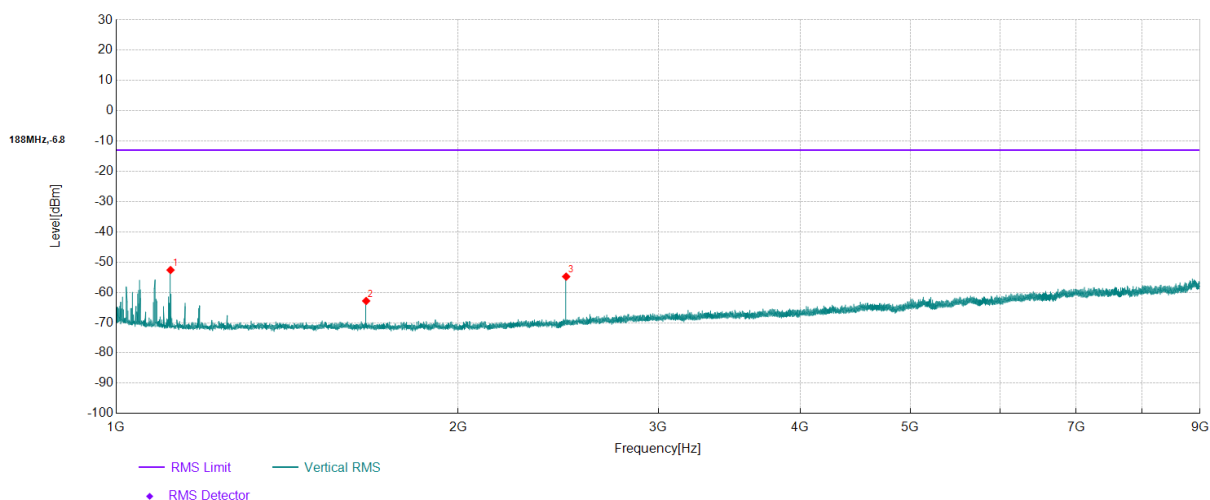


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1116.53	61.29	-113.89	-52.60	-13.00	39.60	Vertical	PASS
2	1660.00	50.86	-113.67	-62.81	-13.00	49.81	Vertical	PASS
3	2489.87	56.32	-111.09	-54.77	-13.00	41.77	Vertical	PASS

Project Information

Mode:	Cat M	Band:	66
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

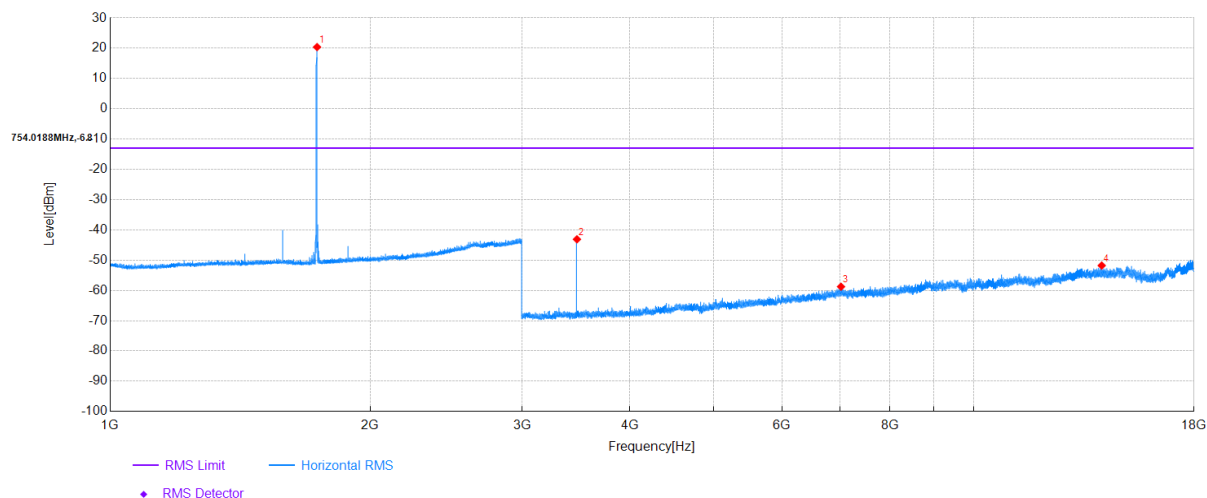


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1736.40	115.83	-95.42	20.41	-	-	Horizontal	NA
2	3472.50	63.67	-106.78	-43.11	-13.00	30.11	Horizontal	PASS
3	7022.00	37.37	-96.14	-58.77	-13.00	45.77	Horizontal	PASS
4	14072.00	34.20	-85.99	-51.79	-13.00	38.79	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	66
Bandwidth	20MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

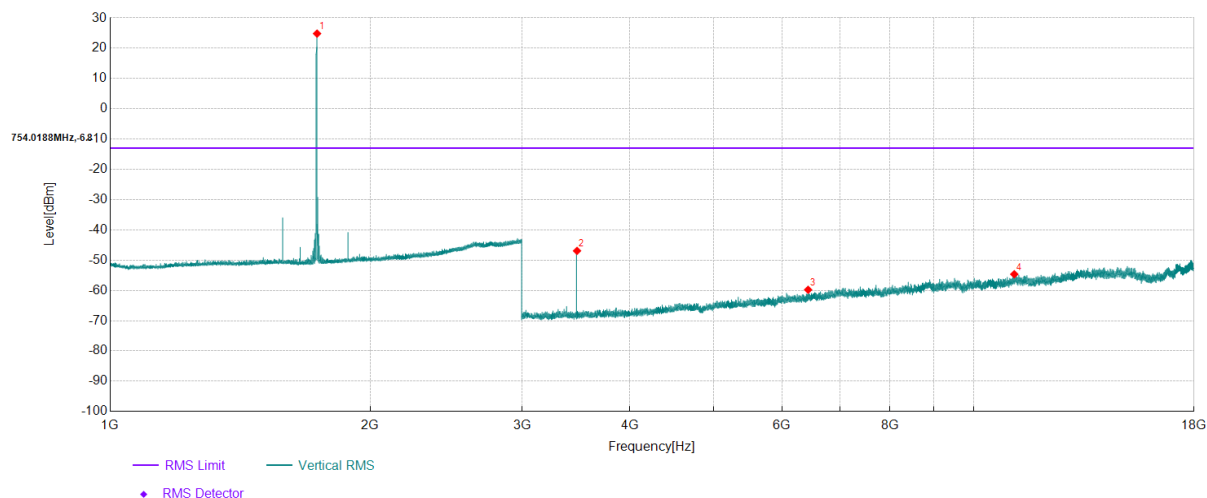


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1736.40	120.28	-95.42	24.86	-	-	Vertical	NA
2	3473.00	59.86	-106.78	-46.92	-13.00	33.92	Vertical	PASS
3	6432.00	37.88	-97.67	-59.79	-13.00	46.79	Vertical	PASS
4	11144.50	35.02	-89.67	-54.65	-13.00	41.65	Vertical	PASS

Project Information

Mode:	Cat M	Band:	85
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

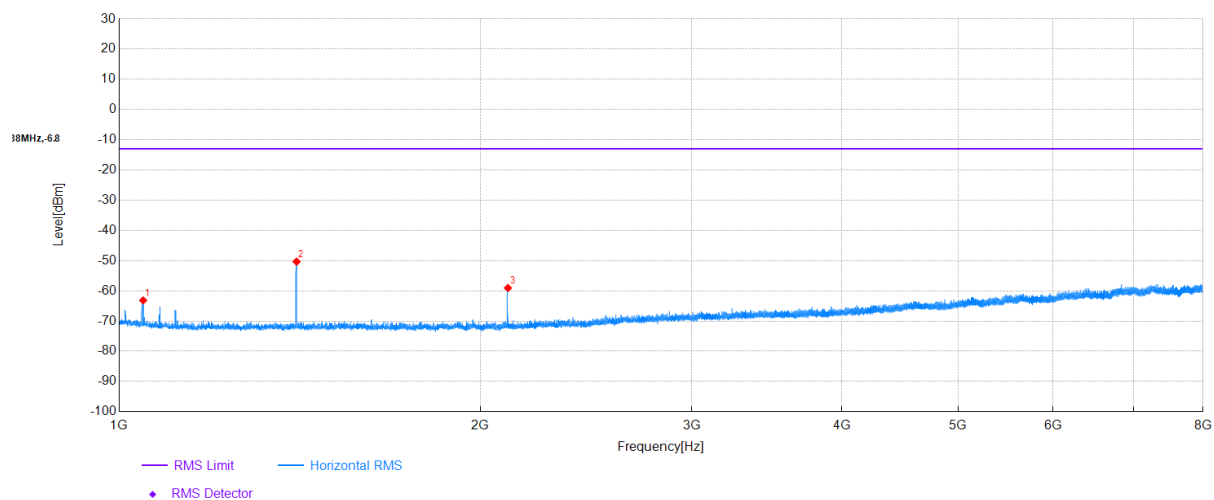


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1047.13	50.09	-113.25	-63.16	-13.00	50.16	Horizontal	PASS
2	1405.53	63.57	-113.90	-50.33	-13.00	37.33	Horizontal	PASS
3	2108.33	53.77	-112.82	-59.05	-13.00	46.05	Horizontal	PASS

Project Information

Mode:	Cat M	Band:	85
Bandwidth	10MHz	Channel	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	ANT: Omnidirectional		

Test Graph

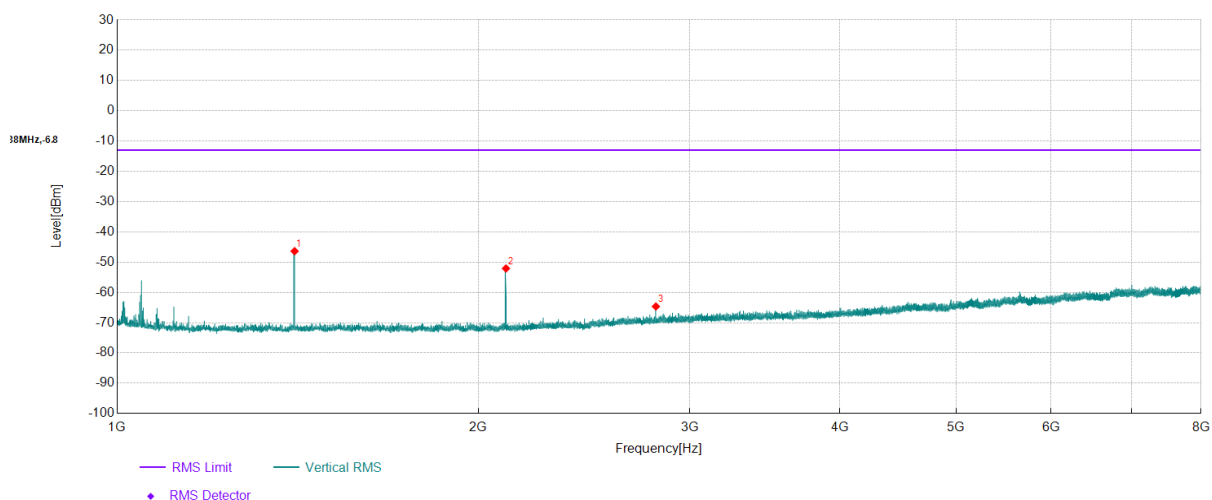


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1405.53	67.53	-113.90	-46.37	-13.00	33.37	Vertical	PASS
2	2108.33	60.74	-112.82	-52.08	-13.00	39.08	Vertical	PASS
3	2811.13	44.72	-109.36	-64.64	-13.00	51.64	Vertical	PASS

Test Result for NTN (Omnidirectional Antenna)

Project Information			
Mode:	NTN	Band:	23
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Omnidirectional		

Test Graph

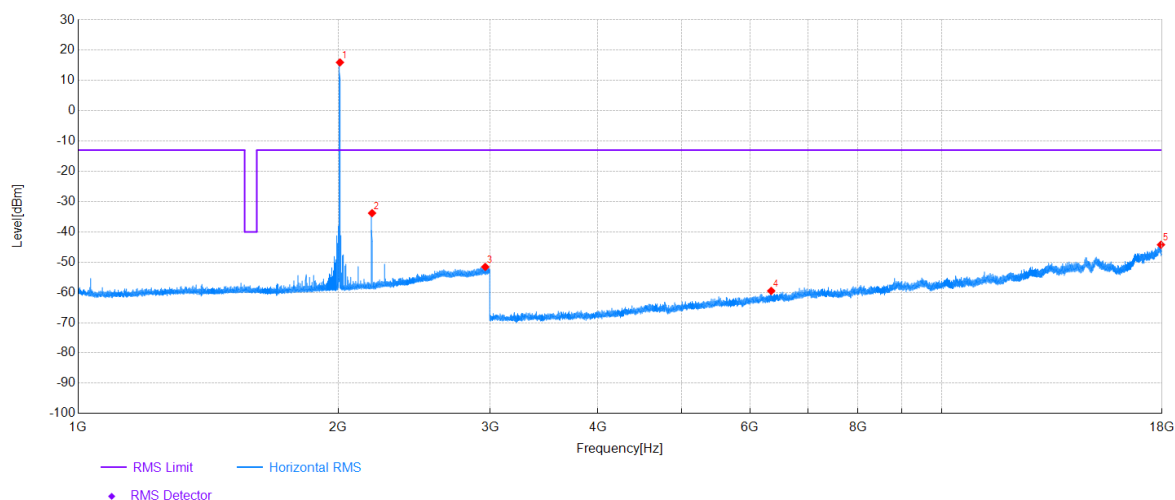


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	2010.10	111.27	-95.27	16.00	-	-	Horizontal	NA
2	2189.70	61.05	-94.85	-33.80	-	-	Horizontal	NA
3	2961.20	39.34	-90.92	-51.58	-13.00	38.58	Horizontal	PASS
4	6347.50	38.48	-97.98	-59.50	-13.00	46.50	Horizontal	PASS
5	17948.50	37.59	-81.83	-44.24	-13.00	31.24	Horizontal	PASS

Project Information

Mode:	NTN	Band:	23
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Omnidirectional		

Test Graph

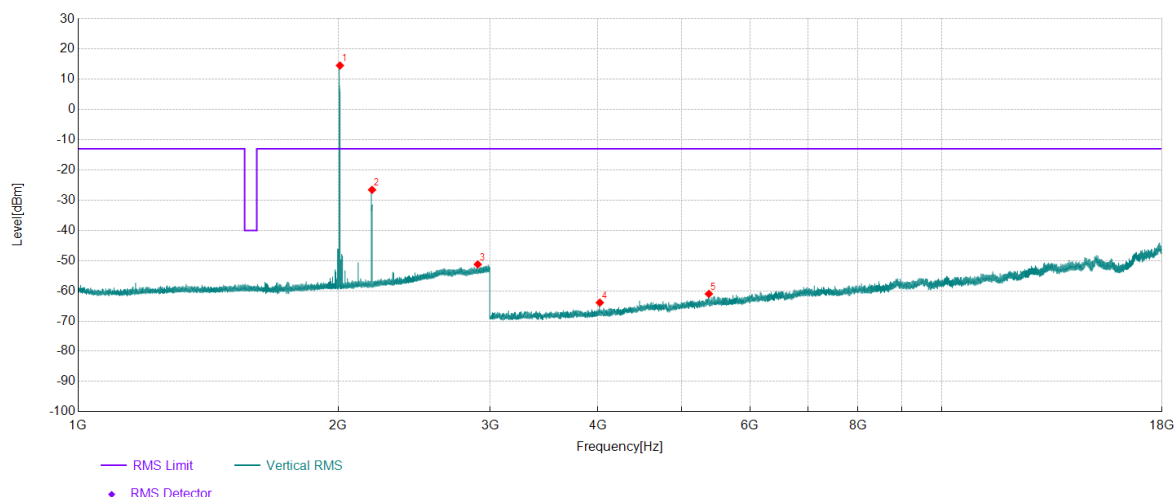


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	2009.90	109.85	-95.27	14.58	-	-	Vertical	NA
2	2189.70	68.29	-94.85	-26.56	-	-	Vertical	NA
3	2902.80	40.12	-91.35	-51.23	-13.00	38.23	Vertical	PASS
4	4019.50	40.93	-104.83	-63.90	-13.00	50.90	Vertical	PASS
5	5375.50	39.59	-100.58	-60.99	-13.00	47.99	Vertical	PASS

Project Information

Mode:	NTN	Band:	255
Bandwidth:	-	Channel:	Mid
IMEI:	862063070036368	Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Omnidirectional		

Test Graph

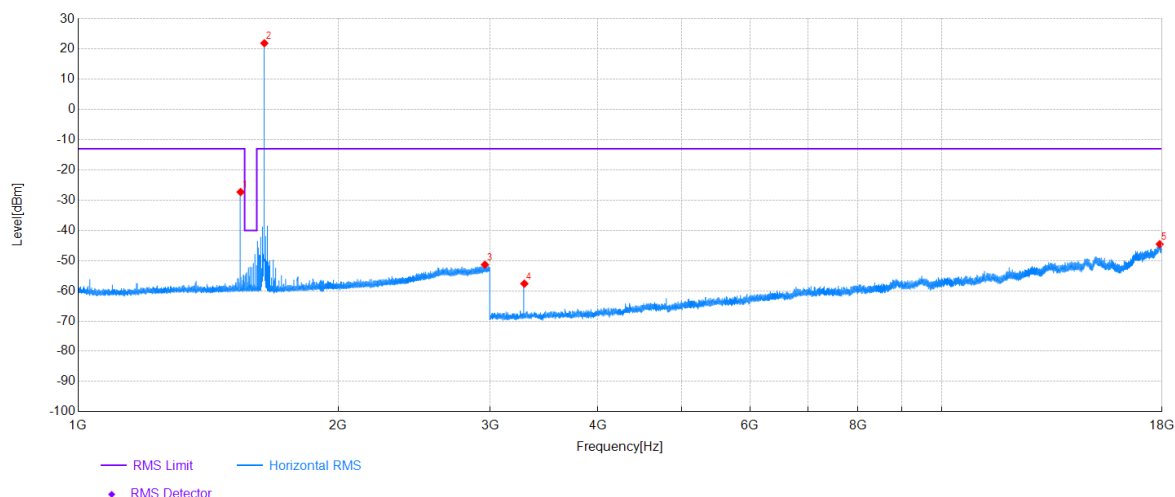


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1542.10	68.03	-95.31	-27.28	-	-	Horizontal	NA
2	1643.10	117.52	-95.55	21.97	-	-	Horizontal	NA
3	2958.50	39.58	-90.91	-51.33	-13.00	38.33	Horizontal	PASS
4	3286.50	49.41	-107.03	-57.62	-13.00	44.62	Horizontal	PASS
5	17888.50	37.09	-81.63	-44.54	-13.00	31.54	Horizontal	PASS

Project Information			
Mode:	NTN	Band:	255
Bandwidth:	-	Channel:	Mid
IMEI:		Engineer:	Tian shuo
Remark:	SCS 3.75;ANT: Omnidirectional		

Test Graph

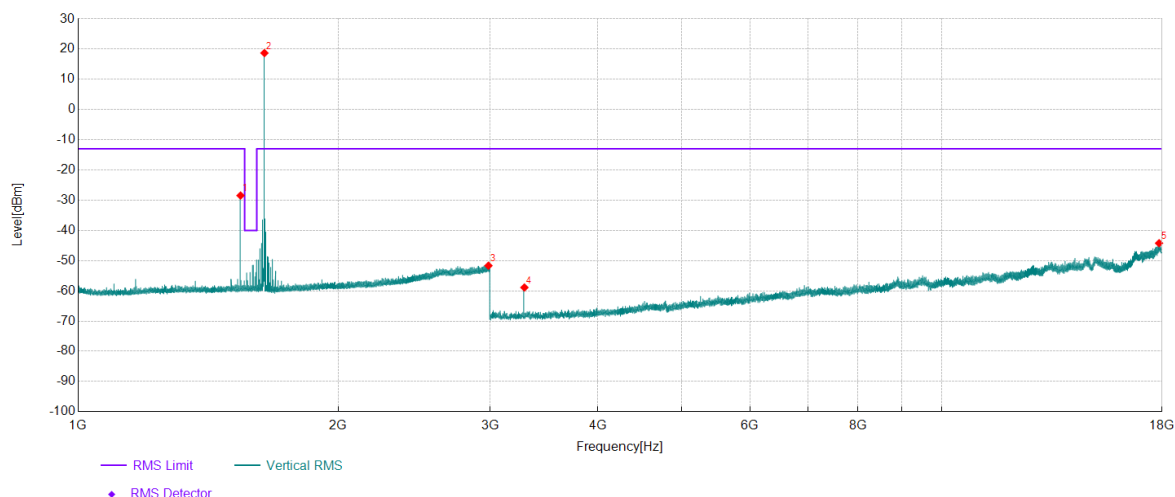

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Verdict
1	1542.00	66.87	-95.31	-28.44	-	-	Vertical	NA
2	1643.40	114.27	-95.55	18.72	-	-	Vertical	NA
3	2986.30	39.37	-91.04	-51.67	-13.00	38.67	Vertical	PASS
4	3287.00	48.14	-107.03	-58.89	-13.00	45.89	Vertical	PASS
5	17858.00	37.81	-82.03	-44.22	-13.00	31.22	Vertical	PASS

~The End~