

TEST REPORT

Applicant: Particle Industries, Inc.

EUT Description: Tachyon

Model: TACH4ROW, TACH8ROW

Brand: Particle

Standards: ETSI EN 303 687 V1.1.1

Date of Receipt: 2025/06/25

Date of Test: 2025/06/25 to 2025/08/27

Date of Issue: 2025/08/28

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



Jim Huang
Approved By:



Carey Chen
Reviewed By:

Revision History

Rev.	Issue Date	Description	Revised by
01	2025/08/28	Original	Carey Chen

Summary of Test Results

Test Item	Test Requirement	Test Method	Result
Nominal centre frequencies/nominal bandwidth	Clause 4.3.1	Clause 5.4.2	Reference report 2406RSU046-E12
RF output power	Clause 4.3.2	Clause 5.4.3	
Power Spectral Density	Clause 4.3.3	Clause 5.4.4	
Transmitter unwanted emissions in the out-of-band domain	Clause 4.3.4.1	Clause 5.4.5	
Transmitter unwanted emissions within the 6 GHz WAS/RLAN band	Clause 4.3.4.3	Clause 5.4.6	
Channel access mechanism	Clause 4.3.6	Clause 5.4.8	
Receiver blocking	Clause 4.3.7	Clause 5.4.9	
Receiver selectivity	Clause 4.3.8	Clause 5.4.10	
Mechanical and electrical design	Clause 4.3.9	Clause 5.4.11	
User Access Restrictions	Clause 4.3.10	Clause 5.4.13	
Transmitter unwanted emissions in the spurious domain	Clause 4.3.4.2	Clause 5.4.5	Pass
Receiver spurious emissions	Clause 4.3.5	Clause 5.4.7	Pass

Remark: In this report the Radiated Spurious Emissions was tested, and the other data please refer to the previous report with report number 2406RSU046-E12 issued by MRT Technology (Suzhou) Co., Ltd.

Reference data from antenna 1, Antenna 2 is shielded through software.

Table of Contents

1	General Description	5
1.1	Lab Information	5
1.1.1	Testing Location	5
1.1.2	Test Facility / Accreditations	5
1.2	Client Information	5
1.2.1	Applicant	5
1.2.2	Manufacturer	5
1.3	Product Information	6
2	Test Configuration	7
2.1	Standards Specification	7
2.2	Test Mode	7
2.3	Test Environment	7
2.4	Support Unit used in test	7
2.5	Test RF Cable	7
2.6	Modifications	7
3	Equipment and Measurement Uncertainty	8
3.1	Test Equipment List	8
3.2	Measurement Uncertainty	8
4	Test Results	9
4.1	Transmitter unwanted emissions in the spurious domain	9
4.2	Receiver spurious emissions	11
5	Test Setup Photos	13
	Appendix	14

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China.

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

1.2 Client Information

1.2.1 Applicant

Applicant:	Particle Industries, Inc.
Address:	548 Market St, PMB 34833, San Francisco, CA 94104, USA

1.2.2 Manufacturer

Manufacturer:	Particle Industries, Inc.
Address:	548 Market St, PMB 34833, San Francisco, CA 94104, USA

1.3 Product Information

EUT Description:	Tachyon				
Model:	TACH4ROW, TACH8ROW				
Brand:	Particle				
Hardware Version:	V1.2				
Software Version:	1.0.160				
IMEI:	863174060029047				
Modulation Type:	802.11ax:	OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM			
Smart System:	<input checked="" type="checkbox"/> SISO:	802.11ax	/		
	<input type="checkbox"/> MIMO	802.11ax	()TX()RX		
EUT Function:	<input checked="" type="checkbox"/> Client	<input type="checkbox"/> Outdoor AP	<input type="checkbox"/> Indoor AP		
Frequency Range:	5945 ~ 6425MHz				
Channel Spacing:	20M Bandwidth Channel:	802.11ax20			
	40M Bandwidth Channel:	802.11ax40			
	80M Bandwidth Channel:	802.11ax80			
	160M Bandwidth Channel:	802.11ax160			
Antenna Type:	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated				
Antenna Gain:	Ant (dBi)				
	1.5				
Remark:	<ol style="list-style-type: none"> The above EUT's information was declared by applicant, please refer to the specifications or user's manual for more detailed description. According to the customer's Letter of model difference, TACH4ROW and TACH8ROW are identical with each other, except for RAM and model number difference. 				

2 Test Configuration

2.1 Standards Specification

Reference Standards	Standards Title
ETSI EN 303 687 V1.1.1	6 GHz WAS/RLAN; Harmonised Standard for access to radio spectrum

2.2 Test Mode

Modulation Type	SISO - Data Rate	CDD/MIMO()TX()RX Data Rate
802.11ax20	MCS0 (8.6 Mbps)	N/A
802.11ax40	MCS0 (17.2 Mbps)	N/A
802.11ax80	MCS0 (36.0 Mbps)	N/A
802.11ax160	MCS0 (72.1 Mbps)	N/A
Transmitting mode:	Keep the EUT was programmed to be in continuously transmitting mode.	
Normal Link:	Keep the EUT operation to normal function.	

2.3 Test Environment

Relative Humidity	45-56 % RH Ambient	
Condition	Temperature(°C)	Voltage(V)
NTNV	25	4.00
LTVN	-20	4.00
HTNV	60	4.00

Remark:

NTNV Normal Temperature Normal Voltage
LTVN Low Temperature Normal Voltage
HTNV High Temperature Normal Voltage

2.4 Support Unit used in test

The EUT has been tested as an independent unit.

2.5 Test RF Cable

For all conducted test items: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

2.6 Modifications

No modifications were made during testing.

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

3.1 Test Equipment List

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1461	2023/06/25	2026/06/24
Double-Ridged Horn Antennas	Schwarzbeck	BBHA 9120D	2814	2023/06/25	2026/06/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1291	2023/06/25	2026/06/24
Signal Analyzer	Keysight	N9020A	US46470366	2025/03/11	2026/03/10
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060274	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP01018050	AP23A8060268	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806249	2025/03/11	2027/03/10
Band Reject Filter Group	Tonscend	JS0806-F	23A806F0654	N/A	N/A
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

3.2 Measurement Uncertainty

Parameter	U _{lab}
Radiation 30MHz~1GHz(FAR)	4.48dB
Radiation 1GHz~18GHz(FAR)	5.30dB
Radiation 18GHz~40GHz(FAR)	5.26dB

Uncertainty figures are valid to a confidence level of 95%

4 Test Results

4.1 Transmitter unwanted emissions in the spurious domain

Test Requirement:	ETSI EN 303 687 Clause 4.3.4.2
Test Method:	ETSI EN 303 687 Clause 5.4.5

Limit:


The level of Transmitter unwanted emissions in the spurious domain shall not exceed the limits given in table 5. In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are ERP for emissions up to 1 GHz and EIRP for emissions above 1 GHz.

Table 5: Transmitter unwanted emission limits in the spurious domain

Frequency range	Maximum power	Measurement bandwidth
30MHz ≤ f < 87.5MHz	-36dBm	100kHz
87.5 MHz ≤ f ≤ 118MHz	-54dBm	100kHz
118MHz < f < 174MHz	-36dBm	100kHz
174MHz ≤ f ≤ 230MHz	-54dBm	100kHz
230MHz < f < 470MHz	-36dBm	100kHz
470MHz ≤ f ≤ 694MHz	-54dBm	100kHz
694MHz < f ≤ 1GHz	-36dBm	100kHz
1GHz < f ≤ 26GHz	-30dBm	1MHz

NOTE: Information in this table is based on ERC Recommendation 74-01 [i.10], annex 2, table 6.

Test Environment:	Refer to section 2.3
Measuring Instruments:	Refer to section 3.1
Test Procedure:	<ol style="list-style-type: none"> 1. The test distance between the receiving antenna and the EUT is 4.6m below 1GHz frequency range, and 3m which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna scanning 1.5m height. 2. The EUT was placed on a turntable with 1.5m height (FAR). 3. Set EUT in continuous transmitting with maximum output power. 4. The table was rotated from 0 to 360 degree to search the highest radiated emission. 5. Repeat above step for each polarization and channel to find the worst emission level. 6. The results obtained are compared to the limits in order to prove compliance with the requirement.
Test Setup:	

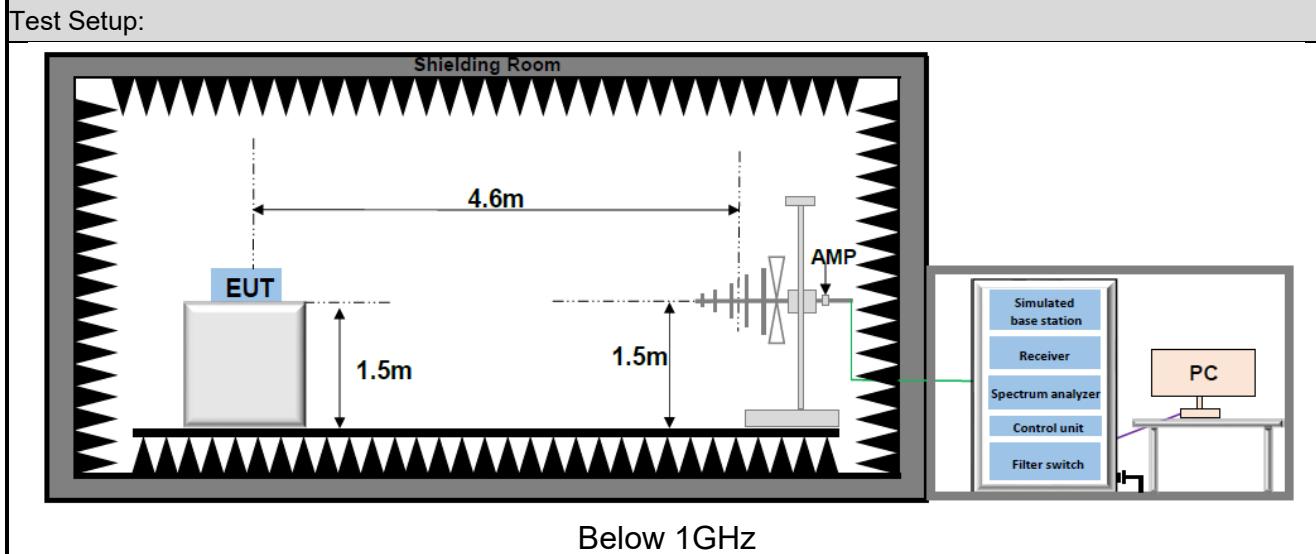

Above 1GHz

Test Result:	Appendix
Remark ¹ :	Radiated spurious emissions were measured from 30MHz to 26GHz. The disturbance between 18GHz to 26GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded.
Remark ² :	Transmitter unwanted emissions in the spurious domain were performed with the EUT set to transmit at the worst-case mode/channel based on power and PSD.

4.2 Receiver spurious emissions

Test Requirement:	ETSI EN 303 687 Clause 4.3.5
Test Method:	ETSI EN 303 687 Clause 5.4.7

Limit:


The receiver spurious emissions shall not exceed the limits given in table 6.

Table 5: Transmitter unwanted emission limits in the spurious domain


Frequency range	Maximum power	Measurement bandwidth
30MHz \leq f $<$ 1GHz	-57dBm	100kHz
1GHz \leq f \leq 26GHz	-47dBm	1MHz

NOTE: Information in this table is based on ERC Recommendation 74-01 [i.10], annex 2, table 6.

Test Environment:	Refer to section 2.3
Measuring Instruments:	Refer to section 3.1
Test Procedure:	<ol style="list-style-type: none"> 1. The test distance between the receiving antenna and the EUT is 4.6m below 1GHz frequency range, and 3m which is in far field test condition for measured frequency above 1GHz, while the receiving (test) antenna scanning 1.5m height. 2. The EUT was placed on a turntable with 1.5m height (FAR). 3. Set EUT in continuous transmitting with maximum output power. 4. The table was rotated from 0 to 360 degree to search the highest radiated emission. 5. Repeat above step for each polarization and channel to find the worst emission level. 6. The results obtained are compared to the limits in order to prove compliance with the requirement.
Test Setup:	

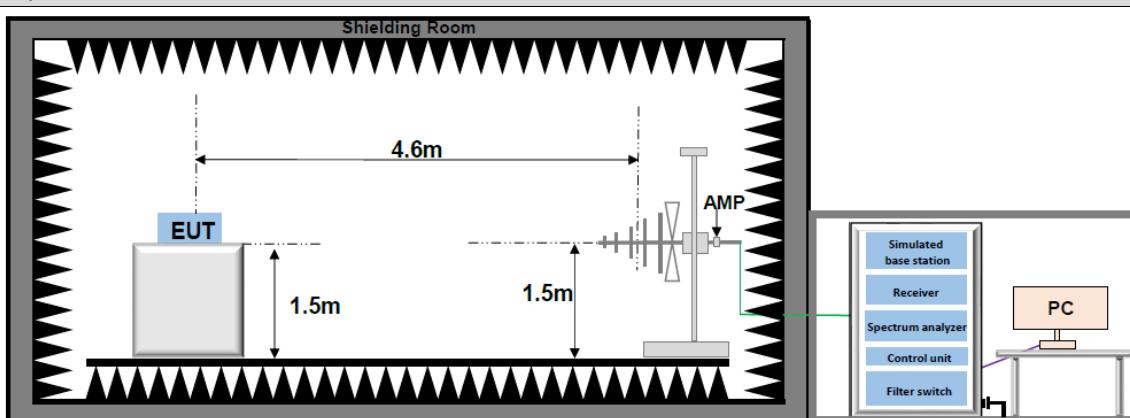

Below 1GHz

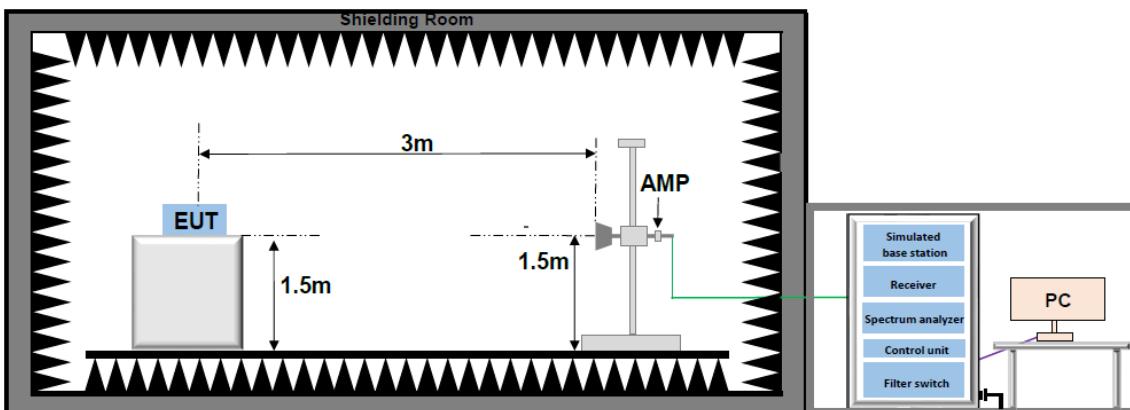

Above 1GHz

Test Result:	Appendix
--------------	----------

Remark:	Radiated spurious emissions were measured from 30MHz to 26GHz. The disturbance between 18GHz to 26GHz was very low. The 18GHz to 26GHz data not be recorded.
---------	--

5 Test Setup Photos




Appendix

Transmitter unwanted emissions in the spurious domain


Project Information			
Mode:	802.11ax20	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	Low
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

Test Graph

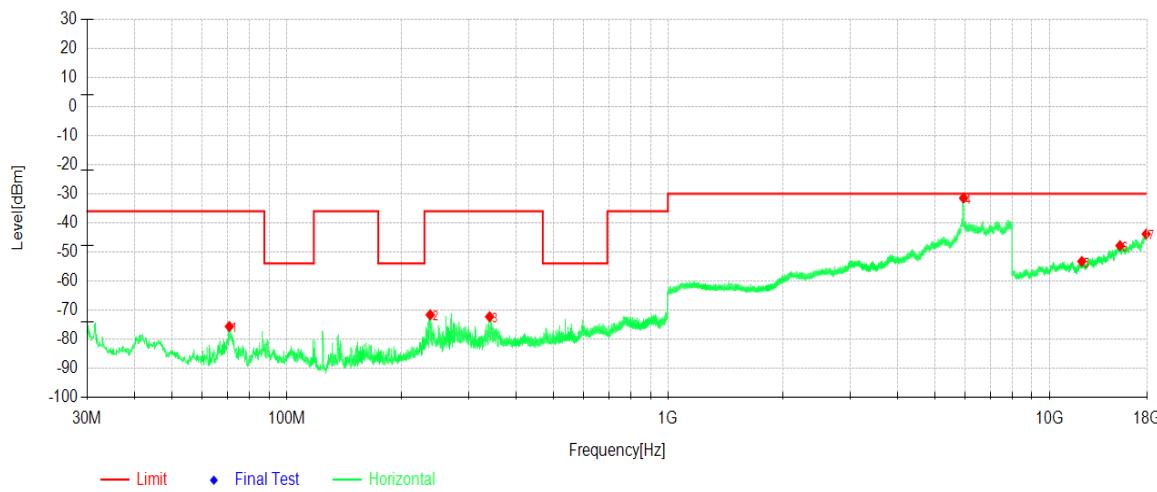


Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	70.84	-57.53	-75.67	-36.00	39.67	-18.14	Horizontal
2	238.09	-60.70	-71.65	-36.00	35.65	-10.95	Horizontal
3	340.82	-62.69	-72.30	-36.00	36.30	-9.61	Horizontal
4	5956.40	-65.93	-31.48	-	-	34.45	Horizontal
5	12164.71	-68.89	-53.28	-30.00	23.28	15.61	Horizontal
6	15314.37	-69.55	-47.87	-30.00	17.87	21.68	Horizontal
7	17939.00	-70.75	-43.87	-30.00	13.87	26.88	Horizontal

Project Information			
Mode:	802.11ax20	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	Low
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

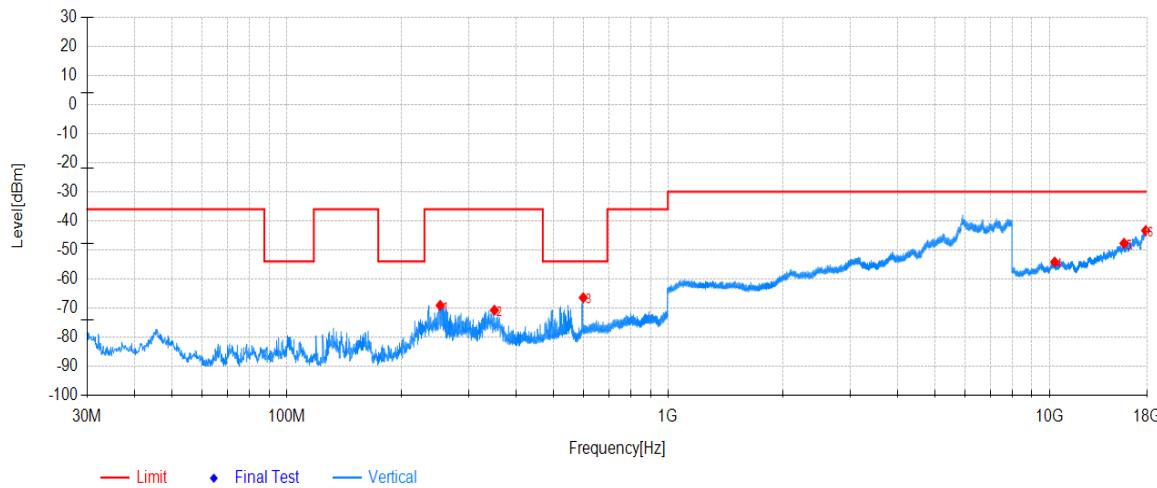Test Graph


Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	252.93	-57.49	-69.11	-36.00	33.11	-11.62	Vertical
2	350.91	-61.79	-70.77	-36.00	34.77	-8.98	Vertical
3	599.93	-63.06	-66.44	-54.00	12.44	-3.38	Vertical
4	10326.62	-68.20	-54.19	-30.00	24.19	14.01	Vertical
5	15701.39	-68.92	-47.74	-30.00	17.74	21.18	Vertical
6	17892.99	-70.46	-43.36	-30.00	13.36	27.10	Vertical

Project Information			
Mode:	802.11ax20.	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	High
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

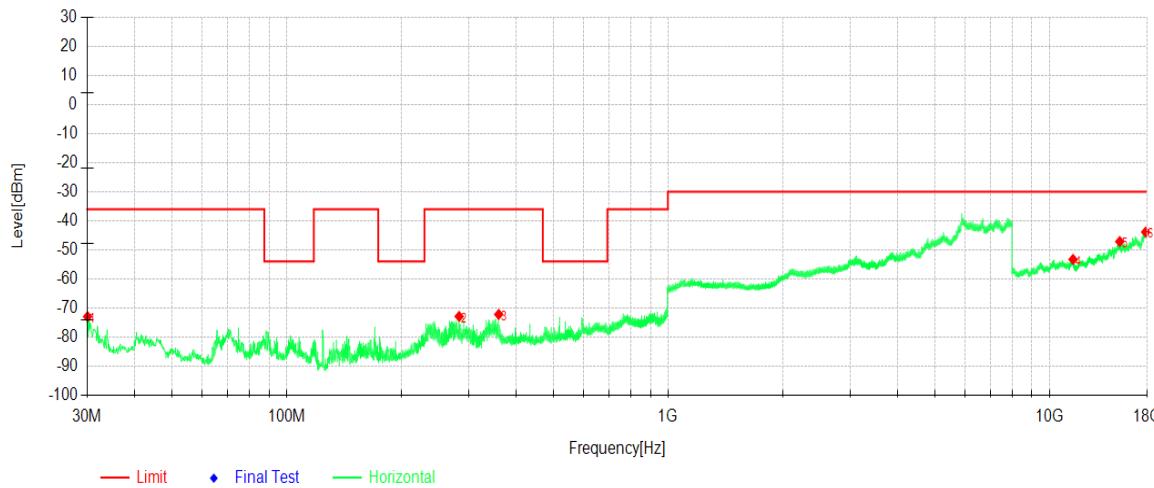Test Graph

Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.10	-62.01	-72.98	-36.00	36.98	-10.97	Horizontal
2	283.58	-62.00	-72.90	-36.00	36.90	-10.90	Horizontal
3	360.03	-63.79	-72.21	-36.00	36.21	-8.42	Horizontal
4	11532.68	-68.89	-53.26	-30.00	23.26	15.63	Horizontal
5	15290.86	-68.78	-47.14	-30.00	17.14	21.64	Horizontal
6	17877.49	-70.61	-43.86	-30.00	13.86	26.75	Horizontal

Project Information			
Mode:	802.11ax20.	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	High
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

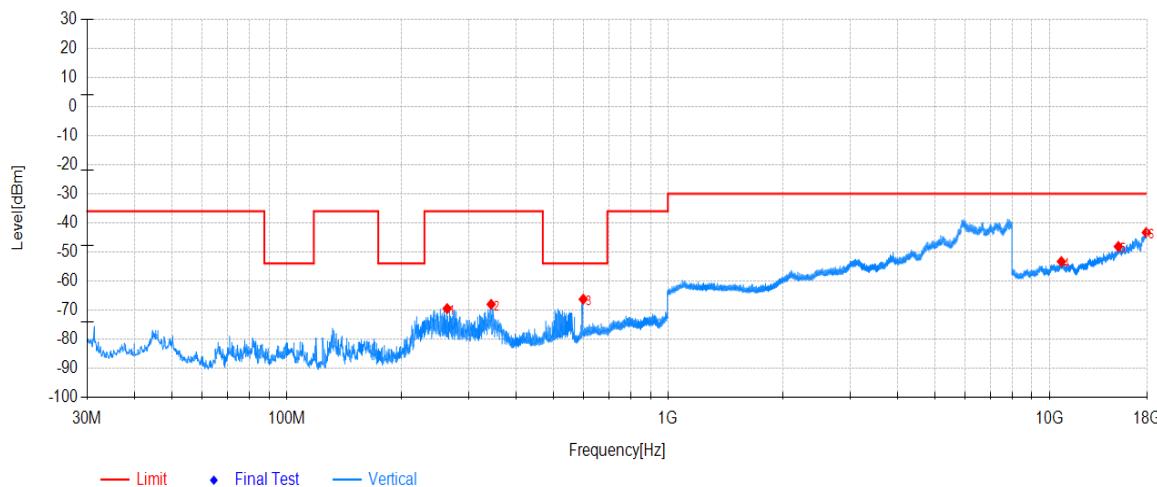
Test Graph

Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	263.79	-57.57	-69.54	-36.00	33.54	-11.97	Vertical
2	344.02	-58.87	-68.05	-36.00	32.05	-9.18	Vertical
3	599.84	-62.89	-66.28	-54.00	12.28	-3.39	Vertical
4	10752.64	-68.47	-53.34	-30.00	23.34	15.13	Vertical
5	15165.36	-69.05	-48.16	-30.00	18.16	20.89	Vertical
6	17950.00	-70.63	-43.32	-30.00	13.32	27.31	Vertical

Receiver spurious emissions (Worst case)


Project Information			
Mode:	802.11ax20	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	Low
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

Test Graph

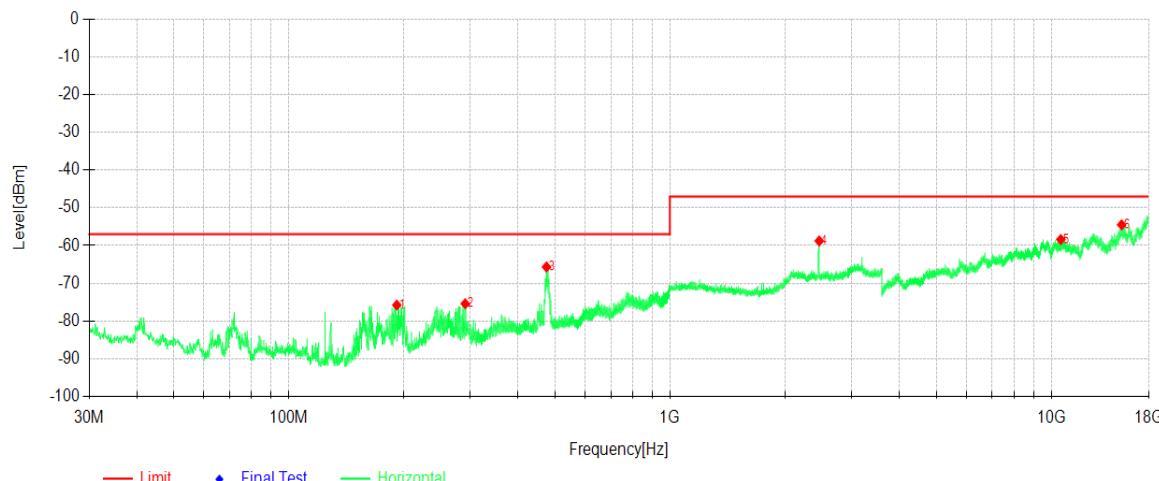

Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	192.30	-61.12	-75.78	-57.00	18.78	-14.66	Horizontal
2	290.57	-64.42	-75.42	-57.00	18.42	-11.00	Horizontal
3	474.79	-59.51	-65.66	-57.00	8.66	-6.15	Horizontal
4	2462.62	-51.87	-58.78	-47.00	11.78	-6.91	Horizontal
5	10587.19	-72.70	-58.39	-47.00	11.39	14.31	Horizontal
6	15279.91	-76.57	-54.51	-47.00	7.51	22.06	Horizontal

Project Information			
Mode:	802.11ax20	Band:	5925~6425MHz
Bandwidth:	20MHz	Channel:	Low
IMEI:	863174060029047	Engineer:	Zhang Weizhi
Remark:			

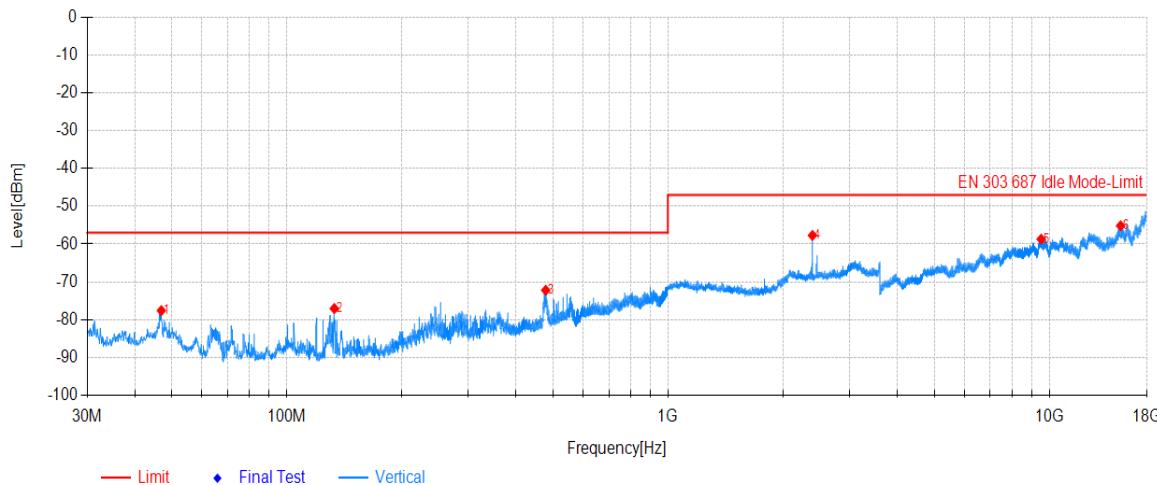Test Graph

Data List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	46.98	-66.47	-77.62	-57.00	20.62	-11.15	Vertical
2	133.51	-60.44	-77.06	-57.00	20.06	-16.62	Vertical
3	478.18	-66.16	-72.22	-57.00	15.22	-6.06	Vertical
4	2392.91	-49.91	-57.71	-47.00	10.71	-7.80	Vertical
5	9515.58	-72.27	-58.70	-47.00	11.70	13.57	Vertical
6	15369.45	-77.17	-55.15	-47.00	8.15	22.02	Vertical

~The End~