



TEST REPORT No.: (5216)033-0360

FCC DoC TEST REPORT

To:	PARTICLE INDUSTRIES, INC	To:	-
Attn:	Eric	Attn:	-
Address:	1400 Tennessee St, #4 San Francisco, CA 94107	Address:	-
Fax:	--	Fax:	-
E-mail:	--	E-mail:	-
Folder No.:	BVCZ16FE005ETHS-B		
Factory Name:	ABO ELECTRONICS (SHENZHEN) CO., LTD		
Location:	Block B3, Haocheng Industrial Park, Hexiu West Rd, Heping Village, Fuyong, Baoan, Shenzhen		
Product:	ELECTRON Model No.: G350 (Brand Name: Particle)		
	Sample No:	HK160129/014	
	Date of Receipt:	December 01, 2015	
	Test Date(s):	January 04, 2016 to January 15, 2016	
	Test Requested:	FCC Part 15 - 2012	
	Test Method:	ANSI C63.4 - 2009	
	DoC No.:	16-014	
The results given in this report are related to the tested specimen of the described electrical apparatus.			
CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart B.			

Assistant Manager,
EMC Department

for Clerk

Name: Law Man Kit
Date: February 04, 2016



TEST REPORT No.: (5216)033-0360

Equipment Under Test:

Product : ELECTRON
Model No. : G350
Power Supply : USB Input: 5Vd.c. /
3.7Vd.c. ("Rechargeable battery" x 1) /
Computer: 117Va.c., 60Hz
Data Cable : 0.5m shielded USB cable
Power Line Cable : --
Accessory Device : --
The highest operating frequency : 1900MHz

Description of Adaptor

Adaptor : --
Model : --
Input : --
Input power line cable : --
Output : --
Output power line cable : --

Additional Product Name:

--

Additional Model No.:

--

Additional Model Information:

--

Description of Test modes:

Charging mode
E-GSM 900MHz link mode
DCS 1800MHz link mode

Report Revision & Sample Re-submit History:

--

Remark: -

For the test results, the EUT had been tested with all conditions. The worst case was showed in test report. The measurement instrumentation uncertainty would be taking into consideration on each of the test result



TEST REPORT No.: (5216)033-0360

Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 – 2012			
Test Condition	Test Method	Test Result	
		Pass	Failed
Conducted Emission Test, 0.15MHz to 30MHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission Test, 30MHz to 18GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>



TEST REPORT No.: (5216)033-0360

DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP20L	FG034A02	CE & FCC DoC Approved
2	MOUSE	DELL	MOA8BO	H0T00H92	CE & FCC DoC Approved
3	PRINTER	HP	HP officejet 6500 (SNPRC-0801-02)	TH062130RV	CE & FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Cable, Non-shielded, with core, 2m
2	DC Cable, Non-shielded, without core, 1.8m
3	USB Cable, Shielded, without core, 1.5m
4	USB Cable, Shielded, without core, 1.5m

NOTE: All power cords of the above support units are non-shielded (0.8m).



TEST REPORT No.: (5216)033-0360

Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

Conformity Assessment Body

Designation Number: HK0009

Test Firm Registration #: 945348

Test Instrument List

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	03-FEB-2016
SIGNAL ANALYZER 40GHZ	ROHDE & SCHWARZ	FSV 40	100977	29-JUN-2016
SPECTRUM ANALYZER	R&S	R3127	111000909	26-APR-2016
LOOP ANTENNA	ETS LINDGREN	6502	00102266	05-NOV-2016
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	02-FEB-2016
HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D-692	25-DEC-2016
WIDEBAND HORN ANTENNA 18 TO 40GHZ	STEATITE	QWH-SL-18-40-K-SG	12688	02-SEP-2016
OPEN AREA TEST SITE	BVCPS	N/A	N/A	18-JUN-2016
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	12-FEB-2016
COAXIAL CABLE	HUBER + SUHNER	RG214	N/A	04-OCT-2016
HIGH FREQUENCY RF CABLE	ROHDE & SCHWARZ	N/A	N/A	03-NOV-2016

Conducted Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCS30	830986/030	20-MAR-2016
LISN	R&S	ENV216	100024	15-SEP-2016

Measurement Uncertainty

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz to 30MHz	2.9dB
Radiated emissions	9kHz to 30MHz	4.2dB
	30MHz to 1GHz	5.0dB
	1GHz to 18GHz	4.9dB

Remarks: -

N/A: Not Applicable or Not Available

**BUREAU VERITAS HONG KONG LIMITED –
Kowloon Bay Office
1/F Pacific Trade Centre,
2 Kai Hing Road, Kowloon Bay,
Kowloon, HONG KONG**
Tel: +852 2331 0888
Fax: +852 2331 0889
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TEST REPORT No.: (5216)033-0360

Test Results

Conducted Emissions (150kHz to 30MHz)

Test Requirement:	FCC Part 15 Section 15.107
Test Method:	ANSI C63.4
Test Limits:	Class B
Test Date(s):	2016-01-04
Temperature:	25.0 °C
Humidity:	67.0 %
Mode of Operation:	Charging mode
Tested Voltage:	Computer: 117Va.c., 60Hz


Test Method:

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

Initial measurements were performed in peak and average detection modes on the live and neutral line, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Location: No. 603, 6/F., Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Shielding Room

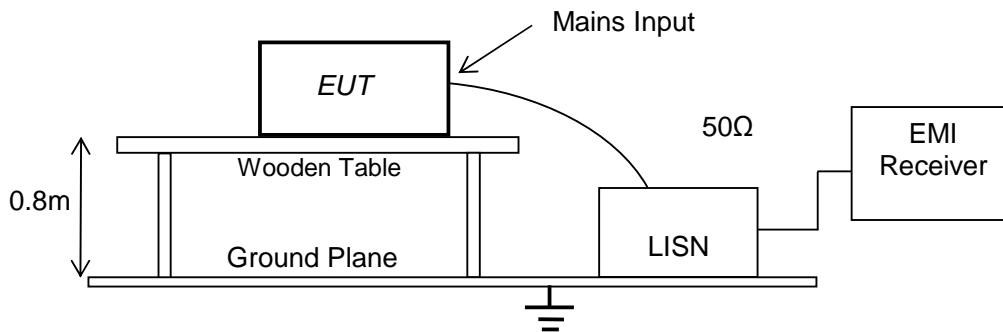


TEST REPORT No.: (5216)033-0360

Measurement Data: Live

Test Result of (Charging mode): PASS

Results and limit lines for Conducted Emission:

Limits for Conducted Emission Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

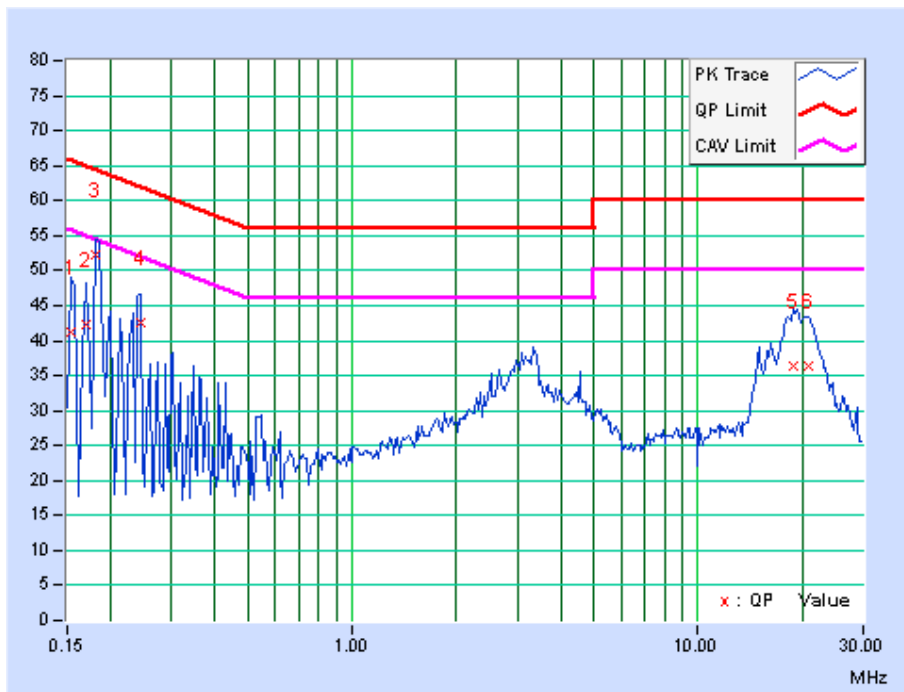



TEST REPORT No.: (5216)033-0360

Results and limit lines for Conducted Emission:

Limits for Conducted Emission Test, please refer to limit lines (Quasi-Peak and Average) in the following tables.

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Margin (dB)	Limit (dB μ V)
0.15391	41.10	9.000	L1	-24.69	65.79
0.16953	42.35	9.000	L1	-22.63	64.98
0.18125	52.19	9.000	L1	-12.23	64.43
0.24375	42.49	9.000	L1	-19.48	61.97
18.82422	36.42	9.000	L1	-23.58	60.00
20.85547	36.23	9.000	L1	-23.77	60.00

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Margin (dB)	Limit (dB μ V)
0.15391	13.66	9.000	L1	-42.13	55.79
0.16953	22.97	9.000	L1	-32.01	54.98
0.18125	38.78	9.000	L1	-15.64	54.43
0.24375	28.10	9.000	L1	-23.87	51.97
18.82422	30.29	9.000	L1	-19.71	50.00
20.85547	32.24	9.000	L1	-17.76	50.00


TEST REPORT No.: (5216)033-0360

Measurement Data: Neutral

Test Result of (Charging mode): PASS

Results and limit lines for Conducted Emission:

Limits for Conducted Emission Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

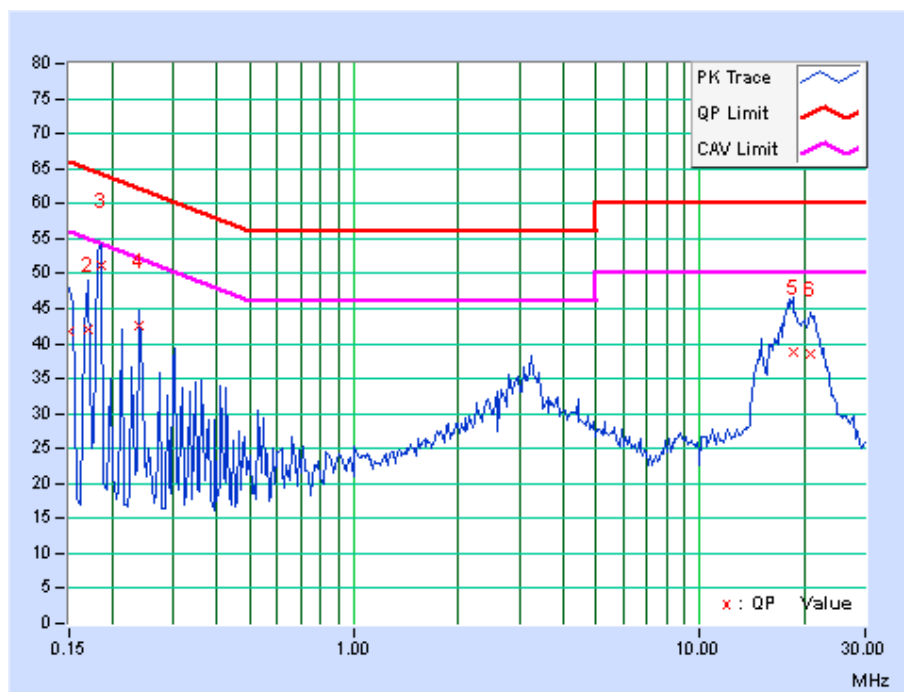



TEST REPORT No.: (5216)033-0360

Results and limit lines for Conducted Emission:

Limits for Conducted Emission Test, please refer to limit lines (Quasi-Peak and Average) in the following tables.

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Margin (dB)	Limit (dB μ V)
0.15000	41.64	9.000	N	-24.36	66.00
0.16953	41.97	9.000	N	-23.01	64.98
0.18516	51.20	9.000	N	-13.05	64.25
0.23984	42.47	9.000	N	-19.63	62.10
18.55859	38.86	9.000	N	-21.14	60.00
20.78125	38.58	9.000	N	-21.42	60.00

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Margin (dB)	Limit (dB μ V)
0.15000	14.20	9.000	N	-41.80	56.00
0.16953	22.33	9.000	N	-32.65	54.98
0.18516	34.99	9.000	N	-19.26	54.25
0.23984	28.44	9.000	N	-23.66	52.10
18.55859	32.16	9.000	N	-17.84	50.00
20.78125	33.69	9.000	N	-16.31	50.00

TEST REPORT No.: (5216)033-0360

Radiated Emissions (30MHz to 18GHz)

Test Requirement: FCC Part 15 Section 15.109
 Test Method: ANSI C63.4
 Test Date(s): 2016-01-15
 Temperature: 25.0 °C
 Humidity: 51.0 %
 Mode of Operation: DCS 1800MHz link mode
 Tested Voltage: 3.7Vd.c. ("Rechargeable battery" x 1)


Test Method:

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

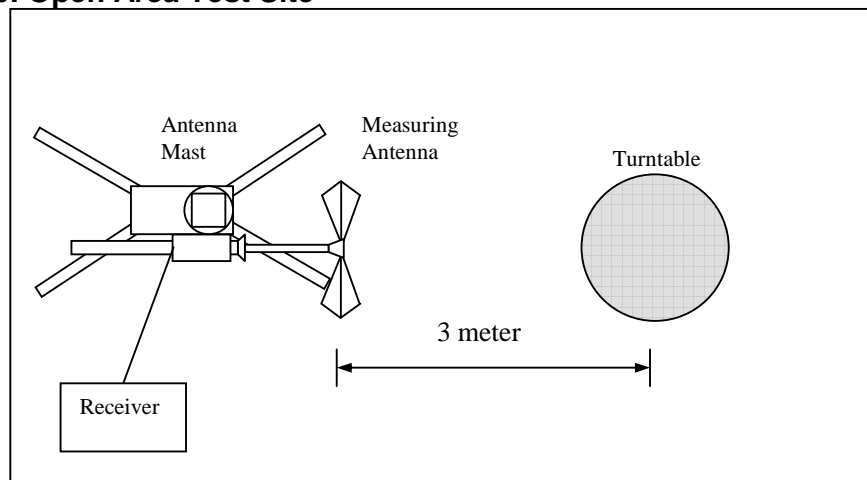



TEST REPORT No.: (5216)033-0360

Limits for Radiated Emission: FCC Part 15.109

Frequency Range [MHz]	Limits [dB μ V/m @ 3m]
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

Measurement Data (30-1000MHz)

Test Result of (DCS 1800MHz link mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
41.25	H	17.77	40.00	-22.23
252.12	H	36.73	46.00	-9.27
384.26	H	26.47	46.00	-19.53
412.38	H	27.04	46.00	-18.96
425.03	H	30.92	46.00	-15.08
479.86	H	28.62	46.00	-17.38

Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
32.81	V	14.54	40.00	-25.46
107.32	V	18.57	43.50	-24.93
159.33	V	15.08	43.50	-28.42
252.12	V	25.50	46.00	-20.50
425.03	V	21.89	46.00	-24.11
440.49	V	22.45	46.00	-23.55

Note: Field Strength includes Ant-nna Factor and Cable Loss.



TEST REPORT No.: (5216)033-0360

Measurement Data (1-18GHz)

Test Result of (DCS 1800MHz link mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
2184.00	H	42.70	74.00	-31.30
2770.00	H	44.60	74.00	-29.40
4521.00	H	45.80	74.00	28.20
2013.00	V	40.50	74.00	-33.50
3024.00	V	44.80	74.00	-29.20
4033.00	V	45.60	74.00	-28.40

Detection mode: Average


Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
2184.00	H	28.30	54.00	-25.70
2770.00	H	31.40	54.00	-22.60
4521.00	H	32.60	54.00	-21.40
2013.00	V	26.40	54.00	-27.60
3024.00	V	31.50	54.00	-22.50
4033.00	V	33.10	54.00	-20.90

Note: Field Strength includes Antenna Factor and Cable Loss.

TEST REPORT No.: (5216)033-0360

Photographs of EUT

External View of the product

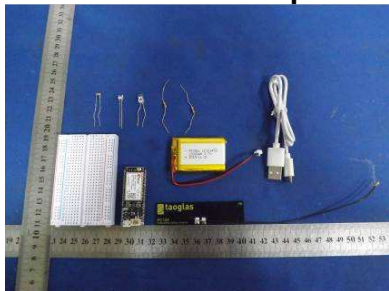


External View of the product



Top View of the product



Bottom View of the product

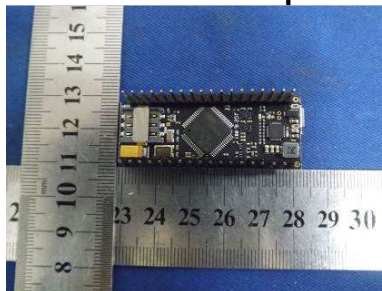

TEST REPORT No.: (5216)033-0360

Measurement of Conducted Emission Test Set Up



TEST REPORT No.: (5216)033-0360

Measurement of Radiated Emission Test Set Up



****** End of Report ******