



BUREAU VERITAS

Test Report No.: RM2106WDG0248



Certificate # 2951.01

# TEST REPORT

Applicant:	Particle Industries, Inc
Address:	126 Post St, 4th floor, San Francisco, CA 94108 USA

Manufacturer or Supplier	Particle Industries, Inc	
Address	126 Post St, 4th floor, San Francisco, CA 94108 USA	
Product	802.11b/g/n WICED Module	
Brand Name	Particle	
Model	P1	
Additional Model & Model Difference	WM-N-BM-14-S	
Date of tests	Jun. 17, 2021 ~ Aug. 04, 2021	

The submitted sample of the above equipment has been tested according to the requirements of the following standards:

- EN 301 489-1 V2.2.3 (2019-11)
- EN 301 489-17 V3.2.4 (2020-09)

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Andy Zhu Supervisor / EMC Department	Approved by Madison Luo Assistant Manager / EMC Department
	Date: Aug. 24, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# Table of Contents

RELEASE CONTROL RECORD .....	4
1 SUMMARY OF TEST RESULTS .....	5
1.1 MEASUREMENT UNCERTAINTY .....	5
2 GENERAL INFORMATION.....	6
2.1 GENERAL DESCRIPTION OF EUT.....	6
2.2 DESCRIPTION OF TEST MODE.....	7
2.3 GENERAL DESCRIPTION OF APPLIED STANDARD.....	7
2.4 DESCRIPTION OF SUPPORT UNIT .....	7
3 EMISSION TEST.....	8
3.1 CONDUCTED EMISSION MEASUREMENT .....	8
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	8
3.1.2 TEST INSTRUMENTS.....	8
3.1.3 TEST PROCEDURE.....	9
3.1.4 DEVIATION FROM TEST STANDARD.....	9
3.1.5 TEST SETUP.....	9
3.1.6 EUT OPERATING CONDITIONS .....	9
3.1.7 TEST RESULTS .....	10
3.2 RADIATED EMISSION MEASUREMENT .....	12
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	12
3.2.2 TEST INSTRUMENTS.....	14
3.2.3 TEST PROCEDURE.....	15
3.2.4 DEVIATION FROM TEST STANDARD.....	16
3.2.5 TEST SETUP.....	17
3.2.6 EUT OPERATING CONDITIONS .....	17
3.2.7 TEST RESULTS (BELOW 1GHZ) .....	18
3.2.8 TEST RESULTS (ABOVE 1GHZ).....	20
4 IMMUNITY TEST.....	21
4.1 GENERAL DESCRIPTION .....	21
4.1.1 GENERAL PERFORMANCE CRITERIA DESCRIPTION .....	21
4.2 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD).....	23
4.2.1 TEST SPECIFICATION .....	23
4.2.2 TEST INSTRUMENT .....	23
4.2.3 TEST PROCEDURE.....	24
4.2.4 DEVIATION FROM TEST STANDARD.....	24
4.2.5 TEST SETUP.....	25
4.2.6 TEST RESULTS .....	26
4.3 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS) .....	28
4.3.1 TEST SPECIFICATION .....	28
4.3.2 TEST INSTRUMENT .....	28
4.3.3 TEST PROCEDURE.....	29
4.3.4 DEVIATION FROM TEST STANDARD.....	29
4.3.5 TEST SETUP.....	29
4.3.6 TEST RESULTS .....	30



5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	31
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	35



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RM2106WDG0248	Original Release	Aug. 24, 2021



## 1 SUMMARY OF TEST RESULTS

After estimating all the combination of every test mode, the result shown as below is the worst case.

The EUT has been tested according to the following specifications.

EMISSION			
Standard	Test Type	Result	Remark
EN 55032:2015, CLASS B	Conducted Test	PASS	Meets limits minimum passing margin is -9.38dB at 0.42450MHz
	Radiated test (30MHz~1GHz)	PASS	Meets limits minimum passing margin is -4.51 dB at 45.035 MHz
	Radiated Test (1GHz ~ 6GHz)	PASS	Meets Limits Minimum passing margin is -14.30 dB at 1847.00 MHz

IMMUNITY			
Standard	Test Type	Result	Remark
EN 61000-4-2:2009	Electrostatic discharge immunity test	PASS	Meets the requirements of Performance Criterion A
EN 61000-4-3:2006 + A1:2008 + A2:2010	Radiated, radio-frequency, electromagnetic field immunity test	PASS	Meets the requirements of Performance Criterion A

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Conducted emission	150kHz ~ 30MHz	+/- 3.05 dB
Radiated emissions	30MHz~1GHz	+/- 4.00 dB
	1GHz ~ 6GHz	+/- 5.17 dB



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	802.11b/g/n WICED Module
<b>MODEL NO.</b>	P1
<b>ADDITIONAL MODEL</b>	WM-N-BM-14-S
<b>POWER SUPPLY</b>	DC 3.3V
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>OPERATING FREQUENCY</b>	2.400GHz-2.4835GHz for 11b/g/n(HT20)
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

#### NOTES:

1. For a more detailed features description, please refer to the product specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions, and only the worst case was shown in this test report.
3. Please refer to the EUT photo document (Reference No.: 2106WDG0248) for detailed product photo.
4. Additional model WM-N-BM-14-S is identical with the test model P1 except the model no. for trading purpose.



## 2.2 DESCRIPTION OF TEST MODE

The EUT was tested under the **WIFI Link** mode for all tests.

## 2.3 GENERAL DESCRIPTION OF APPLIED STANDARD

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**EN 301 489-1 V2.2.3 (2019-11)**

**EN 301 489-17 V3.2.4 (2020-09)**

EN 55032:2015+A11:2020, CLASS B

EN 61000-4-2:2009

EN 61000-4-3:2006 + A1:2008 + A2:2010

**Note:** The above EN basic standards are applied with latest version if customer has no special requirement.

The EUT is without AC input function and therefore the test items Conducted Emission, Harmonic, Flicker, EFT, Surge, CS and Dip were not tested.

## 2.4 DESCRIPTION OF SUPPORT UNIT

The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Wireless Router	TP-LINK	TL-WDR3310	1240431130	N/A
2	Notebook	DELL	Inspiron 14 N4030	3J9WVP1	N/A
3	Notebook	ALIENWARE	ALIENWARE 13 R2	2015AP3711	N/A
4	Notebook	DELL	Latitude 5280	CZFTNH2	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 0.8m;
2	AC Mains:Unshielded,Detachable 0.8m; DC Line: Unshielded, Detachable 1.0m
3	AC Mains:Unshielded,Detachable 0.8m; DC Line: Unshielded, Detachable 1.0m
4	AC Mains:Unshielded,Detachable 0.8m; DC Line: Unshielded, Detachable 1.0m



### 3 EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Notes:** (1) The lower limit shall apply at the transition frequencies.  
 (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 07,22
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 07,22
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 07,22
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Sep. 17,21
Test software	ADT	ADT Cond V7.3.7	N/A	N/A

- NOTES:** 1. The test was performed in shielded room 553.  
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.






### 3.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.5 TEST SETUP

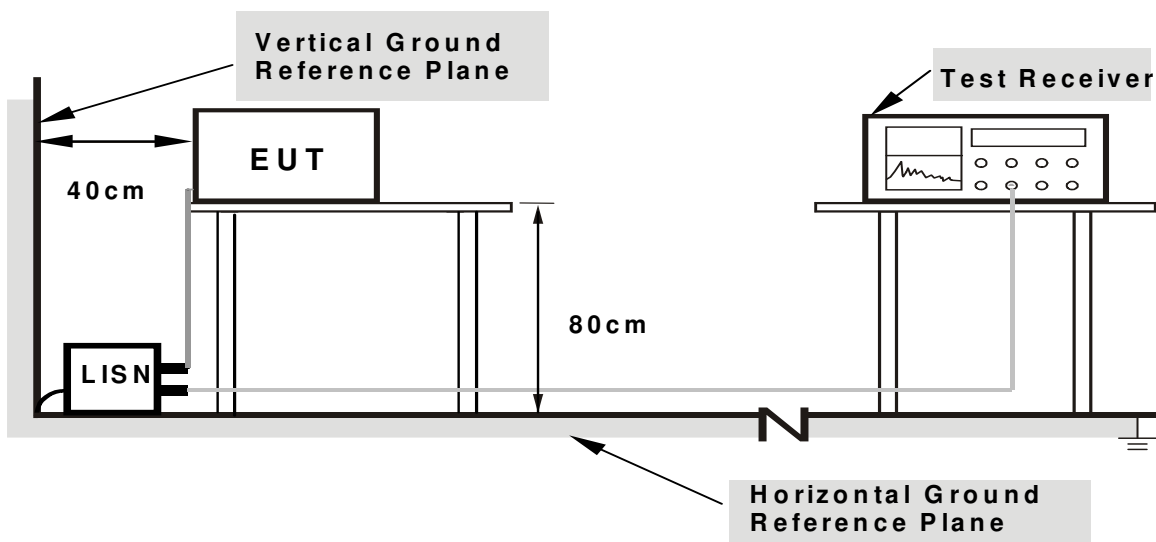

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




### 3.1.7 TEST RESULTS

<b>TEST MODE</b>	WIFI Link	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 3.3V	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 62% RH	<b>TESTED BY</b>	Ming Bai

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16093	9.77	27.29	21.94	37.06	31.71	65.42	55.42	-28.36	-23.71
2	0.21688	9.79	34.14	24.46	43.93	34.25	62.94	52.94	-19.01	-18.69
3	0.24167	9.80	33.74	24.79	43.54	34.59	62.04	52.04	-18.50	-17.45
4	0.42410	9.85	29.07	24.14	38.92	33.99	57.37	47.37	-18.44	-13.37
5	2.45625	9.85	24.99	18.70	34.84	28.55	56.00	46.00	-21.16	-17.45
6	2.93550	9.86	23.62	18.43	33.48	28.29	56.00	46.00	-22.52	-17.71

- REMARK:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

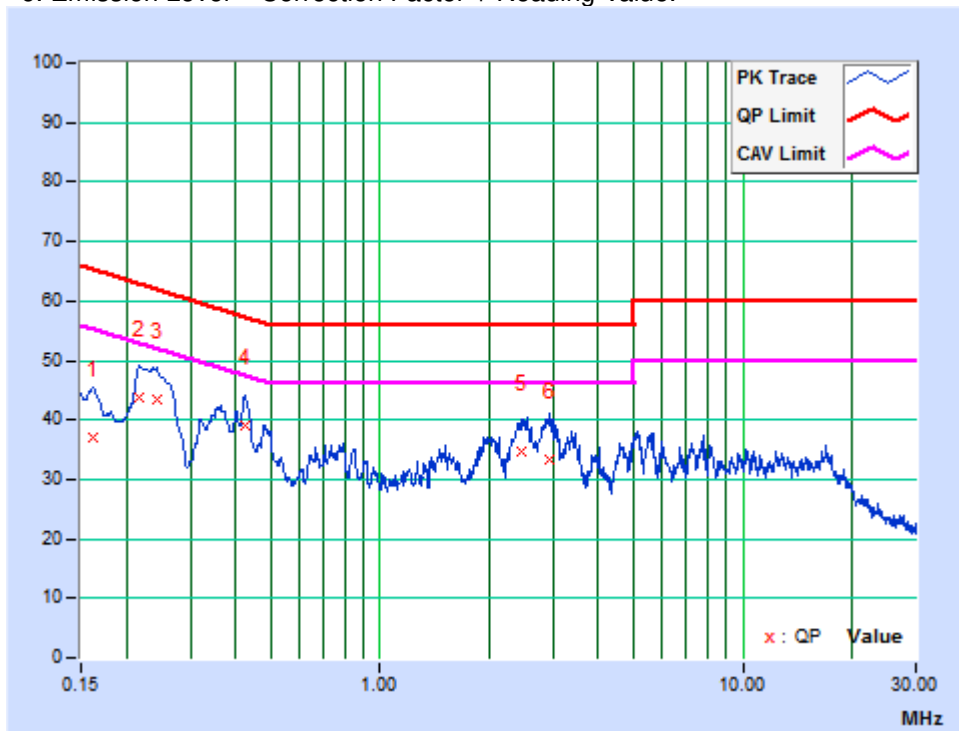




<b>TEST MODE</b>	WIFI Link	<b>6DB BANDWIDTH</b>	9 kHz
<b>TEST VOLTAGE</b>	DC 3.3V	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 62% RH	<b>TESTED BY</b>	Ming Bai

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23977	9.73	37.43	24.76	47.16	34.49	62.10	52.10	-14.94	-17.61
2	0.25575	9.74	37.07	21.53	46.81	31.27	61.57	51.57	-14.76	-20.30
3	0.36581	9.78	34.16	26.11	43.94	35.89	58.60	48.60	-14.65	-12.70
<b>4</b>	<b>0.42450</b>	<b>9.80</b>	<b>38.18</b>	<b>25.19</b>	<b>47.98</b>	<b>34.99</b>	<b>57.36</b>	<b>47.36</b>	<b>-9.38</b>	<b>-12.37</b>
5	0.48750	9.81	32.54	19.37	42.35	29.18	56.21	46.21	-13.86	-17.03
6	0.84075	9.78	25.47	19.41	35.25	29.19	56.00	46.00	-20.75	-16.81

- REMARK:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

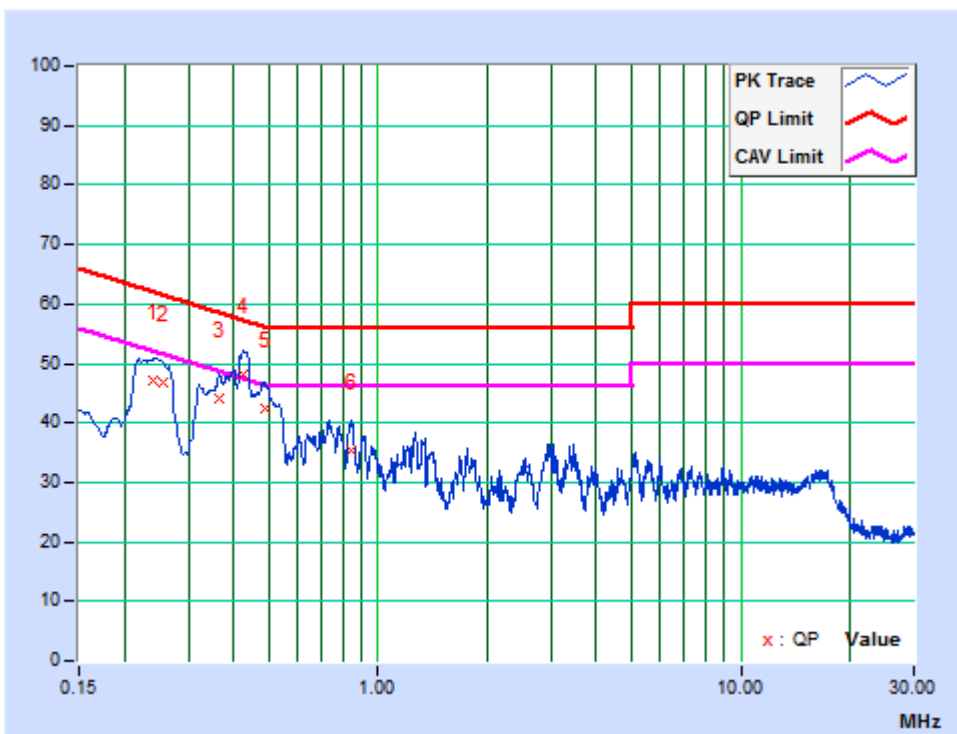



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**TEST STANDARD: EN 55032**

**FOR FREQUENCY BELOW 1000 MHz**

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	Quasi-Peak (dBuV/m)	Quasi-Peak (dBuV/m)
30 – 230	40	30
230 – 1000	47	37

FREQUENCY (MHz)	Class A (at 3m)	Class B (at 3m)
	Quasi-Peak (dBuV/m)	Quasi-Peak (dBuV/m)
30 – 230	50	40
230 – 1000	57	47

#### For FM receivers

Distance (m)	Source	Frequency Range (MHz)	Limits dB (uV/m)	
			Quasi-peak	
10	Local oscillator	≤1000	Fundamental	50
		30 to 300	Harmonics	42
		300 to 1000	Harmonics	46
	Other	30 to 230		30
		230 to 1000		37
3	Local oscillator	≤1000	Fundamental	60
		30 to 300	Harmonics	52
		300 to 1000	Harmonics	56
	Other	30 to 230		40
		230 to 1000		47



**FREQUENCY RANGE OF RADIATED MEASUREMENT**  
(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	Up to 5 times of the highest frequency or 6 GHz, whichever is less

**FOR FREQUENCY ABOVE 1000 MHz**

FREQUENCY (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
1 to 3	76	56	70	50
3 to 6	80	60	74	54

- NOTES:** (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



### 3.2.2 TEST INSTRUMENTS

#### FREQUENCY RANGE BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU26	100005	Apr 17, 22
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Mar. 07,22
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-555	Dec. 11, 21
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Jan. 09, 22
Preamplifier	EMCI	EMC1135	980378	Mar. 13,22
Preamplifier	EMCI	EMC1135	980423	Mar. 13,22
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8.8m	NSEMC006	May 23,22
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.  
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### FREQUENCY RANGE ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00085519	Nov. 06, 21
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170147	May 04, 22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101003	Feb. 24,22
Broadband Preamplifier (1~18GHz)	Rohde&Schwarz	SCU18	102265	Jun, 21,22
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 10,22
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.  
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.2.3 TEST PROCEDURE

#### <Frequency Range below 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

#### NOTES:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.



### <Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter-to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

#### NOTES:

1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
3. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
6. Margin value = Emission level – Limit value.


### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation.




### 3.2.5 TEST SETUP

<Frequency Range below 1GHz>

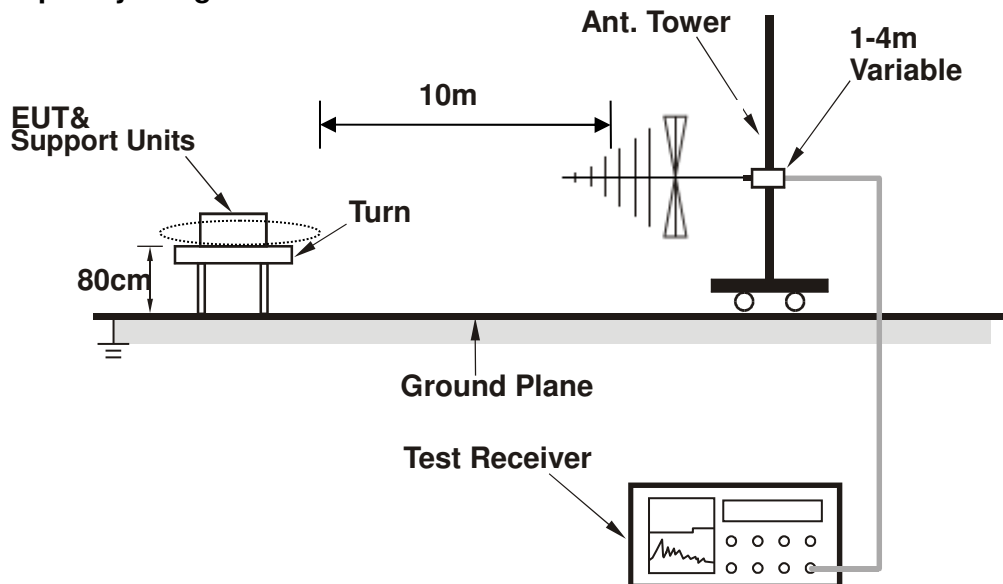

<Frequency Range above 1GHz>

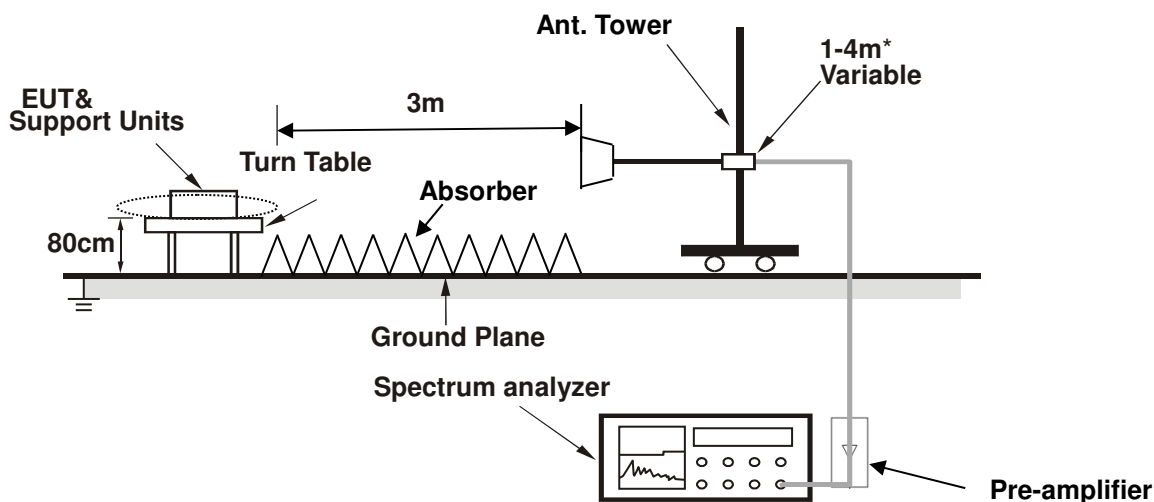

\*: depends on the EUT height and the antenna 3dB beam width both, refer to section 7.3 of CISPR 16-2-3

### 3.2.6 EUT OPERATING CONDITIONS

See items 3.1.6.




### 3.2.7 TEST RESULTS (BELOW 1GHz)

TEST MODE	WIFI Link	FREQUENCY RANGE	30-1000 MHz
TEST VOLTAGE	DC 3.3V	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 58% RH	TESTED BY:	Alex

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.000	-25.54	46.54	21.00	30.00	-9.00	400	89
2	45.035	-23.00	48.49	25.49	30.00	-4.51	400	43
3	117.785	-24.26	37.65	13.39	30.00	-16.61	400	231
4	248.371	-21.49	39.50	18.01	37.00	-18.99	400	40
5	364.286	-18.12	31.50	13.38	37.00	-23.62	200	171
6	475.836	-14.84	38.82	23.98	37.00	-13.02	200	52

- REMARK:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

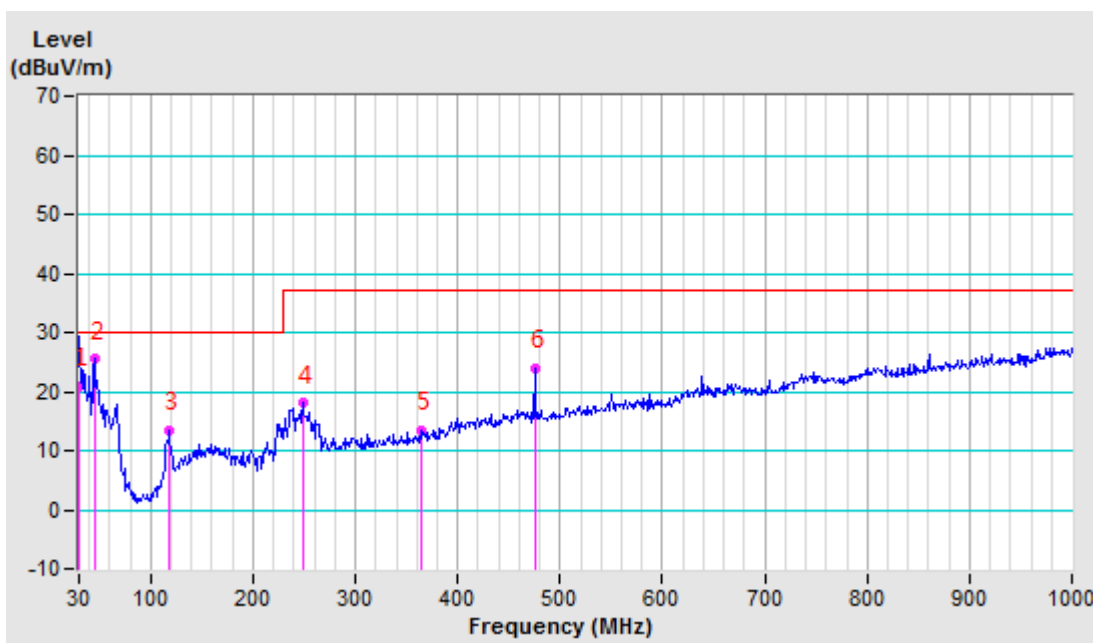




<b>TEST MODE</b>	WIFI Link	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>TEST VOLTAGE</b>	DC 3.3V	<b>DETECTOR FUNCTION &amp; BANDWIDTH</b>	Quasi-Peak, 120kHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 58% RH		<b>TESTED BY:</b> Alex

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	33.977	-22.77	35.40	12.63	30.00	-17.37	100	43
2	170.221	-20.80	33.16	12.36	30.00	-17.64	100	280
3	237.881	-21.78	37.53	15.75	37.00	-21.25	100	132
4	283.813	-19.68	35.40	15.72	37.00	-21.28	100	70
5	332.946	-18.31	35.92	17.61	37.00	-19.39	100	128
6	392.701	-16.95	36.32	19.37	37.00	-17.63	100	153

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 30MHz to 1000MHz.
  4. Only emissions significantly above equipment noise floor are reported.

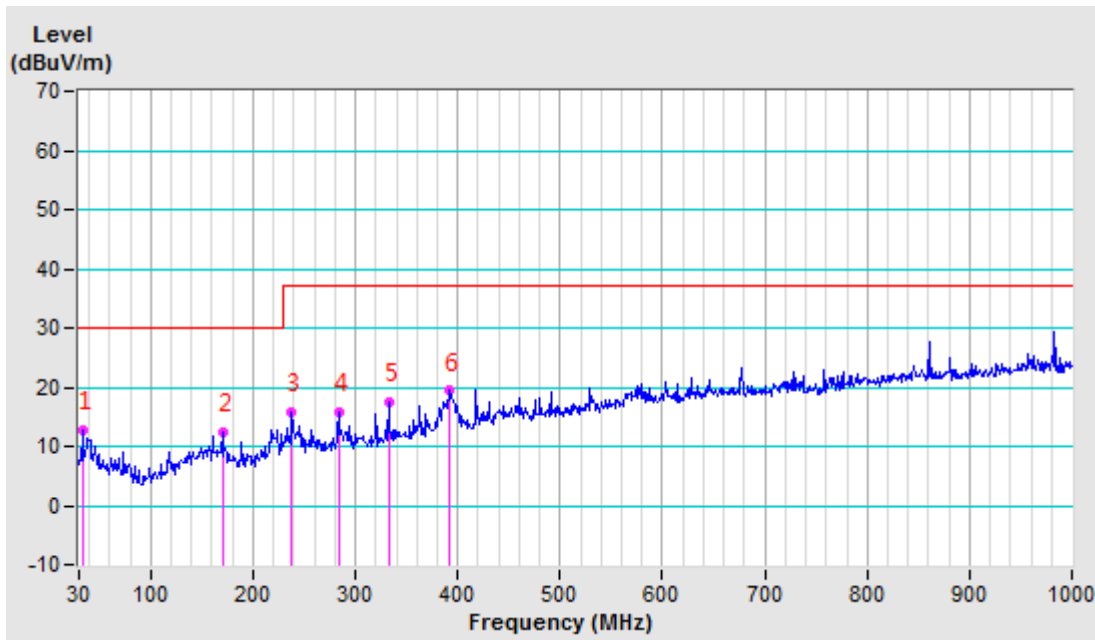



### 3.2.8 TEST RESULTS (ABOVE 1GHz)

<b>TEST MODE</b>	WIFI Link		
<b>TEST VOLTAGE</b>	DC 3.3V	<b>FREQUENCY RANGE</b>	1-6 GHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 58% RH	<b>TESTED BY:</b> Alex	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	1174.00PK	-12.67	67.77	55.10	70.00	-14.90	100	84
2	1174.00AV	-12.67	37.47	24.80	50.00	-25.20	100	84
3	3387.00PK	-7.26	61.86	54.60	74.00	-19.40	100	22
4	3387.00AV	-7.26	35.96	28.70	54.00	-25.30	100	22
5	5814.00PK	-2.45	58.55	56.10	74.00	-17.90	100	318
6	5814.00AV	-2.45	27.35	24.90	54.00	-29.10	100	318

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
<b>1</b>	<b>1847.00PK</b>	<b>-11.03</b>	<b>66.73</b>	<b>55.70</b>	<b>70.00</b>	<b>-14.30</b>	<b>100</b>	<b>32</b>
2	1847.00AV	-11.03	36.93	25.90	50.00	-24.10	100	32
3	3861.00PK	-6.25	60.55	54.30	74.00	-19.70	100	57
4	3861.00AV	-6.25	31.15	24.90	54.00	-29.10	100	57
5	5394.00PK	-2.98	56.68	53.70	74.00	-20.30	100	69
6	5394.00AV	-2.98	29.08	26.10	54.00	-27.90	100	69

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
  2. Negative sign (-) in the margin column signify levels below the limit.
  3. Frequency range scanned: 1GHz to 6GHz.
  4. Only emissions significantly above equipment noise floor are reported.



## 4 IMMUNITY TEST

### 4.1 GENERAL DESCRIPTION

<b>Product Standard</b>	<b>EN 301 489-1 V2.2.3 (2019-11)</b> <b>EN 301 489-17 V3.2.4 (2020-09)</b>	
<b>Basic Standard, Specification, and Performance Criterion required</b>	EN 61000-4-2	Electrostatic Discharge – ESD: 8 kV air discharge, 4 kV Contact discharge, Performance Criterion B
	EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80~6000 MHz, 3 V/m, 80% AM (1 kHz), Performance Criterion A

#### 4.1.1 GENERAL PERFORMANCE CRITERIA DESCRIPTION

For EN 301 489-17

The performance criteria		
Performance criteria A for immunity tests with phenomena of a continuous nature	continuous phenomena	1. Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test. 2. Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test
Performance criteria B for immunity tests with phenomena of a transient nature	Transient phenomena	1. Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test 2. Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test
Performance criteria C for immunity tests with power interruptions exceeding a certain time	Transient phenomena	Voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply



The phenomena allowed during and after test in each criterion are clearly stated in the following table.

Performance criteria		
Criteria	During test	After test
A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of stored data.
B	May show loss of function	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.
<p><b>NOTES:</b> Operate as intended during the test allows a level of degradation in accordance with a and b.</p> <p>(a) For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.</p> <p>(b) For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.</p>		



## 4.2 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

### 4.2.1 TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge: 8 kV (Direct) Contact Discharge: 4 kV (Direct and Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	20 times on each test points
<b>Discharge Mode:</b>	Single Discharge
<b>Discharge Period:</b>	1 second

### 4.2.2 TEST INSTRUMENT

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
ESD Generator	TESEQ	NSG 437	279	Mar. 03,22
Test Software	TESEQ	V03.03	N/A	N/A
ESD Generator	EM TEST	Dito	V1211112265	Nov. 29,21
Test Software	EM TEST	V 2.31	N/A	N/A

- NOTES:**
1. The test was performed in ESD Room.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 4.2.3 TEST PROCEDURE

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The discharge return cable of the generator shall be kept at a distance of at least 0.2 m from the EUT whilst the discharge is being applied and should not be held by the operator.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned horizontally at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.


### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.





## 4.2.5 TEST SETUP

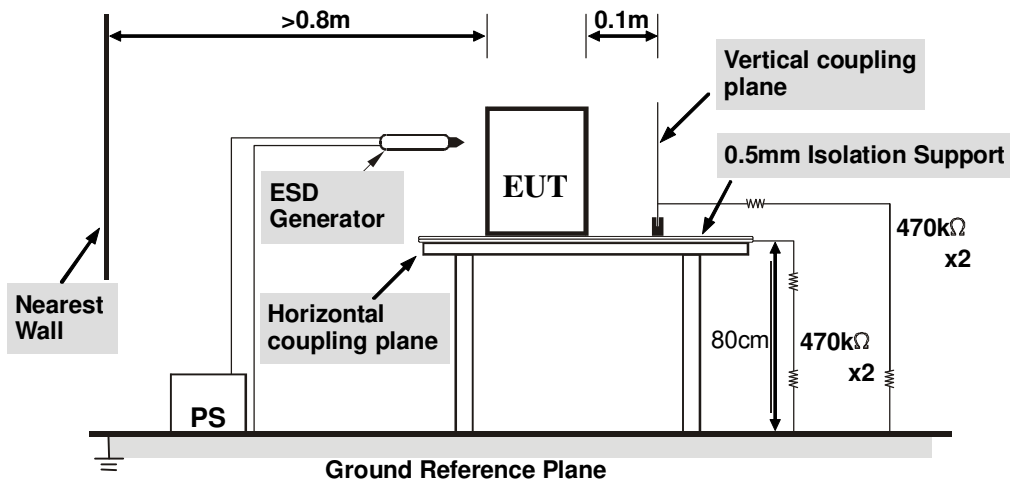

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2 and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 0.8-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.



### 4.2.6 TEST RESULTS

<b>TEST VOLTAGE</b>	DC 3.3V	<b>ENVIRONMENTAL CONDITIONS</b>	23.5deg. C, 51.7% RH, 101.2KPa
<b>TESTED BY</b>	Ming Bai		



Direct Discharge Application				
Test Level (kV)	Polarity	Test Point	Test Result of Contact Discharge	Test Result of Air Discharge
4	+ / -	All metal parts	A	N/A
8	+ / -	All non-metal parts	N/A	A


Indirect Discharge Application				
Discharge Level (kV)	Polarity	Test Point	Test Result of HCP	Test Result of VCP
4	+ / -	All Sides	A	N/A
4	+ / -	All Sides	N/A	A

**NOTE:** A: There was no change compared with initial operation during the test.



### ESD TEST POINT

(  Direct Contact Discharge;  -Air Discharge)

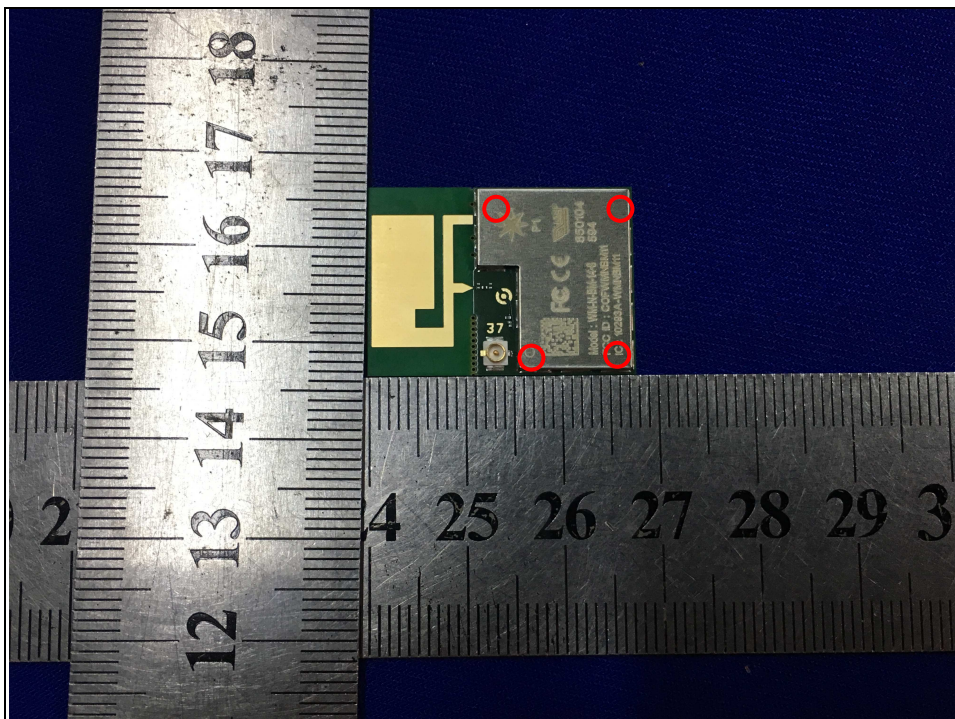



### 4.3 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

#### 4.3.1 TEST SPECIFICATION

<b>Basic Standard:</b>	EN 61000-4-3
<b>Frequency Range:</b>	80 MHz ~ 6000MHz
<b>Field Strength:</b>	3 V/m
<b>Modulation:</b>	1 kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1% of preceding frequency value
<b>Polarity of Antenna:</b>	Horizontal and Vertical
<b>Antenna Height:</b>	1.5 m
<b>Dwell Time:</b>	3 seconds

#### 4.3.2 TEST INSTRUMENT

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Signal Generator	Agilent	N5181A	MY50142530	Sep. 04,21
Antenna Log-Periodic	AR	ATR80M6G	0337307	N/A
Antenna Log-Periodic	AR	ATS700M11G	0336821	N/A
Switch Controller	AR	SC1000	0337343	N/A
RF Power Meter	Boonton	4242	13984	Sep. 04,21
Power Sensor	Boonton	51011EMC	35716	Sep. 04,21
Power Sensor	Boonton	51011EMC	35715	Sep. 04,21
E-Field probe	Narda	NBM-520	2403/01B	Nov. 11,21
Power Amplifier	TESEQ	CBA 1G-150	T44029	N/A
Power Amplifier	TESEQ	CBA 3G-100	T44030	N/A
Power Amplifier	TESEQ	CBA 6G-050	1041204	N/A
Dual Directional Coupler	TESEQ	C5982	95208	Sep. 04,21
Dual Directional Coupler	TESEQ	C6187	95175	Sep. 04,21
Dual Directional Coupler	TESEQ	CPH-274F	M251304-01	Sep. 04,21
Audio analyzer	Rohde&Schwarz	UPV	101397	Sep. 04,21
Conditioning Amplifier	B&K	2690-W-013	3241205	Mar. 17,22
EAR SIMULATOR	B&K	4192	2764719	May 09,22
Test Software	Tonscend	TS+	2.0.1.8	N/A

- NOTES:**
1. The test was performed in RS chamber.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 4.3.3 TEST PROCEDURE


The test procedure was in accordance with EN 61000-4-3.

- a. The testing was performed in a fully-anechoic chamber.
- b. The frequency range is swept from 80 MHz to 6000 MHz with the signal 80% amplitude modulated with a 1 kHz sine wave.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0.5s.
- d. The field strength level was 3 V/m.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.3.5 TEST SETUP

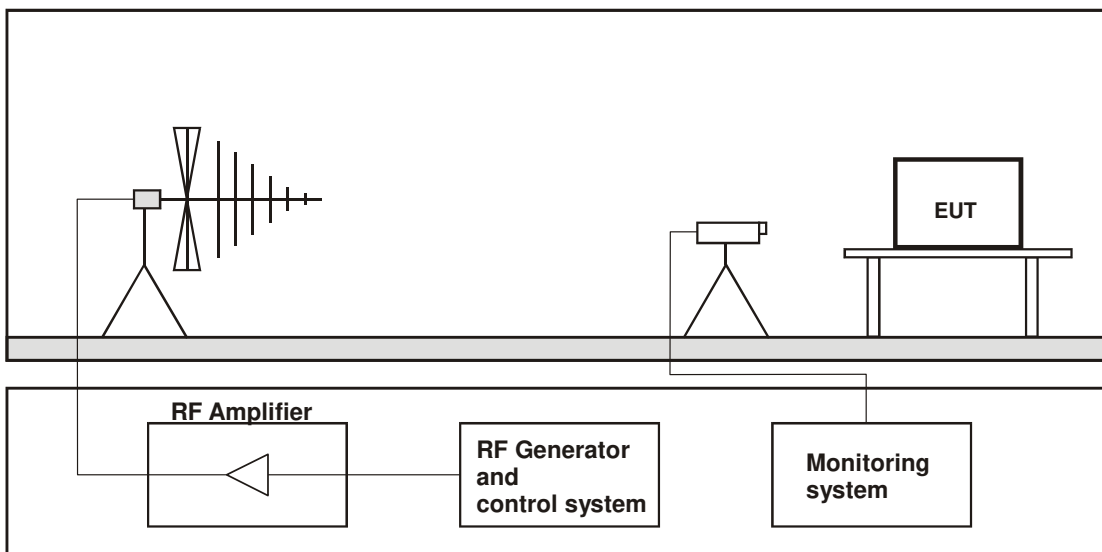

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



### 4.3.6 TEST RESULTS

<b>TEST VOLTAGE</b>	WIFI Link	<b>ENVIRONMENTAL CONDITIONS</b>	23.4 deg. C,56.7% RH,
<b>TESTED BY</b>	Xue Wang		

Field Strength (V/m)	Test Frequency Note <sup>#1</sup> (MHz)	Polarization of antenna (Horizontal / Vertical)	Test Distance (m)	Test Result	Remark
3	80-6000	H / V	3	A	N/A


Note<sup>#1</sup>: Tested Israel SII Frequencies 89,100,107,144,163,196,244,315,434,460,600,825,845,880 MHz

**NOTE:** A: There was no change compared with initial operation during the test.




## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

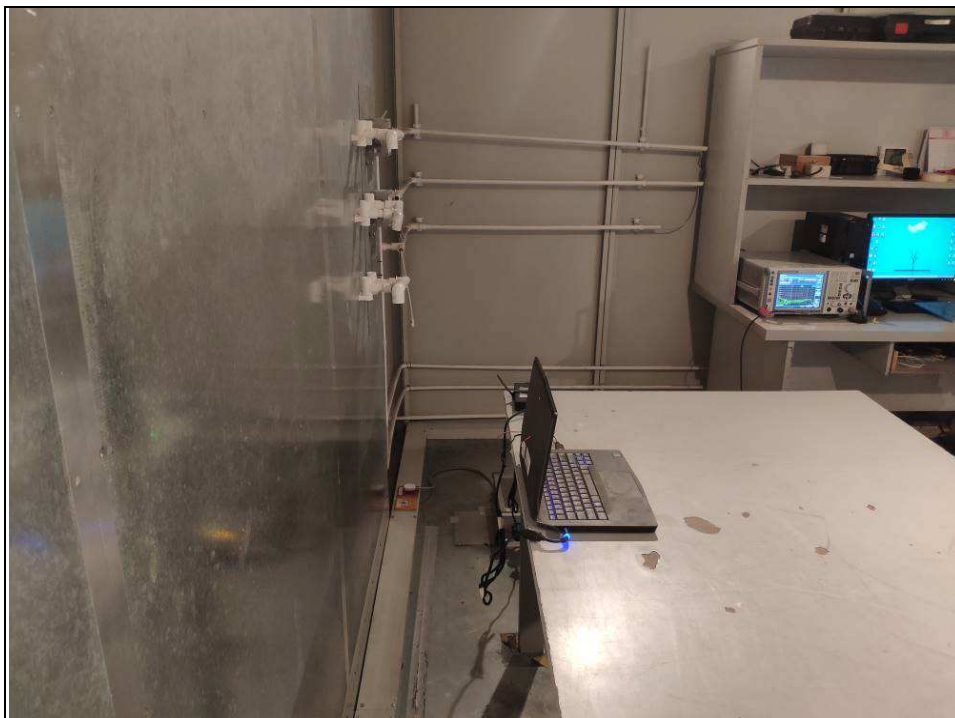




RADIATED EMISSION TEST < 30MHz~1GHz>

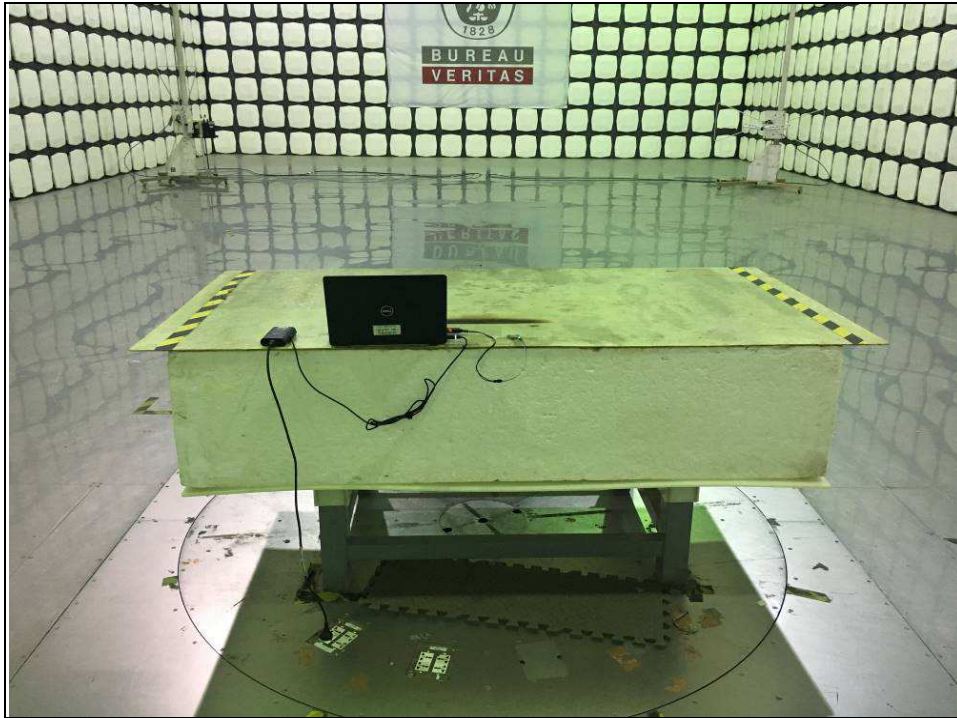


RADIATED EMISSION TEST < 30MHz~1GHz>

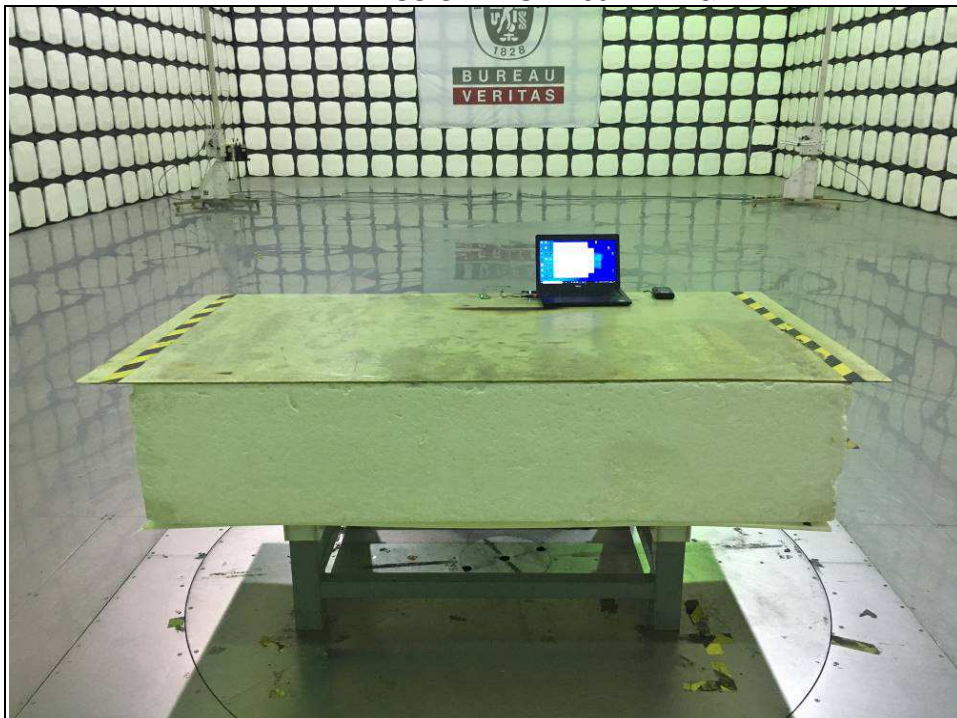






RADIATED EMISSION TEST < above 1GHz>

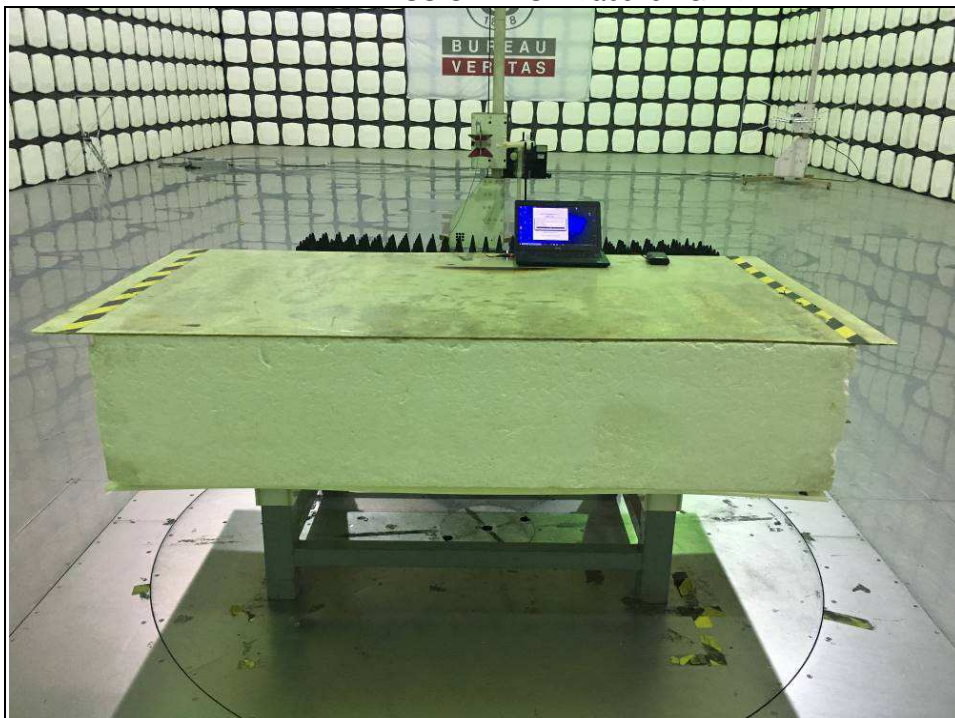

RADIATED EMISSION TEST < above 1GHz>

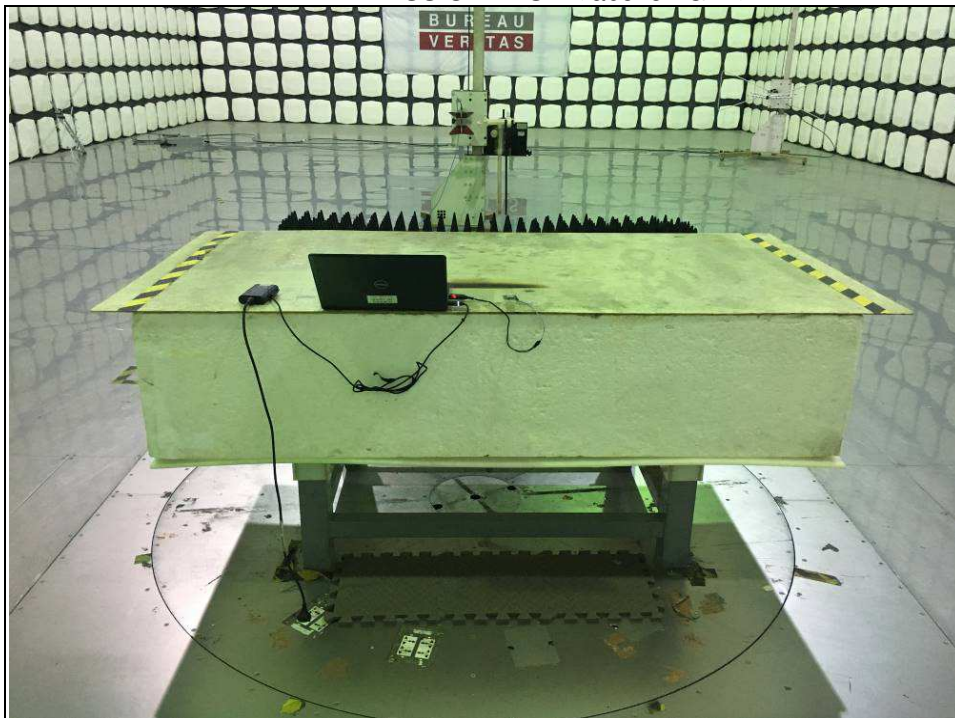




### ESD TEST



### R/S TEST

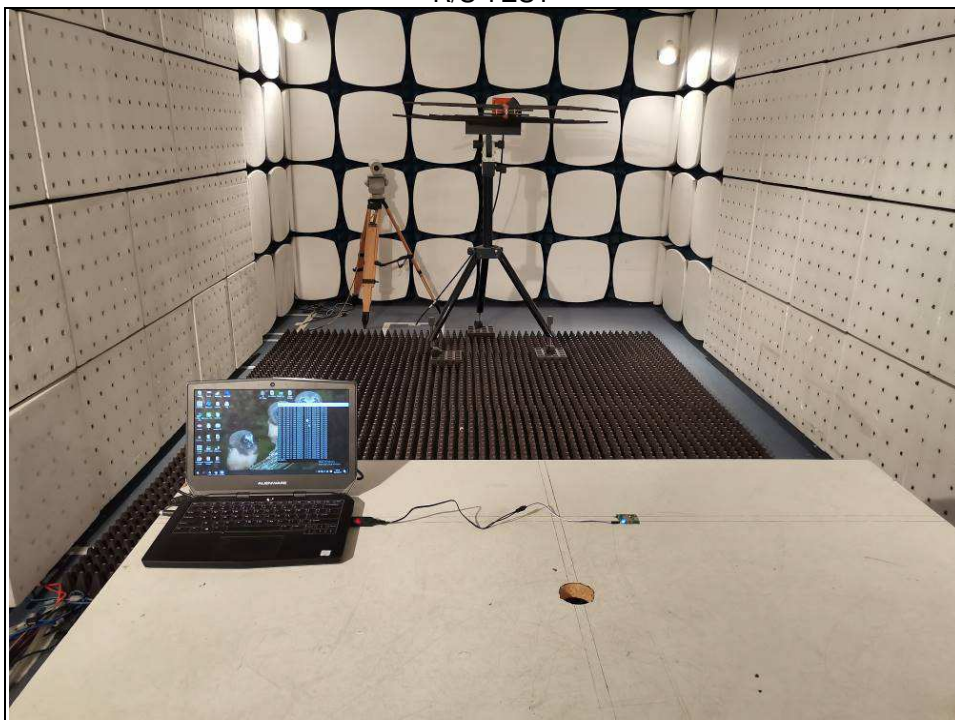



## 6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---