





TEST REPORT

Applicant	Particle Industries, Inc
Address	325 9th St, San Francisco, CA 94103 USA, 415-319-1553

Manufacturer or Supplier	Particle Industries, Inc
Address	325 9th St, San Francisco, CA 94103 USA, 415-319-1553
Product	Tracker SoM LTE CAT1/3G/2G
Brand Name	Particle
Model	T523M
Additional Model & Model Difference	T524M, See items 2.1 note
Date of tests	May 18. 2020 ~ Jul. 17, 2020

The submitted sample of the above equipment has been tested according to the requirements of the following standard:

☑ EN 303 413 V1.2.1 (2021-04)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen	Approved by Glyn He
Project Engineer / EMC Department	Assistant Manager / EMC Department

Date: Sep. 02, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/ and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China. Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



TABLE OF CONTENTS

KI	ELEASE (CONTROL RECORD	3
1	SUMMA	ARY OF TEST RESULTS	4
	1.1 ME	ASUREMENT UNCERTAINTY	4
2	GENEF	RAL INFORMATION	5
	2.2 DE 2.2.1 2.3 DE 2.4 TE 2.5 TE	NERAL DESCRIPTION OF EUT. SCRIPTION OF TEST MODES TEST MODE APPLICABILITY AND TESTED DETAIL. SCRIPTION OF SUPPORT UNITS ST INSTRUMENTS ST PROCEDURE AND RESULTS NERAL DESCRIPTION OF APPLIED STANDARDS.	6 9 9
3	TEST F	PROCEDURE AND RESULTS	11
	3.1.1 3.1.2 3.1.3 3.1.4 3.1.5	CEIVER BLOCKING CONFORMANCE SPECIFICATIONS TEST PROCEDURES DEVIATION FROM TEST STANDARD. TEST SETUP TEST RESULTS CEIVER SPURIOUS EMISSIONS LIMIT OF RECEIVER SPURIOUS RADIATION TEST PROCEDURE DEVIATION FROM TEST STANDARD. TEST SETUP TEST RESULTS	11 11 11 12 . 14 . 14 . 14
4	РНОТО	OGRAPHS OF THE TEST CONFIGURATION	. 17
5	APPEN THE LA	IDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY	

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RE200518N021-3	Original release	Aug. 14, 2020
RE2208WDG0098-3	Based on the original report RE200518N021-3 changed the address about the applicant and manufacturer, updated standard version, but it doesn't need to be retested.	Sep. 02, 2022

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

EN 303 413 V1.2.1			
Clause Test Parameter		Results	
4.2.1	Receiver blocking	Pass	
4.2.2	Spurious domain	Pass	

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameter	Uncertainty
Uncertainty in conducted measurements	± 2.855 dB
Uncertainty in radiated measurements	± 2.855 dB
Spurious emissions	± 2.855dB

Note: Referenced documents ETSI EN 300 328 standard.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Tracker SoM LTE CAT1/3G/2G		
BRAND	Particle		
TEST MODEL	T523M		
ADDITIONAL MODELS	T524M		
NOMINAL VOLTAGE	Li+ PIN: DC +3.3V-4.3V or VBUS PIN: DC +4.35V-5.5V or VIN PIN: DC +3.9V-17V		
REGULATORY TYPE	GPS, GALILEO		
MODULATION GPS		CDMA	
TECHNOLOGY	GALILEO CDMA		
MODULATION TYPE	GPS	S BPSK	
MODULATION TIPE	GALILEO	CBOC	
OPERATING FREQUENCY	GPS	1575.42 MHz±1.023 MHz	
OPERATING PREQUENCY	GALILEO	O 1575.42 MHz±1.023 MHz	
ANTENNA TYPE	External Active Antenna		
VERSION OF HARDWARE	V1.0		
VERSION OF SOFTWARE	V1.5.4		

Notes:

- 1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
- 2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
- 3. Additional model T524M is identical with the test model T523M except the model number for marketing purpose.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



2.2 DESCRIPTION OF TEST MODES

GNSS	RNSS FREQUENCY
GPS	1575.42 MHz
GALILEO	1575.42 MHz

2.2.1 TEST MODE APPLICABILITY AND TESTED DETAIL

EUT Configure Mode	Applicable to			Description
Lot Configure Mode	RB	SE< 1G	SE≥ 1G	Description
GPS/ GALILEO	√	√	√	-

Where ASS: Adjacent signal selectivity

SE<1G: Unwanted Emissions in the Spurious Domain below 1 GHz

SE≥1G: Unwanted Emissions in the Spurious Domain above 1 GHz

NOTE: 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane.**

RECEIVER BLOCKING:

Following Supported GNSS(s) was (were) selected for the final test as listed below.

- end in ig dapper tod di tod (e) mas (in cro) de tod ter tino in iai tod de netod de termi				
GNSS	GNSS Signals			
BDS	☐ B1I	☐ B1C		
Galileo	⊠ E1	□ E5a	☐ E5b	□ E6
GLONASS	☐ G1	☐ G2		
GPS		☐ L1C	☐ L2C	☐ L5
SBAS	☐ L1	☐ L5		

Tel.: +86 769 8998 2098



☐ GNSS, GNSS signals and RNSS frequency bands

GNSS	GNSS Signal Designations	RNSS Frequency Band (MHz)
BDS	B1I	1 559 to 1 610
	B1C	1 559 to 1 610
Galileo	E1	1 559 to 1 610
	E5a	1 164 to 1 215
	E5b	1 164 to 1 215
	E6	1 215 to 1 300
GLONASS	G1	1 559 to 1 610
	G2	1 215 to 1 300
GPS	L1 C/A	1 559 to 1 610
	L1C	1 559 to 1 610
	L2C	1 215 to 1 300
	L5	1 164 to 1 215
SBAS	L1	1 559 to 1 610
	L5	1 164 to 1 215

Frequency bands, blocking signal test point centre frequencies and power levels for the 1 559 MHz to 1 610 MHz RNSS band

Frequency band(MHz)	Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	Comments	
1518 - 1 525	1 524	-65	MSS (space-to-Earth) band	
1 525 - 1 549	1 548	-95	MSS (space-to-Earth) band	
1 549 - 1 559	1 554	-105	MSS (space-to-Earth) band	
1 559 - 1 610		GUE RNSS band under test		
1 610 - 1 626	1 615	-105	MSS (Earth-to-space) band	
1 626 - 1 640	1 627	-85	MSS (Earth-to-space) band	

Frequency bands, blocking signal test point centre frequencies and power levels for the for the 1164 MHz to 1300 MHz RNSS band

Frequency band (MHz)	Test point centre frequency (MHz)	Comments			
960 - 1 164	1 154	-75	AM(R)S, ARNS band		
1 164 - 1 215	GUE RNSS band under test				
1 215 - 1 260	GUE RNSS band under test				
1 260 - 1 300	GUE RNSS band under test				
1 300 - 1 350	1 310	-85	Radiolocation, ARNS, RNSS (Earth-to-space) band		

(Maximum) signal levels for each GNSS supported

(iviaxiiiiaiii) oigiic		
GNSS	Parameters	Value
GPS	(Maximum) signal level	-128,5 dBm
Galileo	(Maximum) signal level	-127 dBm

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN TEST (BELOW 1 GHZ):

Following GNSS(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	GNSS	GNSS SIGNAL DESIGNATIONS	RNSS FREQUENCY (MHZ)
-	GPS	L1 C/A	1575.42 MHz
-	GALILEO	E1	1575.42 MHz

UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN TEST (ABOVE 1 GHZ):

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	GNSS	GNSS SIGNAL DESIGNATIONS	RNSS FREQUENCY (MHZ)
-	GPS	L1 C/A	1575.42 MHz
-	GALILEO	E1	1575.42 MHz

TEST CONDITION:

Applicable to	Environmental Conditions	Input Power	Tested by
ASS	22 ℃, 59% RH	DC3.8V from Som test board V03	Daniel
SE<1G	22 ℃, 59% RH	DC3.8V from Som test board V03	Hu
SE≥1G	22 ℃, 59% RH	DC3.8V from Som test board V03	Hu

Remarks: The Som test board V03 is support units, it power by 3.8V battery.

Email: customerservice.dg@bureauveritas.com

Tel.: +86 769 8998 2098

Fax: +86 769 8593 1080

Page 8 of 19



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any accessories or support units.

2.4 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Signal Analyzer	Rohde&Schwarz	FSL3	101507	Apr. 04, 21
Vector Signal Generator	Rohde&Schwarz	SMBV100A	1407.6004k02-2 59143-XW	Apr. 04, 21
Signal Generator	Rohde&Schwarz	SMB100A	102383	Apr. 04, 21
Signal Generator	Agilent	N5181A	MY50142530	Oct. 12,20
Dual Directional Coupler	TESEQ	C5982	95208	Nov. 08,20
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 10,21
Broadcast Test System	Rohde&Schwarz	SFU	101543	Apr. 04, 21
Resistive Power Splitter	N/A	1870A	7776	Apr. 04, 21


NOTES:

- 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
- 2. The test was performed in Dongguan RF Room.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

2.5 TEST PROCEDURE AND RESULTS

CONFIGURATION OF SYSTEM UNDER TEST

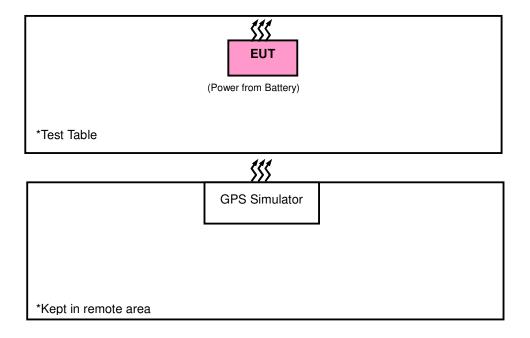

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

ETSI EN 303 413 V1.2.1 (2021-04)

All test items have been performed and recorded as per the above standard

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3 TEST PROCEDURE AND RESULTS

3.1 RECEIVER BLOCKING

3.1.1 CONFORMANCE SPECIFICATIONS

Condition	Maximum Degradation in C/N₀	
Under all test conditions	Δ C/N ₀ ≤ 1 dB	

3.1.2 TEST PROCEDURES


Refer to clause 5.4 of ETSI EN 303 413 V1.2.1 (2021-04)

Measurement Method						
□ Conducted measurement	☐ Radiated measurement					

3.1.3 DEVIATION FROM TEST STANDARD

No deviation.

3.1.4 TEST SETUP

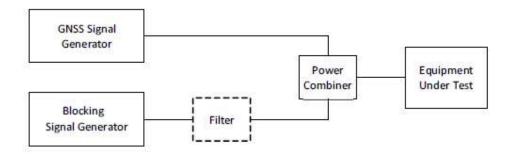

The measurements for Receiver blocking was performed at both normal environmental conditions. Controlling software has been activated to set the EUT on specific GNSS and power level.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3.1.5 TEST RESULTS

Test results for the 1 559 MHz to 1 610 MHz RNSS band

Frequency	Test point centre frequency (MHz)	Blocking signal power		Meas	ured C/N₀ (dB-H	z)
band (MHz)	From table 4-2	From table 4-2	No blocking signal	With blocking signal	Decrease of C/N ₀	Decrease ≤ 1 dB ?
						BDS ☐ Pass ☐ Fail ☐ N/A
			44.5	44.2	0.3	Galileo ☑ Pass ☐ Fail ☐ N/A
1 518 - 1 525	1524	-65				GLONASS Pass Fail N/A
			43.9	43.6	0.3	GPS ☑ Pass ☐ Fail ☐ N/A
						SBAS Pass Fail N/A
						BDS Pass Fail N/A
		-95	44.5	44.1	0.4	Galileo Pass Fail N/A
1 525 - 1 549	1548	-95				GLONASS Pass Fail N/A
			43.9	43.7	0.2	GPS ☐ Pass ☐ Fail ☐ N/A
						SBAS Pass Fail N/A BDS
						Pass Fail N/A Galileo
			44.5	44.1	0.4	☐ Pass ☐ Fail ☐ N/A GLONASS
1 549 - 1 559	1554	-105				Pass Fail N/A GPS
			43.9	43.5	0.4	☐ Pass ☐ Fail ☐ N/A SBAS
						Pass Fail N/A BDS
			44.50	40.0		Pass Fail N/A Galileo
1 010 1 000			44.58	43.9	0.6	☐ Pass ☐ Fail ☐ N/A GLONASS
1 610 - 1 626	1615	-105	40.0	40.0	0.0	Pass Fail N/A GPS
			43.9	43.6	0.3	☐ Pass ☐ Fail ☐ N/A SBAS
						Pass Fail N/A BDS
			44.5	44.2	0.3	Pass Fail N/A Galileo
1 626 - 1 640	40		44.5	44.2	0.3	Pass Fail N/A GLONASS
1 020 - 1 040	1627	1627 -85	43.9	43.7	0.2	Pass Fail N/A GPS
			70.0	70.7	0.2	☐ Pass ☐ Fail ☐ N/A SBAS
						☐ Pass ☐ Fail ☐ N/A

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

Email: customerservice.dg@bureauveritas.com



Test results for the 1 164 MHz to 1 300 MHz RNSS band

Frequency	Test point centre frequency (MHz)	Blocking signal power	Measured C/N ₀ (dB-Hz)		z)		
band (MHz)	From table 4-3	No blockin		With blocking signal	Decrease of C/N ₀	Decrease ≤ 1 dB ?	
						BDS ☐ Pass ☐ Fail ☐ N/A	
						Galileo ☐ Pass ☐ Fail N/A	
960 - 1 164	1154	-75				GLONASS Pass Fail N/A	
						GPS □ Pass □ Fail ☑ N/A	
						SBAS ☐ Pass ☐ Fail ☐ N/A	
						BDS □ Pass □ Fail ☑ N/A	
		1310 -85				Galileo □ Pass □ Fail ⊠ N/A	
1 300 - 1 350 1310	1310					GLONASS ☐ Pass ☐ Fail N/A	
						GPS □ Pass □ Fail ☑ N/A	
							SBAS ☐ Pass ☐ Fail ☐ N/A

Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

Tel.: +86 769 8998 2098

Page 13 of 19



3.2 RECEIVER SPURIOUS EMISSIONS

3.2.1 LIMIT OF RECEIVER SPURIOUS RADIATION

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz ~ 1 GHz	-57dBm	100 kHz
1 GHz ~ 8.3 GHz	-47dBm	1 MHz

Note: These limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

3.2.2 TEST PROCEDURE

Refer to clause 5.5 of ETSI EN 303 413 V1.2.1 (2021-04)

Measurement Method				
☐ Conducted measurement	□ Radiated measurement			
For Conducted measurement:				
The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).				
Conducted measurement (For equipment with multiple transmit chains):				
Option 1: The results for each of the transr added and compared with the limits.	nit chains for the corresponding 1MHz segments shall be			
Option 2: The results for each of the transmethese limits have been reduced by 10 x log	nit chains shall be individually compared with the limits after (N) (number of active transmit chains)			

3.2.3 DEVIATION FROM TEST STANDARD

No deviation.

3.2.4 TEST SETUP

- 1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
- 2. Testing was performed when the equipment was in a receive-only mode.
- 3. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



3.2.5 TEST RESULTS

RX Below 1GHz Worst Data:

Frequency Range	30 MHz ~ 1 GHz	Operating GNSS	GPS 1575.42MHz
-----------------	----------------	----------------	----------------

	SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)	
30.00	V	-88.30	-57.00	-31.30	
43.99	Н	-78.43	-57.00	-21.43	
99.95	V	-80.51	-57.00	-23.51	
146.59	Н	-88.05	-57.00	-31.05	
152.80	V	-83.39	-57.00	-26.39	
233.64	V	-81.28	-57.00	-24.28	
252.29	Н	-81.19	-57.00	-24.19	
337.79	V	-80.47	-57.00	-23.47	
393.75	Н	-81.61	-57.00	-24.61	
443.49	V	-77.50	-57.00	-20.50	
479.25	Н	-78.77	-57.00	-21.77	
561.63	Н	-77.82	-57.00	-20.82	

Frequency Range	30 MHz ~ 1 GHz	Operating GNSS	GALILEO 1575.42MHz
-----------------	----------------	----------------	--------------------

	SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)	
45.54	Н	-77.83	-57.00	-20.83	
65.75	Н	-87.63	-57.00	-30.63	
99.95	Н	-89.01	-57.00	-32.01	
99.95	V	-80.19	-57.00	-23.19	
143.48	Н	-87.41	-57.00	-30.41	
143.48	V	-83.43	-57.00	-26.43	
233.64	V	-81.10	-57.00	-24.10	
260.06	V	-83.14	-57.00	-26.14	
323.80	V	-80.46	-57.00	-23.46	
395.30	Н	-80.46	-57.00	-23.46	
412.40	V	-79.50	-57.00	-22.50	
487.02	Н	-78.46	-57.00	-21.46	

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

Email: customerservice.dg@bureauveritas.com



RX Above 1GHz Data

Frequency Range	1 GHz ~ 8.3 GHz	Operating GNSS	GPS 1575.42MHz
-----------------	-----------------	----------------	----------------

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
3150.84	Н	-52.21	-47.00	-5.21
3150.84	V	-52.53	-47.00	-5.53
4726.26	Н	-51.13	-47.00	-4.13
4726.26	V	-51.41	-47.00	-4.41


SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
3210.75	Н	-51.97	-47.00	-4.97
3210.75	V	-52.87	-47.00	-5.87
4816.12	Н	-51.02	-47.00	-4.02
4816.12	V	-51.61	-47.00	-4.61

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

RECEIVER BLOCKING

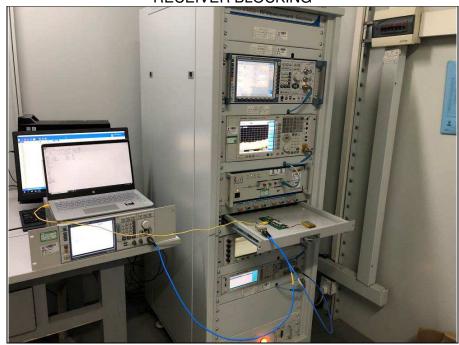

RADIATED EMISSION (BELOW 1GHz)



Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China. Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080





Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080



5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

--- END ---

Tel.: +86 769 8998 2098 Fax: +86 769 8593 1080

Email: customerservice.dg@bureauveritas.com