



Test Report No.: W7L-P23120016RE01



RADIO TEST REPORT (EN 301 511)



Applicant:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America

Manufacturer or Supplier:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America
Product:	M SoM
Brand Name:	Particle
Model Name:	M524
Date of tests:	Dec. 27, 2023 ~ Feb. 18, 2024

The tests have been carried out according to the requirements of the following standard:

ETSI EN 301 511 V12.5.1 (2017-03)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Feb. 18, 2024	Date: Feb. 18, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 TEST INSTRUMENTS	5
1.2 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONDUCTED POWER.....	8
2.3 DESCRIPTION OF TEST MODES	9
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
2.5 DESCRIPTION OF SUPPORT UNITS	10
2.6 CONFIGURATION OF SYSTEM UNDER TEST	10
3 TEST TYPES AND RESULTS	11
3.1 RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL	11
3.1.1 LIMIT OF RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL	11
3.1.2 TEST PROCEDURES.....	11
3.1.3 TEST SETUP	11
3.1.4 DEVIATION FROM TEST STANDARD.....	11
3.1.5 TEST RESULTS.....	12
3.2 RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE	14
3.2.1 LIMIT OF RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE	14
3.2.2 TEST PROCEDURES.....	14
3.2.3 TEST SETUP	14
3.2.4 DEVIATION FROM TEST STANDARD.....	14
3.2.5 TEST RESULTS.....	15
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	17
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	18



Test Report No.: W7L-P23120016RE01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23120016RE01	Original release	Feb. 18, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

HARMONIZED STANDARD EN 301 511				TS 151 010-1 clause
TEST CASE	TEST DESCRIPTION	VERDICT		
		GSM 900	DCS 1800	
4.2.16	Radiated spurious emissions - MS allocated channel.	PASS	PASS	12.2.1
	Normal Temperature / Normal Voltage	NA	NA	
	Normal Temperature / Low Voltage	NA	NA	
	Normal Temperature / High Voltage	NA	NA	
4.2.17	Radiated spurious emissions - MS in idle mode.	PASS	PASS	12.2.2
	Normal Temperature / Normal Voltage	NA	NA	
	Normal Temperature / Low Voltage	NA	NA	
	Normal Temperature / High Voltage	NA	NA	
APPLIED STANDARD: EN 301 511				
The detail information of the data please refer to the FTA report : R2302A0156-R1V2				

1.1 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Pre-Amplifier	EMSI	EMC 02325	980224	May. 06,23	May.05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980258	Aug. 11,23	Aug. 10,24
3m Fully-anechoic Chamber	ETS-LINDGREN	10m*10m*5m	Euroshieldpn-CT0001143-1217	Nov. 13,23	Nov. 12,26
RS Antenna_LF	Rohde&Schwarz	R&S® HL046E	HL064E	NA	NA
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 17,24	Feb. 16,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510032	Feb. 14,23	Feb. 13,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510032	Feb. 13,24	Feb. 12,25
Radio Communication Analyzer	ANRITSU	MT8820C	6201465425	Feb. 14,23	Feb. 13,24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465425	Feb. 13,24	Feb. 12,25
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24
Test Software	JS1120	3.1.36	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Sep. 19,22	Sep. 18,24
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 30,23	Nov. 29,24
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.10,23	May.09,24

NOTE:

1. The calibration interval of the above test instruments is 12 and 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Fully-anechoic Chamber.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

PARAMETER	UNCERTAINTY
Radiated emissions (30MHz~1GHz)	±2.90dB
Radiated emissions (1GHz~18GHz)	±3.02dB
DC and low frequency voltages	±2%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	M SoM
BRAND NAME	Particle
MODEL NAME	M524
NOMINAL VOLTAGE	VCC: 3.8V. 3V3:3.3V
MODULATION TYPE	GSM/GPRS/EDGE: GMSK, 8PSK
OPERATING FREQUENCY	GSM 900 Tx: 880.2MHz ~ 914.8MHz Rx: 925.2MHz ~ 959.8MHz DCS 1800 Tx: 1710.2MHz ~ 1784.8MHz Rx: 1805.2MHz ~ 1879.8MHz
ANTENNA TYPE	Dipole Antenna
MAX. ANTENNA GAIN	GSM 900: 2.8dBi DCS 1800: 5.3dBi
HW VERSION	V0.2
SW VERSION	EG91EXGAR08A14M1G
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

2.2 CONDUCTED POWER

GSM900 & GSM1800

Band	GSM900			GSM1800		
Channel	975	38	124	512	698	885
Frequency (MHz)	880.2	897.6	914.8	1710.2	1747.4	1784.8
GSM	31.78	31.98	32.13	29.48	29.65	29.75
GPRS 1Tx Slot	31.80	31.99	32.15	29.50	29.64	29.77
GPRS 2Tx Slot	31.29	31.48	31.61	28.95	28.96	28.79
GPRS 3Tx Slot	29.72	29.94	30.02	27.02	26.88	27.06
GPRS 4Tx Slot	28.24	28.37	28.65	25.76	25.64	25.89
EDGE 1Tx Slot	25.39	25.56	25.42	25.51	25.46	25.48
EDGE 2Tx Slot	24.57	24.88	24.70	24.69	24.42	24.69
EDGE 3Tx Slot	23.70	23.82	23.82	23.10	22.69	22.88
EDGE 4Tx Slot	22.69	22.77	22.69	22.01	21.51	21.67

2.3 DESCRIPTION OF TEST MODES

✧ The EUT was tested under following conditions:

✧ BAND	OPERATING CONDITIONS	AXIS
GSM 900	Linking / Idle mode (CH 38)	Z-Plane
DCS 1800	Linking / Idle mode (CH 698)	Y-Plane

NOTE:

1. Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. Only the worst case was present in this report positioned. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

✧ The applicant defined the working voltage as follows:

NORMAL VOLTAGE (NV):	3.8V
MAXIMUM VOLTAGE (HV):	4.3V
MINIMUM VOLTAGE (LV):	3.3V

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

EN 301 511 V12.5.1 (2017-03)

All tests have been performed and recorded as per the above standard.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any other necessary accessories or support units.

For test

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.6 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photograph of the test configuration for reference.

3 TEST TYPES AND RESULTS

3.1 RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL

3.1.1 LIMIT OF RADIATED SPURIOUS EMISSIONS – MS ALLOCATED A CHANNEL

FOR GSM 900

FREQUENCY RANGE	Power level in dBm
30MHz ~ 1GHz	-36
1GHz ~ 4GHz	-30

FOR DCS 1800

FREQUENCY RANGE	Power level in dBm
30MHz ~ 1GHz	-36
1GHz ~ 1710MHz	-30
1710MHz ~ 1785MHz	-36
1785MHz ~ 4GHz	-30

3.1.2 TEST PROCEDURES

Refer to TS 151 010-1, clause 12.2.1.4.

3.1.3 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

3.1.5 TEST RESULTS

Note: For higher frequency, the emission is too low to be detected.

LINKING MODE AT MIDDLE CHANNEL GSM900 (CH 38)

FREQUENCY RANGE	30MHz ~ 4GHz	TEST VOLTAGE	230Vac, 50Hz
ENVIRONMENTAL CONDITIONS	22deg.C, 58%RH	TESTED BY	David Yuan
OPERATING CONDITIONS	Linking mode at middle channel (CH 38)		

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
60.35	H	-60.29	-36.00	-24.29
210.65	H	-70.13	-36.00	-34.13
388.85	H	-77.68	-36.00	-41.68
533.95	H	-64.50	-36.00	-28.50
674.30	H	-59.77	-36.00	-23.77
938.83	H	-46.26	-36.00	-10.26
1804.00	H	-54.44	-30.00	-24.44
2707.20	H	-52.60	-30.00	-22.60
SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
58.55	V	-55.01	-36.00	-19.01
210.20	V	-68.77	-36.00	-32.77
404.60	V	-78.42	-36.00	-42.42
588.20	V	-62.90	-36.00	-26.90
734.50	V	-55.33	-36.00	-19.33
989.72	V	-57.78	-36.00	-21.78
1804.00	V	-57.93	-30.00	-27.93
2707.20	V	-53.86	-30.00	-23.86



Test Report No.: W7L-P23120016RE01

LINKING MODE AT MIDDLE CHANNEL DCS1800 (CH 698)

FREQUENCY RANGE	30MHz ~ 4GHz	TEST VOLTAGE	230Vac, 50Hz
ENVIRONMENTAL CONDITIONS	22deg.C, 58%RH	TESTED BY	David Yuan
OPERATING CONDITIONS	Linking mode at middle channel (CH 698)		

PURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
63.05	H	-60.21	-36.00	-24.21
216.05	H	-65.87	-36.00	-29.87
294.80	H	-74.66	-36.00	-38.66
378.95	H	-70.11	-36.00	-34.11
610.00	H	-62.51	-36.00	-26.51
944.50	H	-58.16	-36.00	-22.16
3500.30	H	-44.21	-30.00	-14.21
SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
59.90	V	-58.41	-36.00	-22.41
211.10	V	-67.58	-36.00	-31.58
316.85	V	-77.00	-36.00	-41.00
424.85	V	-77.32	-36.00	-41.32
591.50	V	-62.61	-36.00	-26.61
872.00	V	-59.21	-36.00	-23.21
3500.30	V	-52.21	-30.00	-22.21

3.2 RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE

3.2.1 LIMIT OF RADIATED SPURIOUS EMISSIONS – MS IN IDLE MODE

FOR GSM 900 & DCS 1800

Frequency Range	Power level in dBm
30MHz ~ 880MHz	-57
880MHz ~ 915MHz	-59
915MHz ~ 1000MHz	-57
1GHz ~ 1710MHz	-47
1710MHz ~ 1785MHz	-53
1785MHz ~ 4GHz	-47

3.2.2 TEST PROCEDURES

Refer to TS 151 010-1 [2], clause 12.2.2.4.

3.2.3 TEST SETUP

For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST RESULTS

Note: For higher frequency, the emission is too low to be detected.

IDLE MODE AT MIDDLE CHANNEL GSM900 (CH 38)

FREQUENCY RANGE	30MHz ~ 4GHz	TEST VOLTAGE	230Vac, 50Hz
ENVIRONMENTAL CONDITIONS	22deg.C, 58%RH	TESTED BY	David Yuan
OPERATING CONDITIONS	Idle mode at middle channel (CH 38)		

SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
62.01	H	-60.50	-57.00	-3.50
210.42	H	-69.73	-57.00	-12.73
394.72	H	-77.27	-57.00	-20.27
486.87	H	-72.39	-57.00	-15.39
698.33	H	-75.96	-57.00	-18.96
942.77	H	-67.58	-57.00	-10.58
1521.45	H	-73.99	-47.00	-26.99
3357.04	H	-64.87	-47.00	-17.87
SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
61.04	V	-61.64	-57.00	-4.64
220.12	V	-69.44	-57.00	-12.44
413.15	V	-78.61	-57.00	-21.61
486.87	V	-74.74	-57.00	-17.74
669.23	V	-76.58	-57.00	-19.58
953.44	V	-71.08	-57.00	-14.08
1619.26	V	-71.94	-47.00	-24.94
3362.74	V	-65.58	-47.00	-18.58



Test Report No.: W7L-P23120016RE01


IDLE MODE AT MIDDLE CHANNEL DCS1800 (CH 698)

FREQUENCY RANGE	30MHz ~ 4GHz	TEST VOLTAGE	230Vac, 50Hz
ENVIRONMENTAL CONDITIONS	22deg.C, 58%RH	TESTED BY	David Yuan
OPERATING CONDITIONS	Idle mode at middle channel (CH 698)		


PURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
61.04	H	-61.62	-57.00	-4.62
244.37	H	-68.05	-57.00	-11.05
386.96	H	-77.44	-57.00	-20.44
486.87	H	-72.46	-57.00	-15.46
664.38	H	-76.95	-57.00	-19.95
890.39	H	-74.90	-59.00	-15.90
1618.66	H	-72.91	-47.00	-25.91
3404.29	H	-65.64	-47.00	-18.64
SPURIOUS EMISSION LEVEL				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
58.13	V	-61.72	-57.00	-4.72
227.88	V	-66.38	-57.00	-9.38
388.90	V	-76.33	-57.00	-19.33
486.87	V	-73.93	-57.00	-16.93
676.02	V	-76.99	-57.00	-19.99
915.61	V	-73.84	-57.00	-16.84
1704.17	V	-72.42	-47.00	-25.42
3444.34	V	-64.72	-47.00	-17.72

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

TX / RX SPURIOUS EMISSION TEST (BELOW 1GHz)

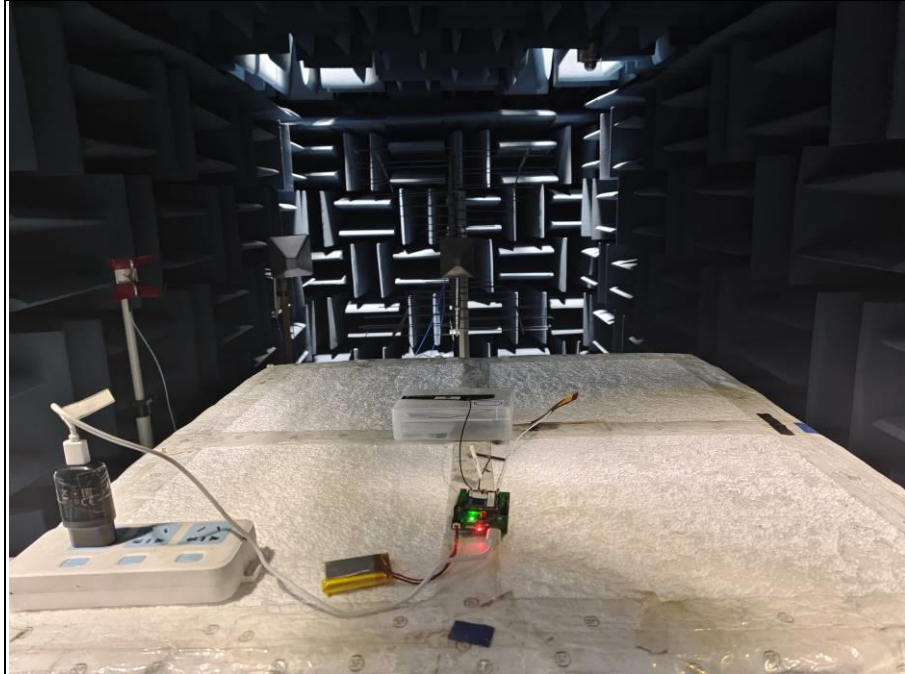

TX / RX SPURIOUS EMISSION TEST (ABOVE 1GHz)

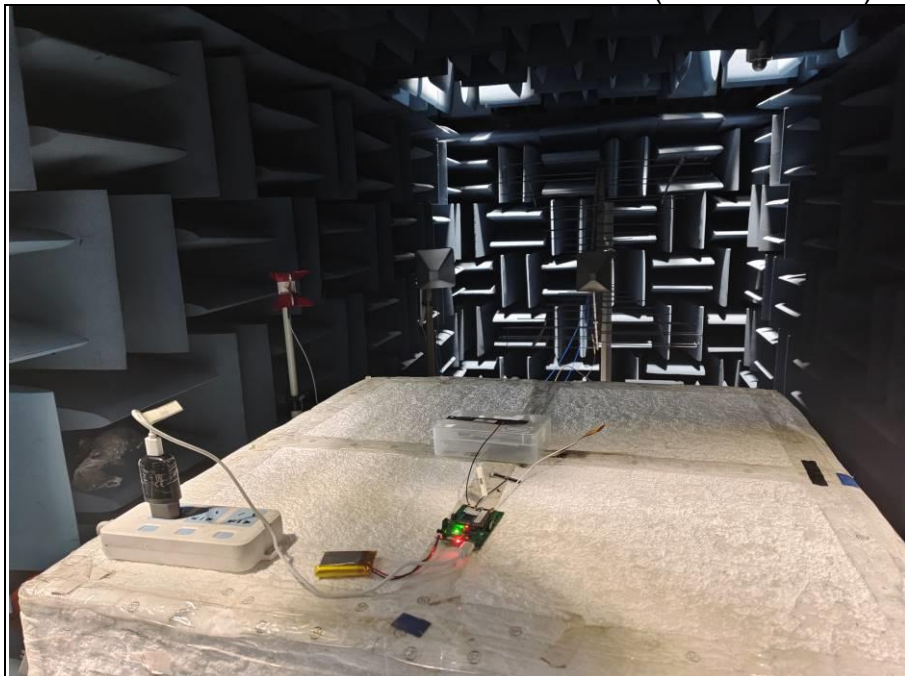



Test Report No.: W7L-P23120016RE01

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---