Report No.: RSZBHST160119125-1

1.2 米跌落检测报告 1.2M Drop Test Report

样 品 名 称: 可充电锂离子聚合物电池

Name of Samples: Rechargeable Lithium-Ion Polymer Battery

申请商名称: 深圳市比苛电池有限公司

Applicant's name: SHENZHEN PKCELL BATTERY CO., LTD.

深圳市北航检测有限公司 Shenzhen Beihang Testing Co., Ltd.





General information(基本资料)					
样品名称 Name of samples	可充电锂离子聚合物电池 Rechargeable Lithium-Ion Polymer Battery	样品外观颜色 Appearance	银色 Silver		
型号/规格 Type/Mode	LP103450 3.7Vd.c., 2000mAh, 7.4Wh	商标 Trade mark	PKCELL		
申请商名称 Applicant's name	深圳市比苛电池有限公司 SHENZHEN PKCELL BATTERY CO., LTD.				
申请商地址 Applicant's address	深圳市龙华新区中华路 24 号广明科技园 E2 栋 E2 Building, Guangming Technology Park, No.24 Zhonghua Road, Longhua New Area, Shenzhen, China.				
生产厂 Factory	深圳市比苛电池有限公司 SHENZHEN PKCELL BATTERY CO., LTD.				
生产厂地址 Factory's address	深圳市龙华新区中华路 24 号广明科技园 E2 栋 E2 Building, Guangming Technology Park, No.24 Zhonghua Road, Longhua New Area, Shenzhen, China.				
鉴定依据 Inspection according to	联合国《关于危险货物运输的建议书 规章范本》(18 修订版)特殊规定 188 条款 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Model Regulations(18 th Rev. edition) special provisions 188				
测试项目 Test item	1.2m Drop test				
鉴定结论 Certification	包装符合联合国《关于危险货物运输的建设书规章范本》(18 修订版) 特殊规定 188 条款 1,2 米跌落测试要求。 The package was capable of withstandic and of optest of UNITED NATIONS "Recommendations on the TRANSPOLIT" (1810) Rev. edition) special provisions 188. BUAA BUAA Date of issue:/ 日期. Jan.19, 2016				

Tested by:

主 检:

吴涛施

Reviewed by:

wed by: _{审核:} 商至至

> Phone: +86 755 8650 3482 Fax: +86 755 8650 3182 http://www.hc-stc.net

Approved by:

批准: 钟文





Package information (包装信息)				
包装件信息 Information for the package	每包装件毛重 Gross weight per package	Approx. 12.3kg		
	每包装件电池的净重 Net quantity of batteries per package	Approx. 1.70kg		
	包装件含电池个数 Number of batteries per package	60pcs		
包装件所含设备信息 Information for equipment in the package	设备名称 Name of equipment	移动网络物联网智能模块 Mobile Network IOT Smart Module		
	型号 Type/Mode	Electron		
	商标 Trade mark	N/A		

备注 / Remarks:

防短路及意外启用的内部包装方式是: 独立小包装

The manner of inner packaging that can prevent short circuits and accidental operation: Independent packaging.

Phone: +86 755 8650 3482 Fax: +86 755 8650 3182 http://www.hc-stc.net Report No.: RSZBHST160119125-1



Photos of packages (包装照片)

package / 包装












Shenzhen Beihang Testing Co., Ltd.


Report No.: RSZBHST160119125-1



Photos of Samples (样品照片)

Rechargeable Lithium-Ion Polymer Battery /可充电锂离子聚合物电池(3.7Vd.c., 2000mAh, 7.4Wh)

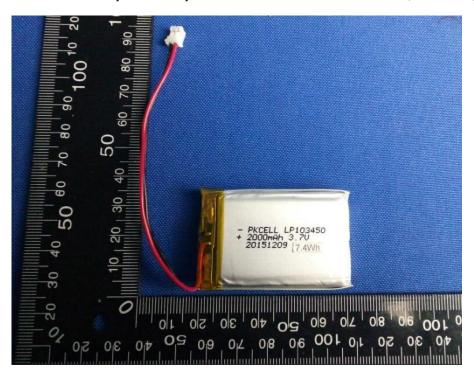

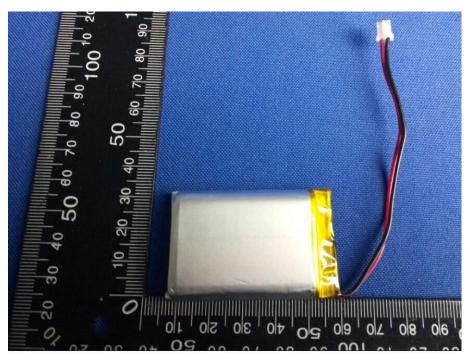

Shenzhen Beihang Testing Co., Ltd.





1.2m Drop test(1.2 米跌落测试)					
Test Items 测试项目	Drop test 跌落测试				
1.1	Test procedure 测试步骤				
	The package of batteries is dropped from 1,2m in any orientation. The test floor is concrete floor. 电池的包装件以任意方向从 1,2 米跌落至水泥地面。				
	Each package is capable of withstanding a 1,2m drop test in any orientation without damage to cells or batteries contained therein, without shifting of the contents so as to allow battery to battery(or cell to cell) contact and without release of contents. 每个电池的包装件以任意方向从 1,2 米跌落,而没有造成包装件内的电池或电芯的损坏,也没有移动包装件内的电池或电芯使其相互接触以及包装件内的电池或电芯漏出。				
1.2	Result 测试结果				
		Surface 面跌落	The package is not cracked, the contents are not damaged and not shifted. 包装未破裂,内装物完好。		
	No batteries or cells is damaged or connected by neighbor, the batteries or cells should not be released from package. 包装件内的电池或电芯无损坏,无相互接触。包装件内的电池或电芯不能从包装件漏出。	Arris 棱跌落	The package is not cracked, the contents are not damaged and not shifted. 包装未破裂,内装物完好。		
		Angle 角跌落	The package is not cracked, the contents are not damaged and not shifted. 包装未破裂,内装物完好。		

-- End of Test Report--

Phone: +86 755 8650 3482 Fax: +86 755 8650 3182 http://www.hc-stc.net